


# HySense® PR 130 I5



Dimensions in mm

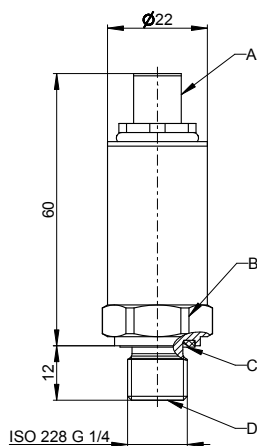

|   |  |
|---|--|
| A | M12 x 1, 4-pin                           |
| B | AF 22                                    |
| C | ED seal in conformity with DIN 3869, FKM |

## Characteristics

|                         |   |
|-------------------------|---|
| Output signal           | 4 ... 20 mA, 0 ... 10 VDC               |
| Electrical connector    | M12 x 1, 4-pin                          |
| Mechanical connection   | ISO 228-G 1/4                           |
| IP degree of protection | IP67 (DIN EN 60529)                     |
| Weight                  | 80 ... 100 g (depending on the version) |

## Part No.

| Measuring range*<br>bar | 4 ... 20 mA    | 0 ... 10 VDC   |
|-------------------------|----------------|----------------|
| -1 ... 6                | 3403-32-I5.37S | 3403-32-I5.39S |
| 0 ... 60                | 3403-21-I5.37S | 3403-21-I5.39S |
| 0 ... 250               | 3403-17-I5.37S | 3403-17-I5.39S |
| 0 ... 400               | 3403-15-I5.37S | 3403-15-I5.39S |
| 0 ... 600               | 3403-18-I5.37S | 3403-18-I5.39S |
| 0 ... 1000              | 3403-29-I5.37S | 3403-29-I5.39S |

\* More available upon request