


# IM1– 4-digit digital panel meter in 48x24 mm (BxH) Current loop 4-20 mA

- red display of -1999...9999 digits
- minimal installation depth: 27 mm without plug-in terminal
- min/max-value recording
- adjustment via factory default or directly on the sensor signal
- 10 adjustable support points
- display flashing at threshold value exceedance / undercut
- tara-function
- programming interlock via access code
- protection class IP65 at the front
- plug-in terminal
- navigation keys for the triggering of min/max-values or for threshold value corrections during operation
- accessories: pc-based configuration-kit PM-TOOL with CD & USB adapter
- on request: devices for working temperatures of -25°C...60°C or of -40°C...80°C



**ORDER NUMBER**                      **EUR**  
(without options)

## • Direct current 4-20 mA

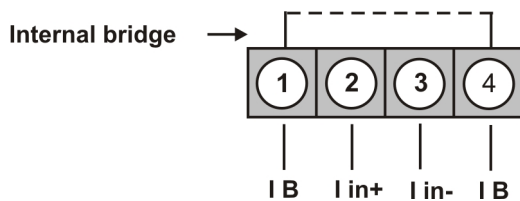

**IM1-7SR4A.0001.K70xD**                      **127.10**

## • Product key options

IM	1-	7	S	R	4	A.	0	0	0	1.	K	7	0	x	D	<b>EUR</b>
													1	without keypad, operation on the back	<b>10.60</b>	

Please state physical unit on demand, e.g. A.

## • Parameterisation software


PC based configuration software PM-Tool for devices without keypad, for a simple adjustment of standard devices, incl. CD & USB-adapter. Programming happens via an interface on the back.

**PM-TOOL-MUSB4**                      **94.30**

## • Technical data

<b>Dimensions</b>	Housing	B48 x H24 x D27 mm (incl. plug-in terminal D=54 mm)
	Panel cut-out	45.0 <sup>+0.8</sup> x 22.2 <sup>+0.6</sup> mm
	Fixing	screw elements for wall thickness up to 3 mm
	Housing material	PC Polycarbonate, black
	Sealing material	EPDM, 65 Shore, black
	Protection class	front IP65 standard, rear side IP00
	Weight	approx. 50 g
	Connection	plug terminal; line cross section up to 2.5 mm <sup>2</sup>
<b>Display</b>	Digit height	10 mm
	Segment colour	red
	Display range	-1999 to 9999
	Setpoints	optical display flashing
	Overflow	horizontal bars at the top
	Underflow	horizontal bars at the bottom
	Display/measuring time	0.1 to 10.0 seconds
<b>Measuring input</b>	Input	min. 3.5...max. 21 mA
	Measuring range	4-20 mA
	Measuring fault	0.3% of measuring range, ± 1 digit
		Measuring fault at measuring time = 1 second
	Fail of voltage	approx. 5.1 V
	Temperature drift	100 ppm/K
	Measuring principle	successive approximation
	Resolution	12 bit-converter 14 bit (noiseless by oversampling at 1 sec measuring time)
<b>Memory</b>	Flash-memory (independent of supply)	
	Data life	≥ 100 years at 25°C
<b>Ambient conditions</b>	Working temperature	0 to +60°C
	Storing temperature	-20 to +80°C
	Climatic density	relative humidity 0-80% on years average without dew
<b>CE-sign</b>	Conformity to directive 2014/30/EU	
<b>EMV</b>	EN 61326, EN 55011	
<b>Safety standard</b>	according to low voltage directive 2014/35/EU, EN 61010; EN 60664-1	

## Housing:

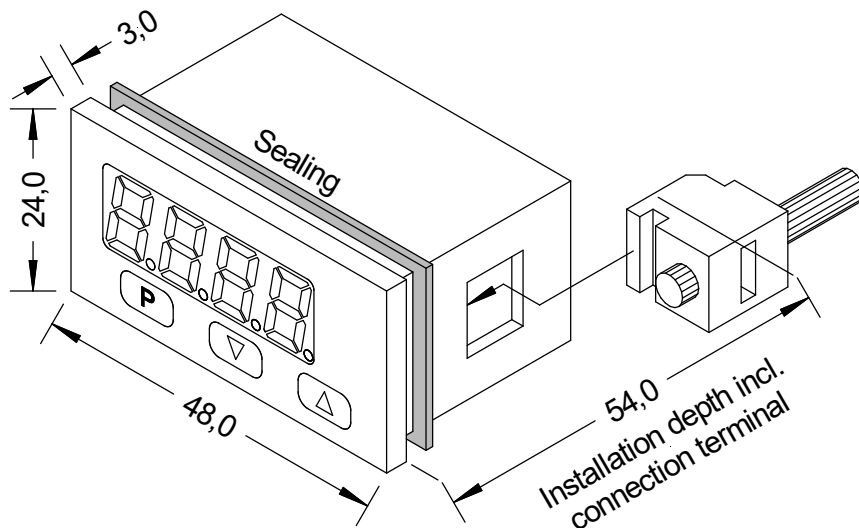

• Ordering code

	IM	1-	7	S	R	4	A.	0	0	0	1.	K	7	0	x	D	
<b>Basic type M-Line</b>																	<b>Dimension</b>
																	D physical unit (free selectable)
<b>Installation depth</b>																	<b>Version</b>
54 mm incl. plug-in terminal																	x internal version
<b>Housing size</b>																	<b>Setpoints</b>
48 x 24 x 27 mm																	0 without
<b>Display type</b>																	<b>Protection</b>
Current loop																	1 without keypad, operation via PM-TOOL
<b>Display colour</b>																	7 IP65 / plug-in terminal
Red																	<b>Supply voltage</b>
<b>Number of digits</b>																	K via current loop
4-digit																	<b>Measuring input</b>
<b>Digit height</b>																	1 direct current 4-20 mA
10 mm																	<b>Analog output</b>
<b>Interface</b>																	0 without
without																	<b>Sensor supply</b>
																	0 without