



IM3 – 5-digit digital panel meter in 96x24 mm (BxH) Thermocouple type L, J, K, B, S, N, E, T, R

- red display from -19999...99999 digits (optional green, orange, blue or tricolour display)
- installation depth: 120 mm without plug-in screw terminal
- multi voltage power supply unit 100-240 VAC, alternatively 10-40 VDC galv. isolated
- adjustment via factory setting or directly on the sensor signal
- min/max-memory with adjustable permanent display
- display flashing at threshold value exceedance / undercut
- flexible alarm system with adjustable delay times
- brightness control via parameter or front keys
- programming interlock via access code
- protection class IP65 at the front
- plug-in screw terminal
- optional: 1 or 2 relay outputs
- optional: 1 independently scalable analog output
- optional: interface RS232 or RS485
- accessories: pc-based configuration-kit PM-TOOL with CD & USB adapter
- on request: devices for working temperatures of -20°C...60°C or -40°C...70°C

ORDER NUMBER


EUR

(without options)





• **Thermocouple type L, J, K, B, S, N, E, T, R**

Supply 100-240 VAC, DC ±10% **IM3-3TR5B.040X.S70xD** 280.60

Supply 10-40 VDC, 18-30 VAC **IM3-3TR5B.040X.W70xD** 280.60

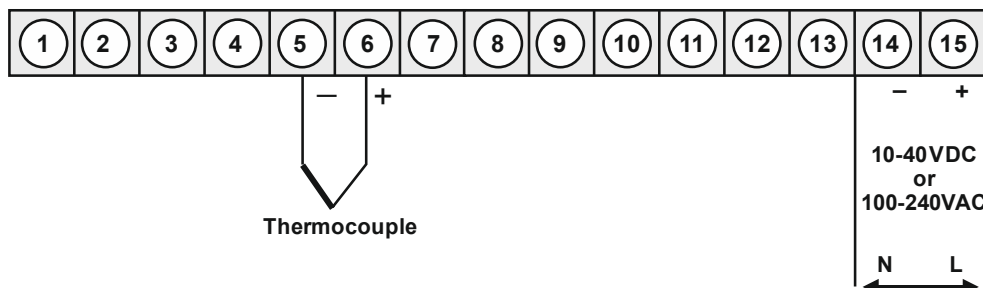

Options:

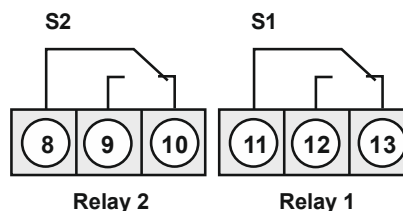

Alternatively to analog output

• **Product key options**

IM	3-	3	T	R	5	B.	0	4	0	X.	S	7	0	x	D
IM	3-	3	T	R	5	B.	0	4	0	X.	W	7	0	x	D

		EUR
1	1 relay output (with option analog output only 1 switching point is possible)	21.20
2	2 relay outputs	31.80
1	without keypad, operation via PC software PM-TOOL	10.60
X	Analog output 0/4-20 mA, 0-10 VDC	105.90
3	Interface RS232 galv. isolated	68.80
4	Interface RS485 galv. isolated	68.80
B	Blue	46.60
G	Green	10.10
Y	Orange	10.10
T	Tricolour (Red-Green-Orange)	31.80

On demand state dimension unit on order, e.g. °F.

• **Parameterisation software**

PC based configuration software PM-Tool for devices without keypad, for a simple adjustment of standard devices, incl. CD & USB-adapter. Programming happens via an interface on the back.


PM-TOOL-MUSB4

94.30

• **Technical data**

Dimensions	Housing	B96 x H24 x D120 mm, (incl. plug-in terminal D= 145 mm cable outlet at the back)	
	Panel cut-out	92.0 ^{+0.8} x 22.2 ^{+0.3} mm	
	Fixing	screw elements for a wall thickness up to 10 mm	
	Housing material	PC Polycarbonate, black	
	Sealing material	EPDM, 65 Shore, black	
	Protection class	at the front IP65 standard, at the back IP00	
	Weight	approx. 250 g	
	Connection	plug-in terminal; wire cross section up to 2.5 mm ²	
Display	Display	5-digit	
	Digit height	14 mm	
	Segment colour	red (Standard), optional in green, orange, blue or tricolour (red/green/orange)	
	Range of display	-19999 to 99999	
	Threshold value	optical display flashing	
	Overflow	horizontal bars at the top	
	Underflow	horizontal bars at the bottom	
	Display time	0.1 to 10.0 seconds	
Measuring input	Measuring range	Type L -200...900°C Type J -210...1200°C Type K -270...1372°C Type B 80...1820°C Type S -50...1768°C Type N -270...1300°C Type E -270...1000°C Type T -270...400°C Type R -50...1768°C	
	Measuring fault	2 K, ± 1 digit	
	Temperature drift	100 ppm/K	
	Measuring time	0.1 ... 10.0 seconds	
	Measuring principle	U/F-conversion	
	Resolution	0.1°C	
	Characteristic line fault	<±1 K	
	Reference junction	Thermistor	
	Output	Relay	with change-over contact 250 V / 2 AAC, 30 V / 2 ADC
		Switching cycle	30 * 10 ³ at 2 AAC, 2 ADC ohm resistive burden, 10 * 10 ⁶ mechanically Separation according to DIN EN50178 / Specific values according to DIN EN 60255
		Analog output	0-10 VDC / burden ≥ 10 kΩ, 0/4-20 mA / burden ≤ 500 Ω, 16 bit
	Interface	Protocol	Modbus with ASCII or RTU-protocol
RS232		9.600 Baud, no parity, 8 DataBit, 1 StopBit, pipeline length max. 3 m	
RS485		9.600 Baud, no parity, 8 DataBit, 1 StopBit, pipeline length max. 1000 m	
Power pack	Supply	100-240 VAC 50/60 Hz, DC ±10 % (max. 10 VA) 10-40 VDC galv. isolated, 18-30 VAC 50/60 Hz (max. 10 VA)	
	Memory	EEPROM Data preservation ≥ 100 years at 25°C	
Ambient condition	Working temperature	0 to +50°C	
	Storing temperature	-20 to +80°C	
	Climatic density	relative humidity 0-85% on years average without dew	
CE-sign EMV	Conformity to directive 2014/30/EU EN 61326, EN 55011		
	Safety standard according to low voltage directive 2014/35/EU, EN 61010; EN 60664-1		

Housing:

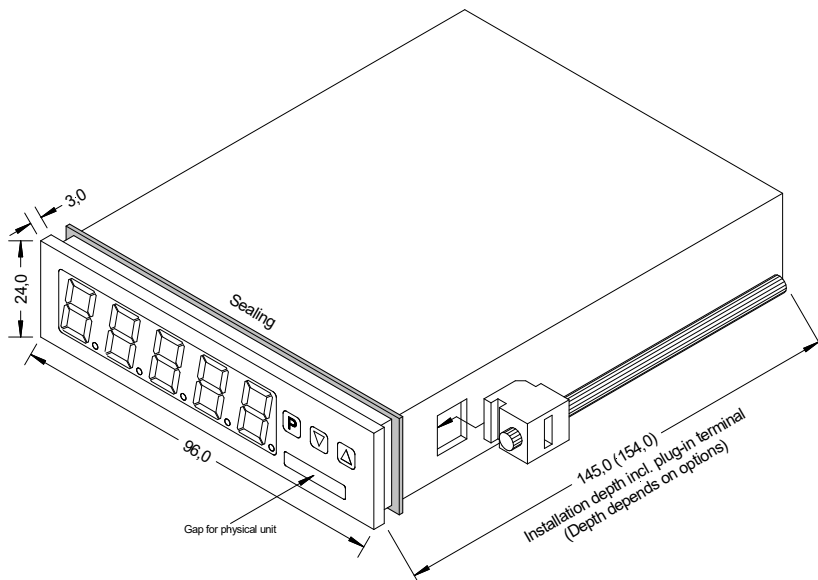

• Order key

	IM	3-	3	T	R	5	B.	0	4	0	X.	W	7	0	x	D	
Standard type M-Line																	Dimension
																	<input type="checkbox"/> D physical unit (free selectable)
Installation depth																	Version
145 mm incl. plug-in terminal (154 mm)																	<input type="checkbox"/> x Internal version
Housing size																	Switching points
96x24x120 mm (BxHxD)																	<input type="checkbox"/> 0 without
																	<input type="checkbox"/> 1 2 relay output
																	<input type="checkbox"/> 2 2 relay outputs
Display type																	Protection class
Temperature																	<input type="checkbox"/> 1 without keypad, operation via PM-TOOL
																	<input type="checkbox"/> 7 IP65 / plug-in terminal
Display colours																	Supply voltage
Blue																	<input type="checkbox"/> S 100-240 VAC
Green																	<input type="checkbox"/> W 10-40 VDC
Red																	
Red/Green/Orange																	
Orange																	
Number of digits																	Measuring input
5-digits																	<input type="checkbox"/> X Thermocouple
Digit height																	Analog output
14 mm																	<input type="checkbox"/> 0 without
																	<input type="checkbox"/> X 1x 0-10 VDC, 0/4-20 mA
Digital input																	Thermocouple
without																	<input type="checkbox"/> 1 Type L, J, K, B, S, N, E, T, R
Interface RS232																	
Interface RS485																	