

IDS 200 P

Electronic Pressure Switch with Flush Process Connection

- ▶ piezoresistive pressure sensor
- ▶ up to 4 independent contacts, configurable
- ▶ optional:
 - analogue output
 - Ex-protection (for 2-wire)
 - cooling element up to 300 °C
- ▶ nominal pressure ranges from 0 ... 100 mbar up to 0 ... 40 bar



Description

The electronic pressure switch IDS 200 P is the successful combination of

- ▶ intelligent pressure switch
- ▶ digital display

and is suitable for the usage with viscous and pasty media which are compatible with stainless steel 1.4435 (316L) and the sealing material. The IDS 200 P has a flush diaphragm and can be delivered with inch thread, as well as with different process connections like clamp or dairy pipe. For use with higher media temperature the IDS 200 P can optionally be supplied with a cooling element.

Operation

The rotatable display module shows the system pressure and allows programming. The configuration is menu controlled and easy to handle without previous knowledge.

Applications

- ▶ foodstuff industry
- ▶ pharmacy
- ▶ chemical industry

- ▶ indication of measured values on a 4-digit LED display
- ▶ rotatable and configurable display module
- ▶ configurable contacts (switch on / switch off points, hysteresis / window mode, switch on / switch off delay)
- ▶ option analogue output:
 - 4 ... 20 mA / 2-wire **Ex-protection optionally**
 - 4 ... 20 mA / 3-wire **with turn-down 1:5**
 - 0 ... 10 V / 3-wire
- ▶ special functions (access protection, min. / max. value memory)
- ▶ industrial standard in view of accuracy, thermal behaviour and long term stability



Characteristics

IDS 200P
Electronic Pressure Switch



Input pressure range																																		
Nominal pressure gauge	[bar]	-1 ... 0	0.1	0.16	0.25	0.4	0.6	1	1.6	2.5	4	6	10	16	25	40																		
Nominal pressure abs.	[bar]	-	-	-	-	-	0.6	1	1.6	2.5	4	6	10	16	25	40																		
Level	[bar]	3	1	1	1	1	3	3	6	6	20	20	60	60	60	100																		
Contact¹																																		
Standard	1 PNP contact																																	
Options	2 independent PNP contacts 4 independent PNP contacts (possible with M12x1, 8-pin for 4 ... 20 mA/3-wire; 0 ... 10 V/3-wire on request)																																	
Max. switching current	4 ... 20 mA / 2- and 3-wire: contact rating 125 mA, short-circuit resistant; $V_{\text{Switch}} = V_s - 2V$ 0 ... 10 V / 3-wire: contact rating 500 mA, short-circuit resistant																																	
Accuracy of contacts	standard: nominal pressure > 0.4 bar: nominal pressure ≤ 0.4 bar: option: nominal pressure > 0.4 bar:							IEC 60770	BFSL																									
Repeatability	$\leq \pm 0.1\% \text{ FSO}$																																	
Switching frequency	max. 10 Hz																																	
Switching cycles	$> 100 \times 10^6$																																	
Delay time	0 ... 100 s																																	
¹ max. 1 contact for 2-wire current signal with plug ISO 4400 as well as 2-wire current signal with Ex-protection no contact possible with 3-wire voltage signal with plug ISO 4400																																		
Analogue output (optionally) / Supply																																		
2-wire current signal	$4 \dots 20 \text{ mA} / V_s = 18 \dots 41 \text{ V}_{\text{DC}}$ permissible load: $R_{\text{max}} = [(V_s - V_{s,\text{min}}) / 0.02] \Omega$														response time: < 10 ms																			
2-wire current signal with Ex-protection	$4 \dots 20 \text{ mA} / V_s = 17 \dots 28 \text{ V}_{\text{DC}}$ permissible load: $R_{\text{max}} = [(V_s - V_{s,\text{min}}) / 0.02] \Omega$														response time: < 10 ms																			
3-wire current signal	$4 \dots 20 \text{ mA} / V_s = 19 \dots 30 \text{ V}_{\text{DC}}$ adjustable (turn-down of span 1:5) ² permissible load: $R_{\text{max}} = 500 \Omega$														response time: < 1 s																			
3-wire voltage signal	$0 \dots 10 \text{ V} / V_s = 15 \dots 36 \text{ V}_{\text{DC}}$ permissible load: $R_{\text{min}} = 10 \text{ k}\Omega$														response time: < 10 ms																			
Without analogue output	$V_s = 15 \dots 36 \text{ V}_{\text{DC}}$																																	
Accuracy	standard: nominal pressure > 0.4 bar: nominal pressure ≤ 0.4 bar: option: nominal pressure > 0.4 bar:							IEC 60770 ³	BFSL																									
² with turn-down of span the analogue signal is adjusted automatically to the new measuring range ³ accuracy according to IEC 60770 – limit point adjustment (non-linearity, hysteresis, repeatability)																																		
Thermal errors (offset and span)⁴ / Permissible temperatures																																		
Nominal pressure P_N	[bar]	-1 ... 0	≤ 0.1	≤ 0.25	≤ 0.4	≤ 1	≥ 1	≥ 1	≥ 1	≥ 1	≥ 1	≥ 1	≥ 1	≥ 1																				
Tolerance band	[% FSO]	≤ ± 0.75	≤ ± 2	≤ ± 1.5	≤ ± 1	≤ ± 1	≤ ± 1	≤ ± 1	≤ ± 1	≤ ± 1	≤ ± 1	≤ ± 1	≤ ± 1	≤ ± 0.75																				
TC, average	[% FSO / 10 K]	± 0.12	± 0.4	± 0.3	± 0.2	± 0.2	± 0.15	± 0.15	± 0.15	± 0.15	± 0.15	± 0.15	± 0.15	± 0.12																				
in compensated range	[°C]	0 ... 70		0 ... 50			0 ... 70																											
Permissible temperatures	medium: -25 ... 125 °C ⁵ electronics / environment: -25 ... 85 °C storage: -40 ... 85 °C																																	
⁴ an optional cooling element can influence thermal effects for offset and span depending on installation position and filling conditions ⁵ for vacuum ranges and nominal pressure abs. the max. medium temperature is 70 °C; with optional cooling element its maximum permissible temperature is valid																																		
Electrical protection																																		
Short-circuit protection	permanent																																	
Reverse polarity protection	no damage, but also no function																																	
Electromagnetic compatibility	emission and immunity according to EN 61326																																	
Mechanical stability																																		
Vibration	5 g RMS (20 ... 2000 Hz)																																	
Shock	100 g / 11 msec																																	
Filling fluids																																		
Standard	silicon oil																																	
Optional	food compatible oil (with FDA approval) / Halocarbon and others on request																																	
Materials																																		
Pressure port	stainless steel 1.4435 (316L)																																	
Housing	stainless steel 1.4301 (304)																																	
Display housing	PA 6.6, Polycarbonate																																	
Seals (media wetted)	inch thread: standard: FKM (recommended for medium temperatures ≤ 200 °C) optionally: FFKM (recommended for medium temperatures > 200 °C) others on request																																	
Diaphragm	clamp and dairy pipe: without																																	
Media wetted parts	stainless steel 1.4435 (316L)																																	
pressure port, seals, diaphragm																																		

Explosion protection (for 2-wire current signal with Ex-protection)	
Approval AX11-DS 200 P	zone (0) 1: II (1) 2 G Ex ia IIC T4
Safety technical maximum values	$U_i = 28 \text{ V}$, $I_i = 93 \text{ mA}$, $P_i = 660 \text{ mW}$
Max. switching current ⁶	70 mA (max. permissible inductivity: 4.7 mH)
Permissible temperatures for environment	-20 ... 70 °C
Connecting cables (by factory)	cable capacitance: signal line/shield also signal line/signal line: 160 pF/m cable inductance: signal line/shield also signal line/signal line: 1 µH/m


⁶ the real switching current in the application depends on the power supply unit

Miscellaneous

Display	4-digit, red 7-segment-LED display, digit height 7 mm, range of indication -1999 ... +9999; accuracy 0.1 % ± 1 digit; digital damping 0.3 ... 30 sec (programmable); measured value update 0.0 ... 10 sec (programmable)
Current consumption (without contacts)	2-wire signal output current: max. 25 mA 3-wire signal output current: approx. 45 mA + signal current 3-wire signal output voltage: approx. 45 mA
Ingress protection	IP 65
Installation position	any ⁷
Weight	approx. 160 ... 250 g
Operational life	> 100 × 10 ⁶ cycles

⁷ Pressure switches are calibrated in a vertical position with the pressure connection down. If this position is changed on installation there can be slight deviation in the zero point for pressure ranges ≤ 1 bar. Therefore installation position has to be given in this case.


Wiring diagrams

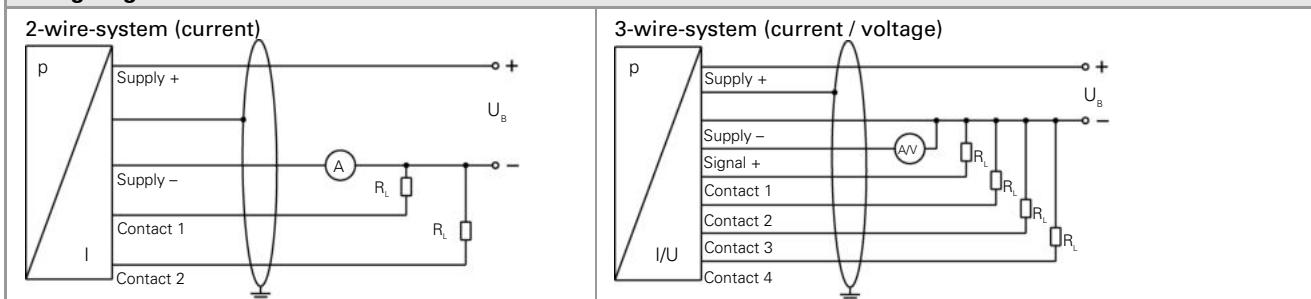

Pin configuration

Electrical connection	M12x1 plastic (5-pin)	M12x1 metal (5-pin)	M12x1 plastic (8-pin)	ISO 4400	cable colours (DIN 47100)
Supply +	1	1	1	1	white
Supply -	3	3	3	2	brown
Signal + (only 3-wire)	2	2	2	3	green
Contact 1	4	4	4	3	grey
Contact 2	5	5	5	-	pink
Contact 3	-	-	6	-	-
Contact 4	-	-	7	-	-
Ground	via pressure port	plug housing / pressure port	via pressure port	ground contact	yellow / green (shield)


Electrical connections (dimensions in mm)

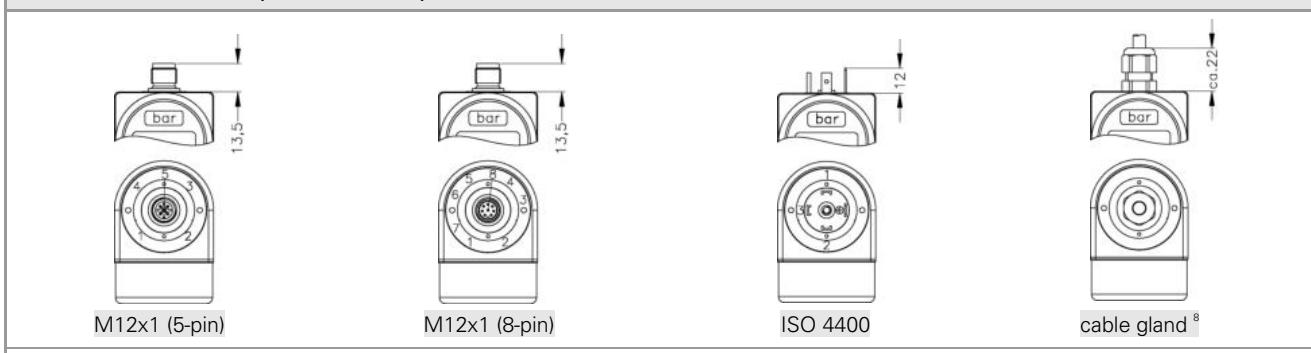



⁸ different cable types and lengths available; standard: 2 m PVC cable (without ventilation tube)

Mechanical connections (dimensions in mm)

Inch thread (DIN 3852)

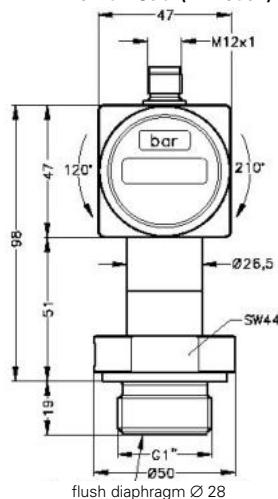


Clamp (ISO 2852)

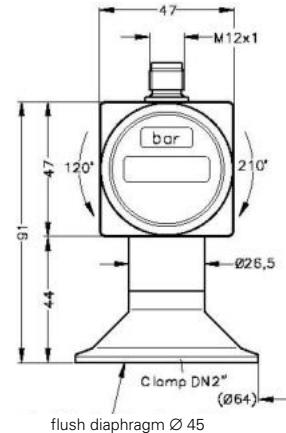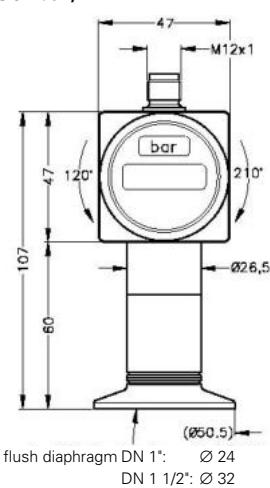


DN 1" or DN 1 1/2"

DN2"




G1" flush

Dairy pipe (DIN 11851)

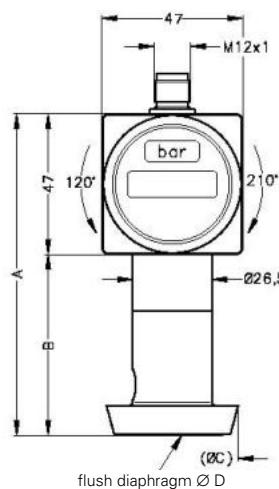

Cooling element

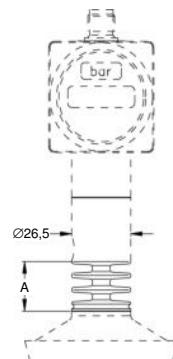

	temperature range	150° C	300° C
size A		22	34
number of cooling fins		2	3

dimensions in mm		
size	DN 25	DN 40
A	107	89
B	71	53
C	44	56
D	24	32
	89	68,5

⇒ Ex-protection: total length increases by 20 mm!

Ordering code IDS 200P

IDS 200P

A horizontal sequence of 15 empty rectangular boxes, arranged in three rows of five. This visual representation likely corresponds to a sequence of 15 numbers or items being listed.

¹ nominal pressure absolute not possible for $P_N < 0.6$ bar

² for vacuum and nominal pressure abs. the max. medium temperature is 70 °C

³ with Ex version max. 1 contact is possible

⁴ with connector ISO 4400 and output 2-wire version only max. 1 contact possible; with 3-wire version no contact possible

5 4 contacts and M12x1, 8-pin only possible in combination and together with 4 ... 20 mA/3-wire; **0** ... 10 V/3-wire on request

6 contacts and M12x1, 5 pin only possible in combination and together with 4 ... 20 mA/Vc wire, 8 ... 16 Vc wire on request

7 The cup nut for dairy pipe has to be ordered as separate position.

8 Name of oil: Mobil DTE EM 32; Category Code: H1; NSF Registration No : 130662