



IDS 202

Electronic Pressure Switch

welded, dry Stainless Steel Sensor

accuracy according to IEC 60770:
0.5 % FSO

Nominal pressure

from 0 ... 6 bar up to 0 ... 600 bar

Contacts

1, 2 or 4 independent PNP contacts,
freely configurable

Analogue output

2-wire: 4 ... 20 mA
3-wire: 4 ... 20 mA / 0 ... 10 V
others on request

Special characteristics

- ▶ indication of measured values on a 4-digit LED display
- ▶ rotatable and configurable display module

Optional versions

- ▶ **IS-version**
Ex ia = intrinsically safe for gases
- ▶ oxygen application
- ▶ customer specific versions





The electronic pressure switch IDS202 is the successful combination of

- ▶ robust pressure transmitter
- ▶ digital display

and has been specially designed for numerous applications in various industrial sectors.

As standard the IDS202 offers a PNP contact and a rotatable display module with 4-digit LED display. The transmitters are suitable for an unrestricted use in oxygen applications up to 600 bar and an intrinsically safe IS-Version.

Preferred areas of use are

-  Medical Technology
-  Plant and Machine Engineering
-  Refrigeration
-  Oxygen application



| Input pressure range | | | | | | | | | | | | |
|------------------------|-------|-----------|----|----|-----|-----|-----|-----|-----|------|------|------|
| Nominal pressure gauge | [bar] | 6 | 10 | 16 | 25 | 40 | 60 | 100 | 160 | 250 | 400 | 600 |
| Overpressure | [bar] | 14 | 35 | 35 | 70 | 140 | 140 | 350 | 350 | 700 | 1200 | 1200 |
| Burst pressure \geq | [bar] | 35 | 85 | 85 | 175 | 350 | 350 | 850 | 850 | 1750 | 2800 | 2800 |
| Vacuum resistance | | unlimited | | | | | | | | | | |

| Contact ¹ | |
|-----------------------------------|---|
| Number, type | standard: 1 PNP contact option: 2 independent PNP contacts 4 independent PNP contacts (possible with M12x1 8-pin for 4 ... 20 mA / 3-wire) |
| Max. switching current | 4 ... 20 mA / 2- and 3-wire: contact rating 125 mA, short-circuit resistant; $V_{switch} = V_S - 2V$ 0 ... 10 V / 3-wire: contact rating 125 mA, short-circuit resistant |
| Accuracy of contacts ² | $\leq \pm 0.5\%$ FSO |
| Repeatability | $\leq \pm 0.1\%$ FSO |
| Switching frequency | max. 10 Hz |
| Switching cycles | $> 100 \times 10^6$ |
| Delay time | 0 ... 100 sec |

¹ with IS-protection max. 1 contact possible

| Analogue output (optionally) / Supply | |
|--|---|
| 2-wire current signal | 4 ... 20 mA / $V_S = 13 \dots 36 V_{DC}$ permissible load: $R_{max} = [(V_S - V_{Smin}) / 0.02 A] \Omega$ response time: < 10 msec |
| 2-wire current signal with IS-protection | 4 ... 20 mA / $V_S = 15 \dots 28 V_{DC}$ permissible load: $R_{max} = [(V_S - V_{Smin}) / 0.02 A] \Omega$ response time: < 10 msec |
| 3-wire current signal | 4 ... 20 mA / $V_S = 19 \dots 30 V_{DC}$ permissible load: $R_{max} = 500 k\Omega$ adjustable (turn-down of span up to 1:5) ³ |
| 3-wire voltage signal | 0 ... 10 V / $V_S = 15 \dots 36 V_{DC}$ permissible load: $R_{min} = 10 k\Omega$ |
| without analogue output | $V_S = 15 \dots 36 V_{DC}$ |
| Accuracy ² | $\leq \pm 0.5\%$ FSO |

² accuracy according to IEC 60770 – limit point adjustment (non-linearity, hysteresis, repeatability)

³ with turn-down of span the analogue signal is adjusted automatically to the new measuring range

| Thermal effects (Offset and Span) | |
|-----------------------------------|---|
| Thermal error | $\pm 0.3\%$ FSO / 10 K |
| in compensated range | 0 ... 70 °C |
| Permissible temperatures | |
| Permissible temperatures | medium: -40 ... 125 °C electronics / environment: -40 ... 85 °C storage: -40 ... 100 °C |

| Electrical protection | |
|-------------------------------|---|
| Short-circuit protection | permanent |
| Reverse polarity protection | no damage, but also no function |
| Electromagnetic compatibility | emission and immunity according to EN 61326 |

| Mechanical stability | |
|----------------------|---|
| Vibration | 10 g RMS (25 ... 2000 Hz) according to DIN EN 60068-2-6 |
| Shock | 500 g / 1 msec according to DIN EN 60068-2-27 |

| Materials | |
|----------------------|---------------------------------|
| Pressure port | stainless steel 1.4571 (316 Ti) |
| Housing | stainless steel 1.4404 (316 L) |
| Display housing | PA 6.6, polycarbonate |
| Seals (media wetted) | none (welded) |
| Diaphragm | stainless steel 1.4542 (17-4PH) |
| Media wetted parts | pressure port, diaphragm |

| Explosion protection (only for 4 ... 20 mA / 2-wire) | |
|--|--|
| Approval AX14-DS 202 | IBExU 06 ATEX 1050 X zone 1: II 2G Ex ia IIC T4 Gb (connector) / II 2G Ex ia IIB T4 Gb (cable) |
| Safety technical maximum values | $U_i = 28 V$, $I_i = 93 mA$, $P_i = 660 mW$, $C \approx 0 nF$, $L_i \approx 0 \mu H$ |
| Max. switching current ⁴ | 70 mA |
| Permissible temperatures for environment | -25 ... 70 °C |
| Connecting cables (by factory) | cable capacitance: signal line/shield also signal line/signal line: 100 pF/m cable inductance: signal line/shield also signal line/signal line: 1 $\mu H/m$ |


⁴ the real switching current in the application depends on the power supply unit

Miscellaneous

| | |
|--|---|
| Display | 4-digit, red 7-segment-LED display, digit height 7 mm, digit width 4.85 mm (angle 10°); range of indication -1999 ... +9999; accuracy 0.1 % ± 1 digit; digital damping 0.3 ... 30 sec (programmable); measured value update 0.0 ... 10 sec (programmable) |
| Current consumption (without contacts) | 2-wire signal output current: max. 25 mA 3-wire signal output current: approx. 45 mA + signal current 3-wire signal output voltage: approx. 45 mA |
| Ingress protection | IP 65 |
| Installation position | any |
| Weight | min. 160 g (depending on mechanical connection) |
| CE-conformity | EMC Directive: 2014/30/EU Pressure Equipment Directive: 97/23/EC (module A) ⁵ |

⁵ This directive is only valid for devices with maximum permissible overpressure > 200 bar


Wiring diagrams

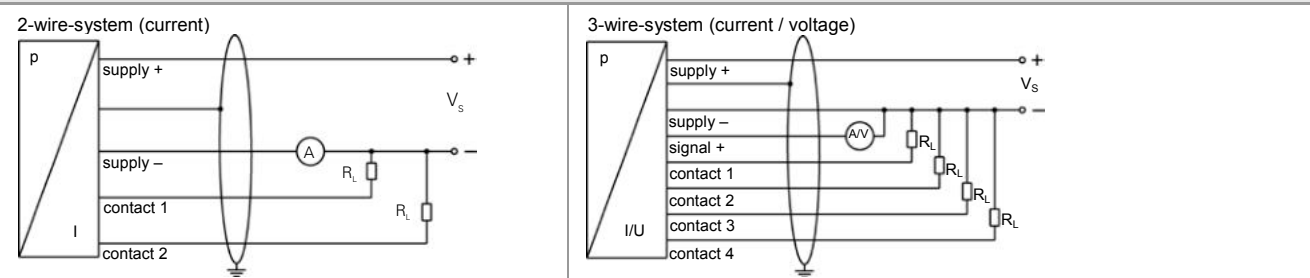

Pin configuration

| Electrical connection | M12x1 plastic (5-pin) | M12x1 metal (5-pin) | M12x1 plastic (8-pin) | ISO 4400 | Binder series 723 (5-pin) | cable colours (DIN 47100) |
|------------------------|-----------------------|----------------------------|-----------------------|----------------|----------------------------|---------------------------|
| Supply + | 1 | 1 | 1 | 1 | 1 | wh (white) |
| Supply - | 3 | 3 | 3 | 2 | 3 | bn (brown) |
| Signal + (only 3-wire) | 2 | 2 | 2 | 3 | 2 | gn (green) |
| Contact 1 | 4 | 4 | 4 | 3 | 4 | gy (grey) |
| Contact 2 | 5 | 5 | 5 | - | 5 | pk (pink) |
| Contact 3 | - | - | 6 | - | - | bu (blue) |
| Contact 4 | - | - | 7 | - | - | rd (red) |
| Shield | via pressure port | plug housing/pressure port | via pressure port | ground contact | plug housing/pressure port | ye/gn (yellow/green) |

Electrical connections (dimensions in mm)



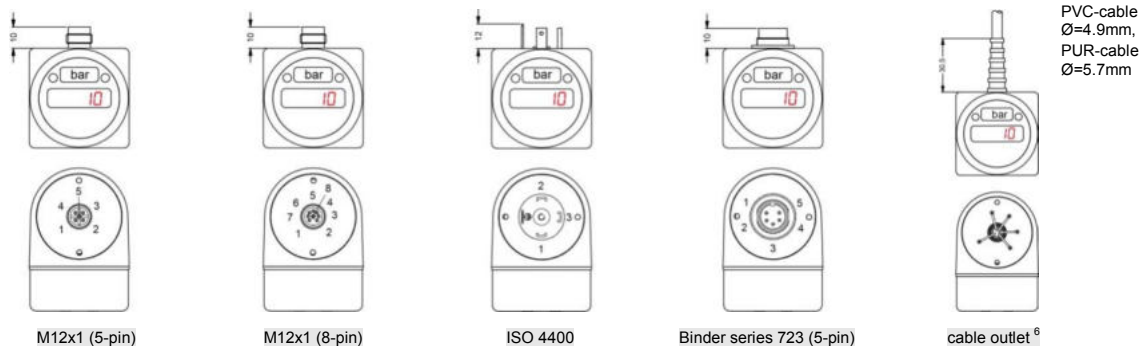


⁶ different cable types and lengths available, permissible temperature depends on kind of cable; standard: 2 m PVC cable (without ventilation tube, permissible temperature: -5 ... 70 °C)

Mechanical connections (dimensions in mm)

standard

option

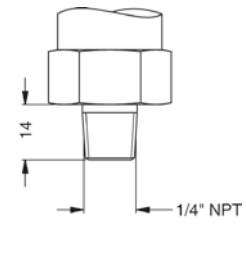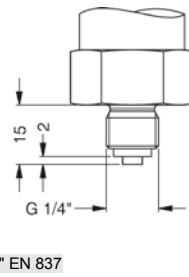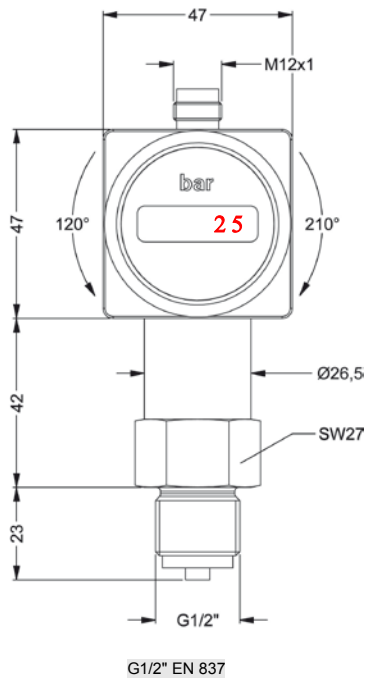

⇨ **metric threads and other versions on request**

