



# ILV 3

## Charge Amplifier for Piezoelectric Pressure Sensors




### Special characteristics

- Digital charge amplifier for piezoelectric sensors
- Measuring range freely selectable
- Signal output  $\pm 10V$
- Ethernet system interface
- Compact, robust design




Technical Data		
Charge inputs		1
Measuring range	[pC]	$\pm 50 \dots \pm 600\,000$
Calibrated measuring ranges	[% F <sub>nom</sub> ]	100
Signal output, analogue		
Output voltage	[V]	$-10 \dots +10$
Output voltage limiting	[V]	$\pm 11.5$
Max. output current, short-circuit resistant	[mA]	10
Output resistance	[ $\Omega$ ]	$< 5$
Interference suppression between input and output (GND) (0 ... 1000 Hz)	[dB]	$> 60$
Output interference signal (0.1 Hz ... 1 MHz); peak-to-peak; over the full measuring range $\pm 50 \dots \pm 600\,000$ pC up to 30 kHz filter frequency	[mV]	$< 30$
Time from switch-on to stable output values	[ms]	375
Measurement accuracy		
Accuracy class (at 25 °C)	[%]	$< \pm 0.5$
Repeatability (at 25 °C)	[%FS]	$< \pm 0.05$
Reset/Measure (operate) step	[pC]	$< \pm 2$ (typ. $< 1$ )
Drift (at 20°C)	[pC/s]	$< \pm 0.05$
Frequency response of the analogue signal output		
Bandwidth (–3dB)		
measuring range 50 pC up to 32.000 pC	[kHz]	30
measuring range 32.000 pC up to 40.000 pC	[kHz]	24
measuring range 40.000 pC up to 60.000 pC	[kHz]	16
measuring range 60.000 pC up to 80.000 pC	[kHz]	12
measuring range 80.000 pC up to 100.000 pC	[kHz]	9.6
measuring range 100.000 pC up to 120.000 pC	[kHz]	8
measuring range 120.000 pC up to 180.000 pC	[kHz]	5.3
measuring range 180.000 pC up to 250.000 pC	[kHz]	3.8
measuring range 250.000 pC up to 400.000 pC	[kHz]	2.4
measuring range 400.000 pC up to 600.000 pC	[kHz]	1.6
Low-pass filter, up to 20 kHz selectable	[Hz]	1 ... 20000; 30000
Filter characteristics		Bessel, 5 <sup>th</sup> order
High-pass filter, selectable	[Hz]	0.15; 1.5; Off


<b>Offset</b>		
Output voltage offset	[V]	± 10
Resolution	[mV]	10
<b>Signal output, digital</b>		
Resolution	[Bit]	12
Accuracy	[%FS]	< ± 1
Sampling rate for peak value acquisition	[kHz]	10
<b>Control signals (electrically isolated)</b>		
Input voltage range		
High	[V]	12 ... 30
Low	[V]	0 ... 5
Input current	[mA]	4 (at 24 V)
<b>LED displays</b>		
IP address not configured		Flashing green–blue
Connection via Ethernet		Constant blue
Measuring		Constant green
Reset		Constant red
Overload		Flashing red–blue
SensorTeach function in the range of 600000 pC		Flashing yellow, 1 Hz
SensorTeach function in the range of 6000 pC		Flashing yellow, 2 Hz
Ready for firmware update		Flashing white, 2 Hz
Bootloader mode		Flashing red, 1 Hz
<b>Connections</b>		
System input/output		M12 plug, pin-compatible with CMA amplifier, 8 pins
Ethernet		M12 socket, 4 pins, with protective cap
Digital input/output		M12 socket, 5 pins, with protective cap
Sensor input		BNC socket
<b>Ethernet communication interface</b>		
System interface for parameterizing the amplifier and transmitting measured values at max. 1 kHz transmission rate		
Transmission protocol	[Mbit/s]	TCP/IP, can be networked per IEEE802
Transfer rate, max	[Mbit/s]	10
Topology (twisted pairs)		2
Connecting socket		M12, socket with protective cap
Cable type		UTP category 5 or shielded twisted pair (STP)
<b>Digital control signals</b>		
System input/output		Voltage supply; Reset/Measure; SensorTeach; Analog output signal
Ethernet input		PC/PLC connection, measured–value streaming
<b>Digital input</b>		
Number		1
Response time	[ms]	0.1
Active input level selectable (High/Low)	[V]	0 or 24
Input voltage range	[V]	0...30
<b>Switching voltages</b>		
Logic high level	[V]	12...30
Logic low level	[V]	0...5
Input current at 24 V, typ	[mA]	4
Reserve polarity protection	[V]	-30...0
Electrical isolation from supply and output Isolation voltage, functional, typ.	[V <sub>DC</sub> ]	100
Latency periods of the electronic digital input.	[ms]	2
<b>Digital output</b>		
Number		2
Switching actions, any combination individually selectable for each output		Limit value switch 1 or 2, overload, manual, system failure, parameter changeover
Response time	[ms]	0.1
Active voltage level selectable for each output (High/Low)	[V]	0 or 24
Output voltage (equal to supply voltage), nom.	[V]	24
Voltage drop with load, max.	[V]	1
Output current at operating temperature	[mA]	350
Short-circuit current, typ.	[A]	0.7
Short-circuit period		Unlimited
Electrical isolation from supply and bus potential isolation, functional, typ.	[V <sub>DC</sub> ]	100
Latency times of the electronic digital outputs	[ms]	2

General data					
Supply voltage				24 (18...30)	
Overvoltage and reverse polarity protection	[V <sub>DC</sub> ]				
Isolation voltage, functional, typ.	[V <sub>DC</sub> ]			100	
Supply current (24 V)	[mA]			120	
Vibration resistance				100	
20...2000 Hz; Duration 16 min; Cycle 2 min.	[m/s <sup>2</sup> ]				
Impact; Duration 1 ms	[m/s <sup>2</sup> ]			2000	
Nominal (rated) temperature range (non-condensing)	[°C]			0...60	
Operating temperature range (non-condensing)	[°C]			-40...+80	
Relative humidity (maximum) (non-condensing)	[%]			93, at +40C° ± 2C°	
Dimension (L x W x H)	[mm]			115 x 64 x 35	
Weight	[g]			350	
Housing material				Die-cast aluminium	
Degree of protection, with connected cable or with protective caps				IP60	
EMC conformance					
According to EN61326-1: 2007, EN61326-2-3: 2007		In an industrial environment			
Pin assignment					
Connector plug, system input/output					
Pin No	Signal name	Description	Value	Colour code KAB 168...	
1	ground supply	-	-	wh (white)	
2	not assigned	not assigned	-	bn (brown)	
3	reset	active high	+ 12... +30 V	gn (green)	
4	not assigned	not assigned	-	ye (yellow)	
5	output +	output signal	± 10 V	gy (grey)	
6	output -	output signal ground	-	pk (pink)	
7	not assigned	not assigned	-	bl (blue)	
8	voltage supply	voltage supply between pin 8 and 1	+18 ... +30V	rd (red)	
Ethernet connecting socket					
Pin no.	Signal name				
1	TX +				
2	RX +				
3	TX -				
4	RX -				
Connector plug, digital input / output					
Pin no.	Signal name	Description	Value		
1	VCC	input or output	VCC / 350 mA		
2	digital out	supply for output 1, 2	+18... +30 V		
3	digital out	digital output 2	VCC / 350 mA		
4	digital in	digital input 1	+12... +30 V		
5	ground supply	-	-		

### Block diagram

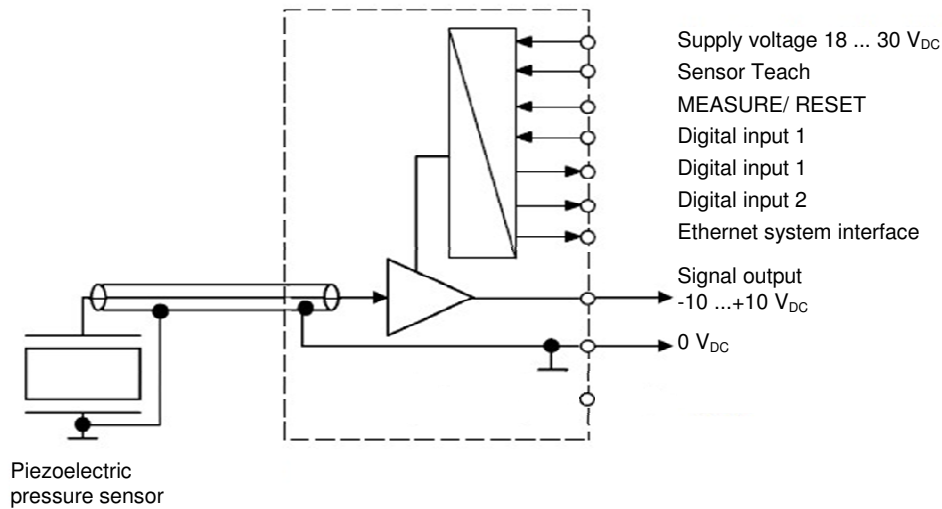

### Dimensions (mm)

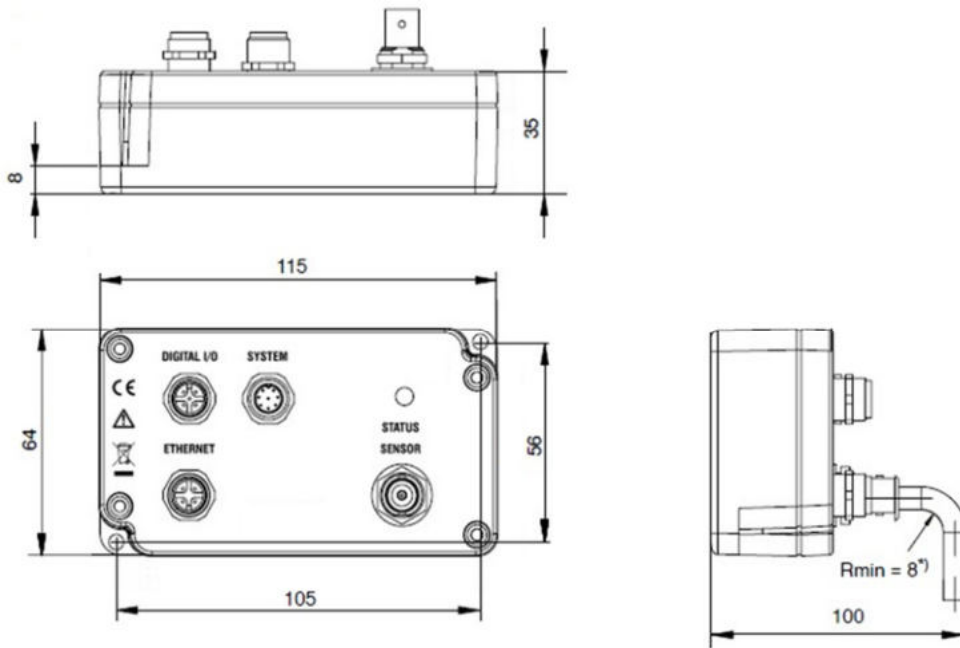

\* 4 x cable diameter

### Accessories (not included in scope of supply)

Name	Length	BDS-order number
Ethernet cable	2 m	BDV4650
Lumberg system cable	10 m	BDV4631