

Connection parts with nominal width DN 6 Valves, coupling valves, protection caps, fittings, adapters and connections for analytic instruments

Applications

- Handing at SF₆ gas tanks
- For indoor and outdoor equipment

Special features

- The valves can be disconnected or coupled under pressure or vacuum
- Vacuum and pressure-tight (-1 ... +64 bar)
- Working temperature -40 ... +80 °C
- Leak rate: GCV, GCA,

measuring chambers: $\leq 1 \cdot 10^{-8} \text{ mbar} \cdot \text{I/s}$ GCG: $\leq 1 \cdot 10^{-5} \text{ mbar} \cdot \text{I/s}$

■ Tested helium tightness of 100 %



Connection parts with nominal width DN 6

Description

Safe and simple operation

WIKA's connection parts enables the secure storage and handling of environmentally hazardous SF_6 greenhouse gas in the equipment provided for this. The connecting parts have been precisely and specifically optimised for this application.

The ease of mounting and removal, as well as being 100 % tested for leak tightness, make these connecting parts safe and reliable interfaces for the filling and maintenance of the equipment.

Highest quality

In order to meet the high demands for quality, the robust design has passed extensive testing with actuation tests, tests in atmospheric conditions and shock tests. The connecting parts are manufactured from high-quality aluminium, brass and stainless steel. On request, the connecting parts can be supplied with a material certificate.


Comprehensive product range

The product range for connection parts with nominal width DN 6 consists of self-closing valves, matching couplings and soldered and weld-in connections. For the connection of DN 6 to other nominal widths and connections, the appropriate adapters and components are available. A protection cap offers mechanical protection and additional sealing.

By using WIKA connection parts, the maintenance-free and reliable separation of SF_6 gas compartments from the environment is made possible. In this way, not only is the escape of SF_6 gas prevented, but also the ingress of moisture.

Valve, model GCV-06


Attachment parts, left (M24 x 1.5)










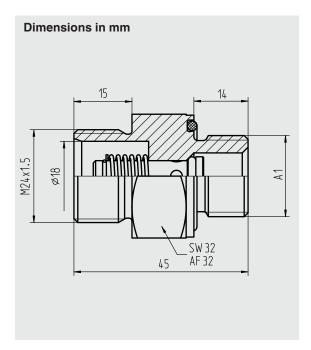



Material	Order no.
Aluminium	13422502
Aluminium	13376498
Stainless steel	13360281
	Aluminium Aluminium





Coupling valve, model GCC-06

Attachment parts, left (M24 x 1.5)








Attachment parts, right (M24 x 1.5)



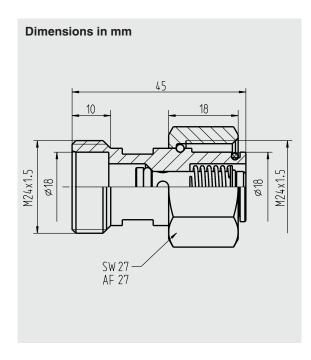

Material	Order no.
Aluminium	13376528

Connection for analytic instruments, model GCG-06


Attachment parts, left

Attachment parts, right (M24 x 1.5)







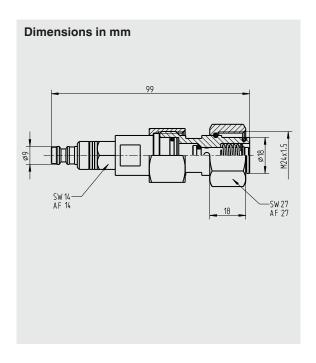

Material	Order no.
Aluminium, brass, stainless steel	14091750


Adapter, model GCA-06

Nominal width adapter DN 6 to DN 8



Measuring instrument adapter DN 6 to G $1\!\!/_{\!\!4}$



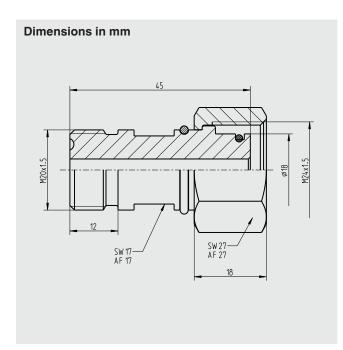

Dimensions in mm
W IKA Dichtung W IKA sealing SW 27 AF 27 18

Material	Order no.
Material	Order no.
Brass stainless steel	14091765

Material	Order no.
Aluminium	13370643


The O-ring is included. Spare part: O-ring D14 Order no.: 14007857

Fitting, model GCF-06

Protection cap, model GCP-06





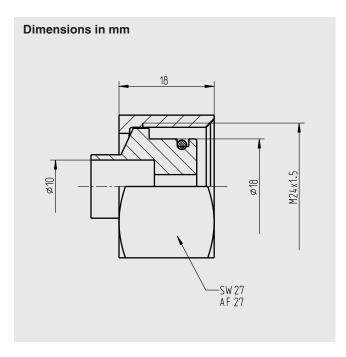

Dimensions in mm
SW 27 AF 27

Material	Order no.
Stainless steel	13428781

Material Order no.
Aluminium 13376528

The O-ring is included. Spare part: O-ring D14 Order no.: 14007857