

IPA 440



Field Display for current loop with Contacts

Functional range

- ▶ free scalable display
- ▶ switch mode, hysteresis, parameterizable deceleration of the contacts
- ▶ no external power supply necessary

Product characteristics

- ▶ field display for pressure transmitter with output signal: 4 ... 20 mA / 2-wire or 0 ... 10 V / 3-wire
- ▶ 4-digit LCD display
- ▶ plastic housing
- ▶ pressure compensation element with PTFE-Filter


Optional versions

- ▶ IS-version
- ▶ 2 contacts
- ▶ 4-digit LED display

Typical application



in situ display at pumping stations

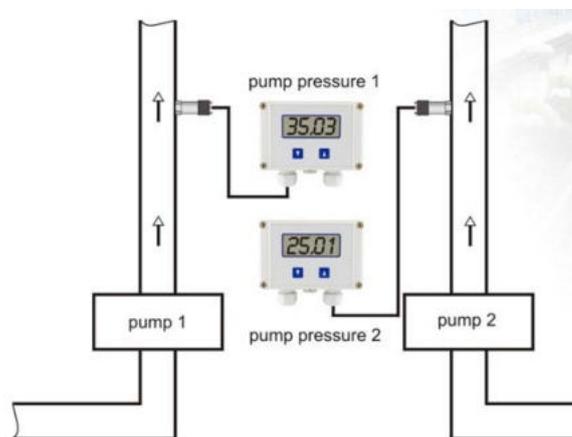

Ordering code IPA 440

IPA 440



Standard version		8	5	1																
Analogue output		4 ... 20 mA / 2-wire		1																
		Intrinsic safety for zone 1 / 4 ... 20 mA / 2-wire		E																
		customer		9																consult
Contact		without contact		0																
		2 contacts ¹		2																
Unit		without ²		0																
		bar		1																
		mbar		2																
		mH ₂ O		3																
		%		P																
		mA		A																
		customer		9																consult
Label on display		standard						1												
		neutral						N												
		customer						9												consult
Display		LC display								C										
		LED display								D										
Housing material		plastic ABS												G						
Special version		standard									0	0	0							
		overvoltage protection ³									1	0	1							
		customer									9	9	9							consult

¹ only possible in combination with LED display

² the unit signs are loose-settled

³ not possible for Ex-version