

IDPT 100

Differential Pressure Transmitter for Process Industry

accuracy according to IEC 60770:
0.1 % FSO

Differential pressure

from 10 mbar up to 20 bar

static pressure

max. 400 bar

Output signal

2-wire: 4 ... 20 mA

RS485 with Modbus RTU protocol

Special characteristics

- ▶ compact design
- ▶ fast response time
- ▶ aluminium die cast case
- ▶ zero adjustment via switch

Optional versions

- ▶ several process connections

The differential pressure transmitter IDPT 100 has been especially designed for fast test processes in leakage and flow measurement, where a fast response time and high sampling rate are necessary.

The compact design of the IDPT 100 facilitates the use in standardised applications, e. g., and the installation in 19" Rack.

The IDPT 100 with optionally RS485 interface uses the communication protocol Modbus RTU which has found the way in industrial communication as an open protocol. The Modbus protocol is based on a master Slave architecture with which up to 247 Slaves can be questioned by a master – the data will transfer in binary form.

Preferred areas of use are

test engineering / leak testing



machine and plant engineering



environmental technology



energy production



Differential pressure ranges						
sensor	Type	A	B	C	D	E
pressure range P_N diff.		10 mbar	60 mbar	400 mbar	2.5 bar	20 bar
pressure range P_N symmetric (diff.)		± 10 mbar	± 60 mbar	± 400 mbar		
Permissible static pressure		70 bar	400 bar	400 bar	400 bar	400 bar

Output signal / Supply	
Standard	2 wire : 4 ... 20 mA / $V_S = 12 \dots 32 V_{DC}$
Option	Digital: RS 485 with Modbus RTU protocol / $V_S = 9 \dots 32 V_{DC}$

Performance					
Accuracy ¹	$P_N \geq 60$ mbar: $\leq \pm 0.1$ % FSO $P_N < 60$ mbar: $\leq \pm 0.2$ % FSO				
Permissible load	$R_{max} = [(U_B - U_{B min}) / 0,02 A] \Omega$				
Influence supply	supply: 0.05 % FSO / 10 V load: 0.05 % FSO / k Ω				
Influence static pressure P_N [Pa/100 bar]	10 mbar 18	60 mbar 30	400 mbar 40	2,5 bar 250	20 bar 2000
Influence installation position	max. 400 Pa (can be compensated about zero-point correction) If pressure is under 60 mbar the order has to be in mounted position.				
Long term stability	$P_N \geq 60$ mbar: $\leq \pm 0.05$ %FSO/ year at reference conditions $P_N < 60$ mbar: $\leq \pm 0.15$ %FSO/ year at reference conditions				
Sampling rate	250 Hz				
Turn-on time	ca. 260 msec				
Response time (10 ... 90 %)	10 ms				

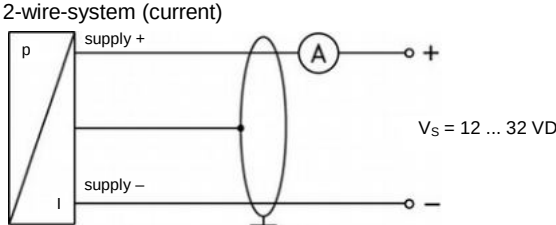
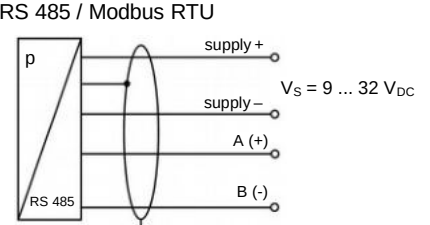
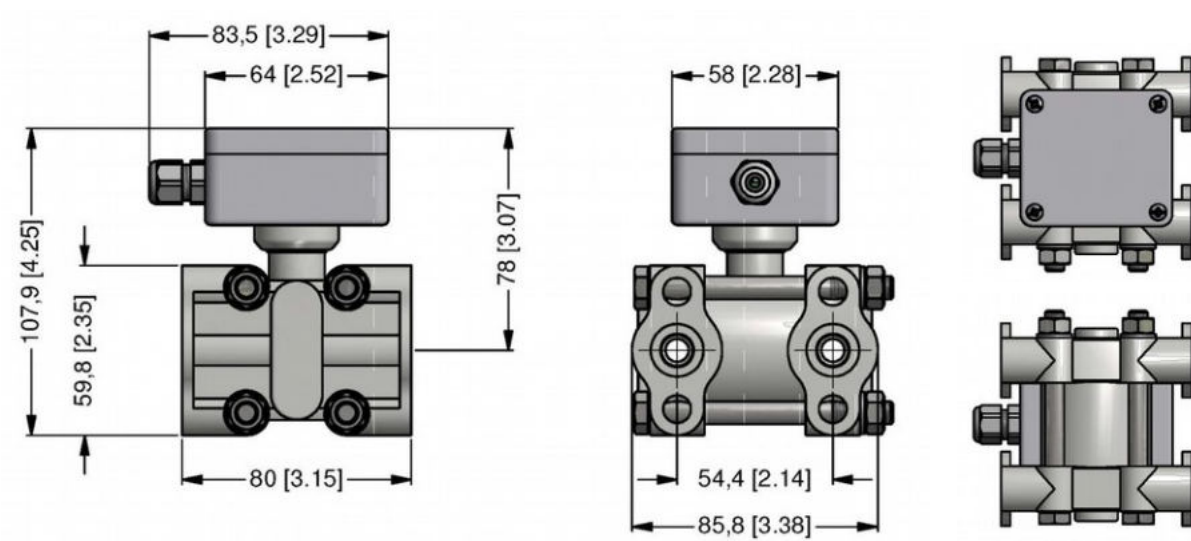
¹ accuracy according to IEC 60770 – limit point adjustment (non-linearity, hysteresis, repeatability)

Thermal effects (Offset and Span)	
Thermal error (offset and span)	$\leq \pm 0.1$ % FSO / 10 K
Compensated range	-20 ... 80 °C
Permissible temperatures	medium: -25 ... 85°C electronics / environment: -25 ... 85°C storage: -25 ... 85°C

Electrical protection	
Short-circuit protection	permanent
Reverse polarity protection	no damage, but also no function
Electromagnetic compatibility	emission and immunity according to EN 61326

Mechanical stability	
One-sided overload	According to the maximum static pressure of differential pressure sensor
Vibration	5 g RMS (25 ... 2000 Hz) according to DIN EN 60068-2-6
Shock	100 g / 1 ms according to DIN EN 60068-2-27

Materials							
Pressure port / flange	<table border="0"> <tr> <td style="padding-right: 10px;">standard</td> <td>stainless steel 304 / 1.4301</td> <td></td> </tr> <tr> <td style="padding-right: 10px;">option</td> <td>stainless steel 316 / 1.4401</td> <td style="text-align: right;">others: on request</td> </tr> </table>	standard	stainless steel 304 / 1.4301		option	stainless steel 316 / 1.4401	others: on request
standard	stainless steel 304 / 1.4301						
option	stainless steel 316 / 1.4401	others: on request					
Diaphragm	<table border="0"> <tr> <td style="padding-right: 10px;">standard</td> <td>stainless steel 316L / 1.4404</td> <td style="text-align: right;">others: on request</td> </tr> </table>	standard	stainless steel 316L / 1.4404	others: on request			
standard	stainless steel 316L / 1.4404	others: on request					
Vent and dump valves Blanking plugs	<table border="0"> <tr> <td style="padding-right: 10px;">standard</td> <td>stainless steel 304 / 1.4301</td> <td></td> </tr> <tr> <td style="padding-right: 10px;">option</td> <td>stainless steel 316 / 1.4401</td> <td></td> </tr> </table>	standard	stainless steel 304 / 1.4301		option	stainless steel 316 / 1.4401	
standard	stainless steel 304 / 1.4301						
option	stainless steel 316 / 1.4401						
Bolts and nuts	<table border="0"> <tr> <td style="padding-right: 10px;">standard</td> <td>stainless steel 304 / 1.4301</td> <td></td> </tr> <tr> <td style="padding-right: 10px;">option</td> <td>stainless steel 316 / 1.4401</td> <td style="text-align: right;">others: on request</td> </tr> </table>	standard	stainless steel 304 / 1.4301		option	stainless steel 316 / 1.4401	others: on request
standard	stainless steel 304 / 1.4301						
option	stainless steel 316 / 1.4401	others: on request					
Housing	aluminum die cast with epoxy painting (grey) others: on request						
Cable gland	polyamid						
Seals (media wetted)	<table border="0"> <tr> <td style="padding-right: 10px;">standard</td> <td>FKM</td> <td></td> </tr> <tr> <td style="padding-right: 10px;">option</td> <td>EPDM, NBR</td> <td style="text-align: right;">others: on request</td> </tr> </table>	standard	FKM		option	EPDM, NBR	others: on request
standard	FKM						
option	EPDM, NBR	others: on request					
Filling fluids	Silicone oil others: on request						
Media wetted parts	pressure port, seal of pressure port, diaphragm						

Miscellaneous					
Mounting bracket (optionally)	material C-steel or stainless steel 304 / 1.4401 weight 0,45 kg (incl. bolts and nuts)				
Ingress protection	IP 66 / IP 67				
Installation position	Any ²				
Weight	approx. 1800 g				
Current consumption	approx. 23 mA				
CE-conformity	EMC Directive: 2014/30/EU		Pressure Equipment Directive: 2014/68/EU (module A) ³		
² Pressure transmitters are calibrated in a vertical position with the pressure connection down. If this position is changed on installation there can be slight deviations in the zero point. Press the switch for zero adjustment (see operating manual).					
³ This directive is only valid for devices with maximum permissible overpressure > 200 bar.					
Connections					
Electrical connection	terminal clamps in clamping chamber (for cable-Ø max.2.5 mm ²)				
Process connections	internal thread 1/4" - 18 NPT / fixing 7/16 UNF internal thread 1/4" - 18 NPT / fixing M10 others: on request				
Standard option					
Wiring diagram					
2-wire-system (current)			RS 485 / Modbus RTU		
					
Pin configuration					
2 wire system			RS 485 / Modbus RTU		
Electrical connection	Terminal clamps	M12x1/metal (4-pin)	Electrical connection	Terminal clamps	
Supply + Supply -	+ Ub - Ub	1 3	Supply + Supply - A (+) B (-)	+ Ub - Ub A B	
Ground	⊥	Plug housing	Ground	⊥	
Dimensions (mm / in)					
					

Ordering code IDPT 100

IDPT 100

□□□-□□□□-□-□-□-□□□-□□□-□-□□-□□-□□-□□□

Pressure		
differential pressure	3 4 5	
Input		
10 mbar	0 1 0 0	
60 mbar	0 6 0 0	
100 mbar	1 0 0 0	
400 mbar	4 0 0 0	
2.500 mbar	2 5 0 1	
20 bar	2 0 0 2	
customer	9 9 9 9	consult
Output		
4 ... 20 mA / 2-wire		1
Modbus RTU		L5
customer		9
		consult
Accuracy		
P _N ≥ 60 mbar:	0,1 % FSO	1
P _N < 60 mbar:	0,2 % FSO	B
customer		9
		consult
Housing		
Aluminium		L
customer		9
		consult
Electrical connection		
terminals / cable gland M12x1.5		A K 2
Male plug M12x1 (4-pin) / metal		M 1 7
customer		9 9 9
		consult
Process connection		
1/4" - 18 NPT F / fixing 7/16 UNF		N 2 0
1/4" - 18 NPT (F / vertical) / fixing 7/16 UNF		N 2 1
1/4" - 18 NPT F / fixing M10		N 3 0
1/4" - 18 NPT (F / vertical) / fixing M10		N 3 1
customer		9 9 9
		consult
Valve		
without		0
with vent		1
with vent (top)		2
with vent (bottom)		3
Material flange, valves, screws, ...		
stainless steel 1.4301 (304 SS)		0 2
stainless steel 1.4401 (316 SS)		1 2
customer		9 9
		consult
Diaphragm / filling fluid		
stainless steel 1.4435 (316L) / silicone oil		1 1
customer		9 9
		consult
Seals		
FKM		1
EPDM		3
NBR		5
PTFE		4
customer		9
		consult
Special version		
standard		0 0 0
customer		9 9 9
		consult