

IAMx-x – metal built-on enclosure for devices of the M-line – for customized applications

- Aluminium, black, powder-coated
- Protection class IP65
- Fixing flanges on the back side
- Connection: 2 high-strength cable glands on the lower side

• **Type IAM1-1**

for one M2-device in 96x48mm Dimensions:
176x144x82mm (HxBxD)

• **Type IAM2-1**

for one M3-, PU5 or PZ5-device in 96x48mm
Dimensions: 226x144x82mm (HxBxD)

• **Type IAM2-2**

for two M2-devices in 96x48mm Dimensions:
226x144x82mm (HxBxD)

• **Type IAM2-3**

for three M1-devices in 96x48mm
Dimensions: 226x144x82mm (HxBxD)

ORDER NUMBER

EUR

IAM1-1-M2

on request

IAM2-1-M3 (PU)

on request

IAM2-2-M2


on request

IAM2-3-M1

on request



• Dimensioning drawing

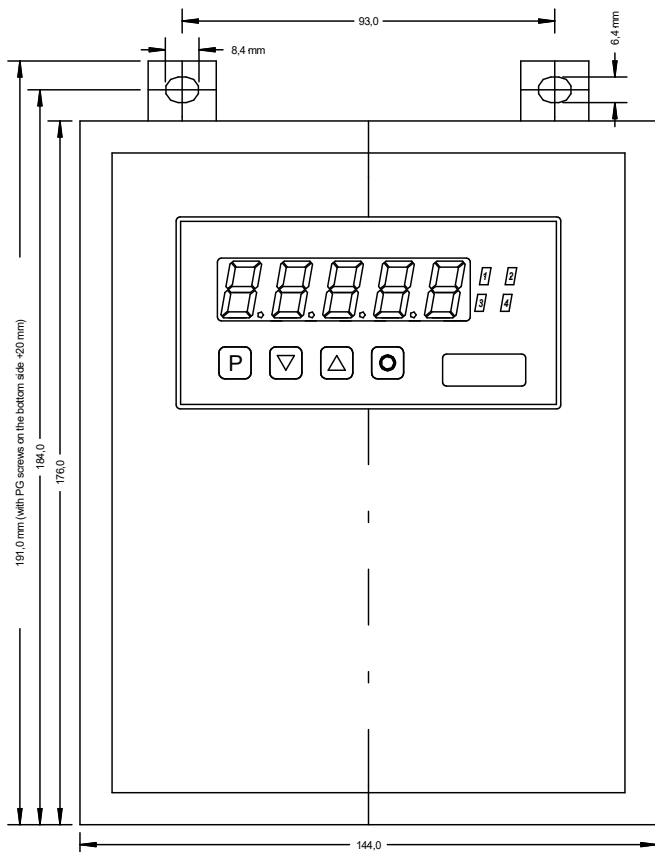


Housing for display IAM1-1-M2

Dimensions H 176 x B 144 x D 82 mm

Rear wall, hanging

Connection via high-strength cable glands, internal plug-in terminal

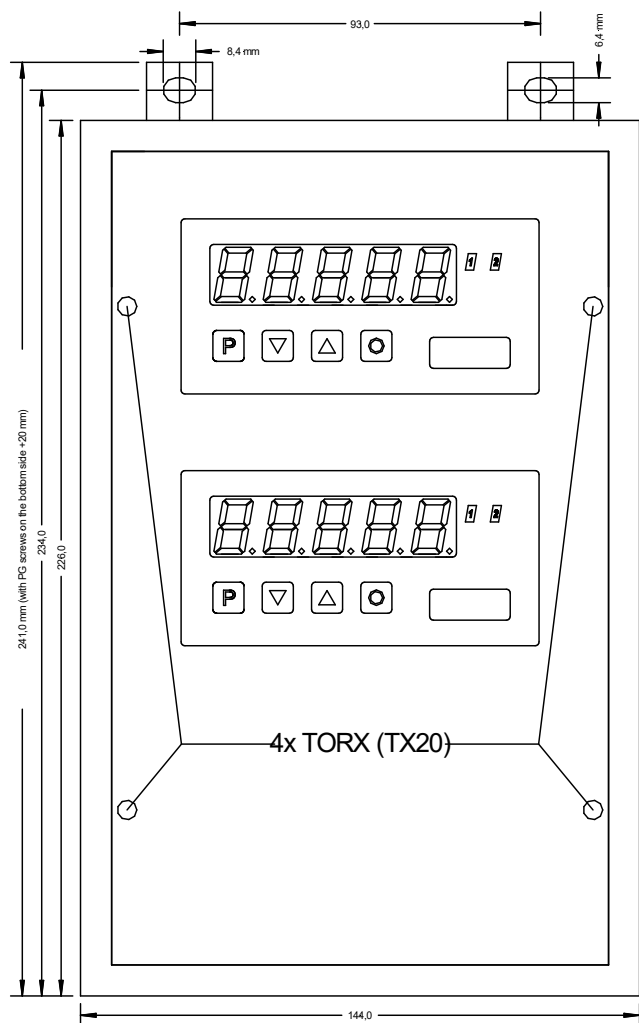

Metal built-on enclosure

Type IAM2-2-M2

Housing for 2x M2-1.. devices in wall-mounting

Dimensions H 226 x B 144 x D 82mm

Rear wall, hanging

Connection via high-strength cable glands, internal screw terminal

For connection of the display and for opening of the front, the 4 TORX screws (TX20) need to be loosen!