

IAK1 – plastic built-on enclosure for panel devices of the M1-line in 96x48 mm

Housing

- Material: ASA 757G Luran S
- Colour: black
- Dimensions (total): 160x90x40.55 mm (BxHxD)
- Working temperature: -40°...+80°C
- Inflammability: UL94 HB
- Dielectric strength: 26 kV/mm
- Surface resistance 1E13 Ω
- Ignition temperature: >400°C
- Weight: approx. 300 g


Protection class

- Sealing: IP65, PU flexible foam, -40°...+100°C
- Protective insulation: all insulation according to VDE100

Connection


- Connection: via high-strength cable gland
- Cut-out: for 96x48 panel meters

Dimensions

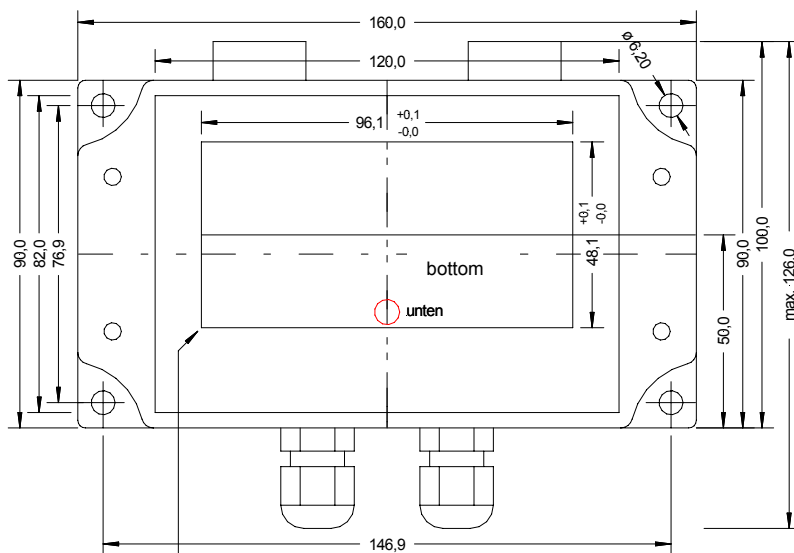

Dimensions front side

Refinish the radius in the corners square

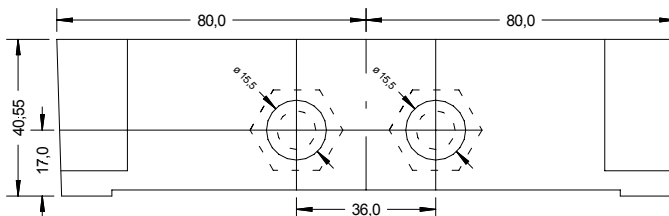

Dimensions rear side



ORDER NUMBER

EUR

IAK1-1

120,00

(incl. assembly of the housing)