

# IM1 – 4-digit digital panel meter in 48x24 mm (BxH)


## Standard signals 0/4-20 mA, 0-10 VDC; optional 50 VDC, 100 VDC

- red display of -1999...9999 digits (optional green, orange or blue display)
- minimal installation depth: 27 mm without plug-in terminal
- adjustment via factory default or directly on the sensor signal
- min/max-value recording
- 10 adjustable supporting points
- display flashing at threshold exceedance / undercut
- navigation keys for the recall of min/max values or for limit value corrections during operation
- tara-function
- programming interlock via access code
- protection class IP65 at the front
- plug-in terminal
- accessories: pc-based configuration-kit PM-TOOL with CD & USB adapter
- on request: devices for working temperatures of -40°C...+70°C



**ORDERING NUMBER**      **EUR**  
(without options)

### • Direct voltage, direct current

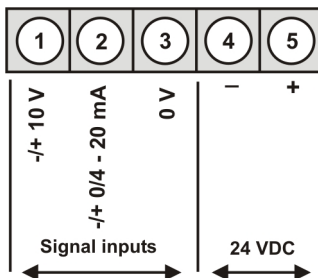

Supply 24 VDC

**IM1-7VR4A.0001.770xD**      **125,00**

### • Product key options

IM	1-	7	V	R	4	A.	0	0	0	1.	7	7	0	x	D	EUR	
																S100 up to 100 VDC, measuring fault 0.5% of final value	45,00
																S260 up to 50 VDC, measuring fault 0.5% of final value	15,00
															1	Without keypad, operation via PC software PM-TOOL	10,00
															B	Blue	33,00
															G	Green	9,50
															Y	Orange	3,00

State physical unit in order, e.g. °F.

### • Parameterisation software


PC based configuration software PM-Tool for devices without keypad, for a simple adjustment of standard devices, incl. CD & USB-adapter. Programming happens via an interface on the back.

**PM-TOOL-MUSB4**      **89,00**

• **Technical data**

<b>Dimension</b>	Housing	B48xH24xD27 mm (including plug-in terminal D= 54 mm)	
	Panel cut-out	45.0 <sup>+0.8</sup> x 22.2 <sup>+0.6</sup> mm	
	Fixing	screw elements for insulation thickness up to 3 mm	
	Housing material	PC Polycarbonate, black	
	Sealing material	EPDM, 65 Shore, black	
	Protection class	at the front IP65 standard, back side IP00	
	Weight	approx. 100 g	
Connection	plug-in terminal; line cross-section up to 2.5 mm <sup>2</sup>		
<b>Display</b>	Display	4-digit	
	Digit height	10 mm	
	Segment colour	red (standard), optional available in green, blue and orange	
	Display range	-1999 to 9999	
	Setpoints	optical display flashing	
	Overflow	horizontal bars at the top	
	Underflow	horizontal bars at the bottom	
	Display time/ Measuring time	0.1 to 10.0 seconds	
<b>Measuring input</b>	Span	-12...12 V	/ -22...24 mA
	Measuring range	0-10 V	/ 0/4-20 mA
	Input resistance	Ri at ~200 kΩ	/ Ri at ~100 Ω
	Measuring fault	0.1% of measuring range, ± 1 Digit / 0.1% of measuring range, ± 1 Digit	
	Temperature drift	100 ppm/K	
	Measuring time	0.1 ... 10.0 seconds	
	Measuring principle	U/F-conversion	
	Resolution	approx. 18 Bit at 1 sec measuring time	
<b>Power pack</b>	Supply	24 VDC ±10%, galvanic isolated (max. 1 VA)	
<b>Memory</b>	EEPROM	Data life ≥ 100 years at 25°C	
<b>Ambient conditions</b>	Working temperature	0 to +60°C	
	Storing temperature	-20 to +80°C	
	Climatic density	relative humidity 0-85% on years average without dew	
<b>CE-sign</b>	conformity to directive 2014/30/EU		
<b>EMV</b>	EN 61326, EN 55011		
<b>Safety standard</b>	according to low voltage directive 2014/35/EU, EN 61010; EN 60664-1		

**Housing:**

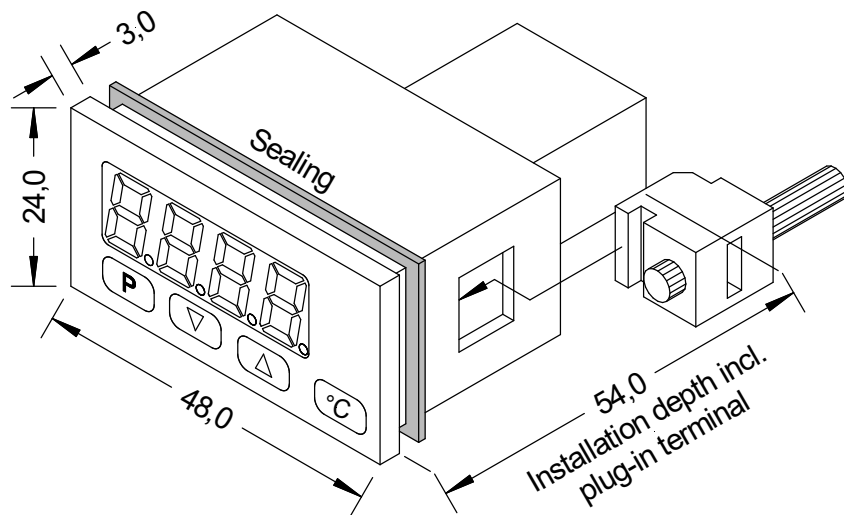

• Order key

	IM	1-	7	V	R	4	A.	0	0	0	1.	7	7	0	x	D	
<b>Basic type M-Line</b>																	<input type="checkbox"/> S100 Measuring input 100 VDC <input type="checkbox"/> S260 Measuring input 50 VDC
<b>Installation depth</b> 54 mm incl. plug-in terminal																	<b>Dimension</b> <input type="checkbox"/> D physical unit
<b>Housing size</b> 48x24x27 mm (BxHxD)																	<b>Version</b> <input type="checkbox"/> x internal version
<b>Display type</b> V, A																	<b>Switching points</b> <input type="checkbox"/> 0 no switching point
<b>Display colours</b> Blue Green Red Orange																	<b>Protection class</b> <input type="checkbox"/> 1 without keypad, operation via PM-TOOL <input type="checkbox"/> 7 IP65 / plug-in terminal
<b>Number of digits</b> 4-digit																	<b>Supply voltage</b> <input type="checkbox"/> 7 24 VDC galv. isolated
<b>Digit height</b> 10 mm																	<b>Measuring input</b> <input type="checkbox"/> 1 Direct current, direct voltage
<b>Digital input</b> without																	<b>Analog output</b> <input type="checkbox"/> 0 without
																	<b>Sensor supply</b> <input type="checkbox"/> 0 without