Hydraulic // 0...1400 bar

ICP700.T Basic

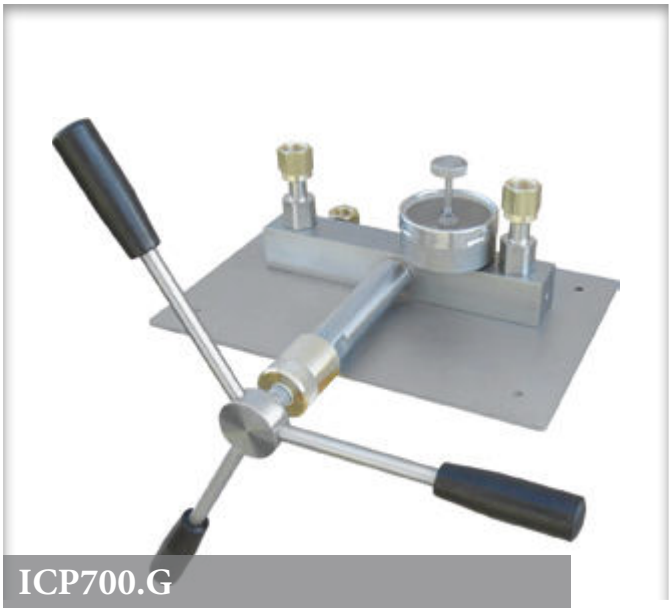

ICP700.G

Your advantages		
Type	**ICP700.T**	**ICP700.G2 / ICP700.G**
	• Simultaneous calibration of several test samples thanks to large tank volume • Fast pressure generation with low effort	• Oil-free pressure generation up to 1000 bar • Simple and fast pressure generation with smooth-running spindle

Technical data			
Type	**ICP700.T**	**ICP700.G2**	**ICP700.G**
Version	Lever pump	Spindle pump	
Pressure range	0...700 bar	0...700 bar	0...700 bar
Pressure medium	Hydraulic oil		Demineralized water
Connections			
Reference pressure gauge	G¼	G⅜ left, G¼, G½	
Test sample	G¼ with quick coupling and pressure hose (1 m)	G⅜ left, G¼, G⅜, G⅛	
Basic			
Dimensions	Approx. 500 x 110 x 160 mm	Approx. 340 x 225 x 130 mm	
Weight	Approx. 5.6 kg	Approx. 9.9 kg	
Solid			
Dimensions (case)	Approx. 575 x 470 x 230 mm	Approx. 450 x 370 x 150 mm	
Weight	Approx. 10.2 kg	Approx. 12.6 kg	
+ Adapter kit	Stainless steel, G⅛, G¼, G⅜, G½, ⅛ NPT, ¼ NPT, ½ NPT, M12 x 1.5, M20 x 1.5, G⅛, G¼		
+ Seal kit	PA flat gaskets and O-rings		

ICS Schneider Messtechnik GmbH
Briesestraße 59
D-16562 Hohen Neuendorf / OT Bergfelde

Tel.: 03303 / 504066
Fax: 03303 / 504068

info@ics-schneider.de
www.ics-schneider.de

Order code			
Type	**Version**		**Order number**
ICP700T	Lever pump	Basic Solid (incl. case and adapter)	EPPT700E000020 EPPT7000000020
ICP700.G2	Spindle pump	Basic Solid (incl. case and adapter)	E8PG700E000020 E8PG7000000020
ICP700.G		Basic Solid (incl. case and adapter)	E8PG700E000010 E8PG7000000010

ICS Schneider Messtechnik GmbH
Briesestraße 59
D-16562 Hohen Neuendorf / OT Bergfelde

Tel.: 03303 / 504066
Fax: 03303 / 504068

info@ics-schneider.de
www.ics-schneider.de