
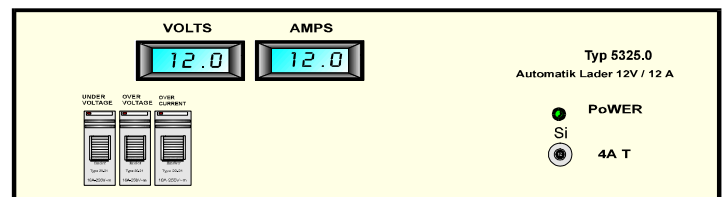
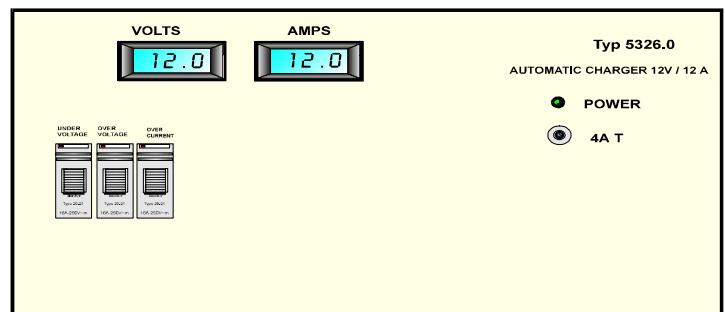



**equipment qualities**

- automaticel regulated load-current
- inverse-polarity protection
- with display
- message signal
- akku intern or extern

Typ: 5325.4 wall case

side

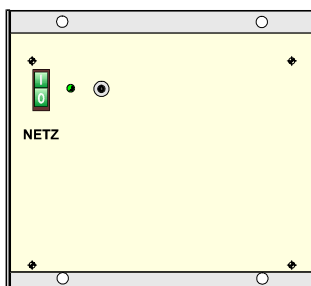

**technical parameter:**

specification	type	5325.0	5325.3	5325.4	5326.0	5326.1	5326.2	5326.3	5326.4	5017.0
DC nominal load voltage		12V	12V	48V	12V	24V	48V	48V	60V	24V
DC nominal load current		12A	12A	0,5A	12A	12A	6A	12A	12A	12A
DC load final voltage		13,8V	13,8V	55,2V	13,8V	27,6V	55,2V	55,2V	69V	27,6V
dimension WxHxD		3HE 84TE		280x250x186	3HE 84TE	3HE 84TE		6HE 84TE		3HE 42TE
low current switch		10,5 V			10,5 V	21 V	42 V	42V	52,5 V	10,5V
over voltage switch		14,5 V		58V	14,5 V	29 V	58 V	58V	72,5 V	not
output		clamps on back side		clamps intern	clamps on back side					H 15
display		LCD display		not	LCD display for voltage and current					LED
operating temperature		0 - 35°C								
max. relative humidity		80% by 35°C								
AC input voltage		230 V +/-10% 50Hz								
AC testing voltage		EN 61010 ; EN 61558-2-4								
safety class		I								
Accu		extern*	17Ah	6,5Ah	38Ah	extern*				
electromagnetic compatibility		EN 61000-6-3 ; EN 61000-6-2								
other		message signal, over voltage protected								

\* accu not included in delivery