
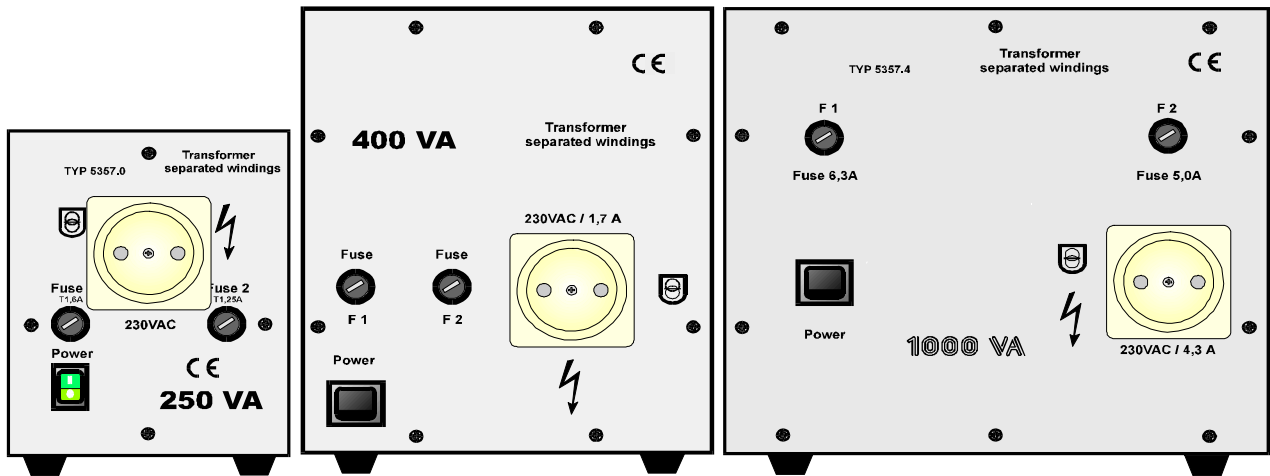


equipment qualities

- thermalmagnetic protective switches at front
- one phases transformer
- security primarily / secondarily
- galvanically separated

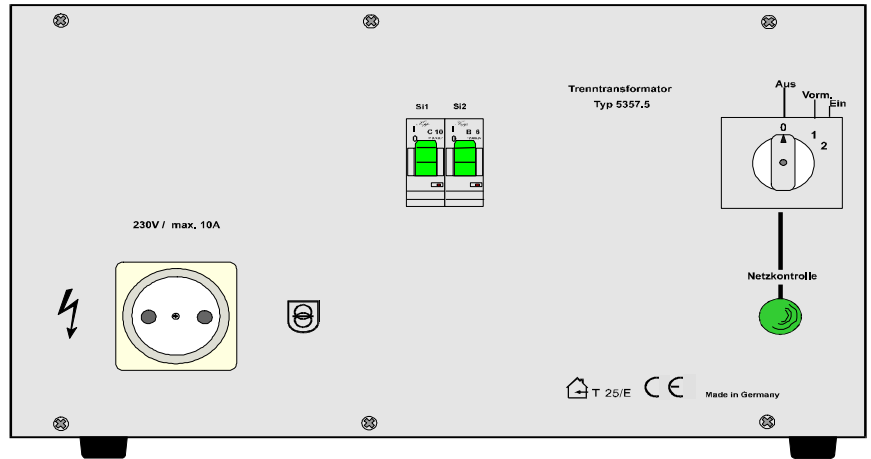

technical parameter:

spezifikation / type		5357.13	5357.23	5357.32	5357.42	5357.51
		galvanically separated transformer				
AC	output voltage	230VAC				
AC	output current	1,7A	2,6A	3,5A	4,4A	10A
AC	rated output power	250 VA	400 VA	600 VA	800 VA	1000 VA
	dimensions WxHxD mm	183x180x252		244x232x252		380x225x330
	weight	7 kg	11 kg	14 kg	17 kg	40 kg
AC	input voltage	115V 48Hz - 62Hz				
	display	lighted power switch				lamp
	safety class	I				
	color	front Alu eloxiert / korpus RAL 7035				
	degree of protection	IP 30				
	electric connections input	cable				
	electric connections output	power connector 2 pools				
AC	testing voltages	EN 61010 ; EN 61558-2-4				
	operating temperature	0 - 50°C				
	max.relative humidity	85% by 35°C				
	electromagnetic compatibility	EN 61000-6-3 ; EN 61000-6-2				

option

No.

- 5 AC input voltage 115V