

Pressure gauge per EN 837-1 with mounted diaphragm seal With flange connection, flush diaphragm Model DSS27M

WIKA data sheet DS 95.12

Applications

- For aggressive, highly viscous, crystallising or hot media
- Process industry
- Machine building and plant construction

Special features

- Flange with a flush welded diaphragm
- Robust, all welded design
- Universal application



Diaphragm seal system, model DSS27M

Description

Diaphragm seal systems are used to protect the pressure measuring instrument from aggressive, adhesive, crystallising, corrosive, highly viscous, environmentally hazardous or toxic media. The diaphragm made of stainless steel provides for the separation from the medium. The pressure is transmitted to the measuring instrument via the system fill fluid which is inside the diaphragm seal system.

The DSS27M with flange connection and flush diaphragm is available following currently used, international flange standards.

Mounting of the diaphragm seal to the measuring instrument is made via direct mounting as standard.

The DSS27M is particularly well suited for aggressive, highly viscous, crystallising or hot media. The measuring system is successfully used worldwide in the chemical process and petrochemical industries with high measuring requirements.


Specifications

Model DSS27M	
Design	Pressure gauge with Bourdon tube per EN 837-1, diaphragm seal with flange connection, flush diaphragm
Nominal size (NG)	100
Accuracy class	1.0
Pressure limitation	
Steady	Full scale value
Fluctuating	0.9 x full scale value
Short time	1.3 x full scale value
Permissible temperature range	
Medium	-10 ... 150 °C [14 ... 302 °F]
Ambient	10 ... 40 °C [50 ... 104 °F]
Storage	10 ... 60 °C [50 ... 140 °F]
Ingress protection	IP65 per IEC/EN 60529
Material	
wetted	Diaphragm: Stainless steel 1.4435 [316L] Diaphragm seal: Stainless steel 1.4404 [316L]
non-wetted	Dial, pointer: Aluminium Case: Stainless steel 1.4301 [304] Window: Laminated safety glass
Level of cleanliness of wetted parts	Oil and grease free per ASTM G93-03 level F and ISO 15001 (< 1,000 mg/m ²)
System fill fluid	Silicone oil KN 2 for general applications


Scale ranges in bar [psi]

Gauge pressure				
0 ... 1 [0 ... 15]	0 ... 1.6 [0 ... 20]	0 ... 2.5 [0 ... 30]	0 ... 4 [0 ... 60]	0 ... 6 [0 ... 100]
0 ... 10 [0 ... 160]	0 ... 16 [0 ... 200]	0 ... 25 [0 ... 300]	0 ... 40 [0 ... 600]	
Vacuum and +/- measuring range				
-1 ... +5 [-30 inHg ... +70]	-1 ... +9 [-30 inHg ... +130]		-1 ... +10 [-30 inHg ... +145]	

Installation example, model DSS27M

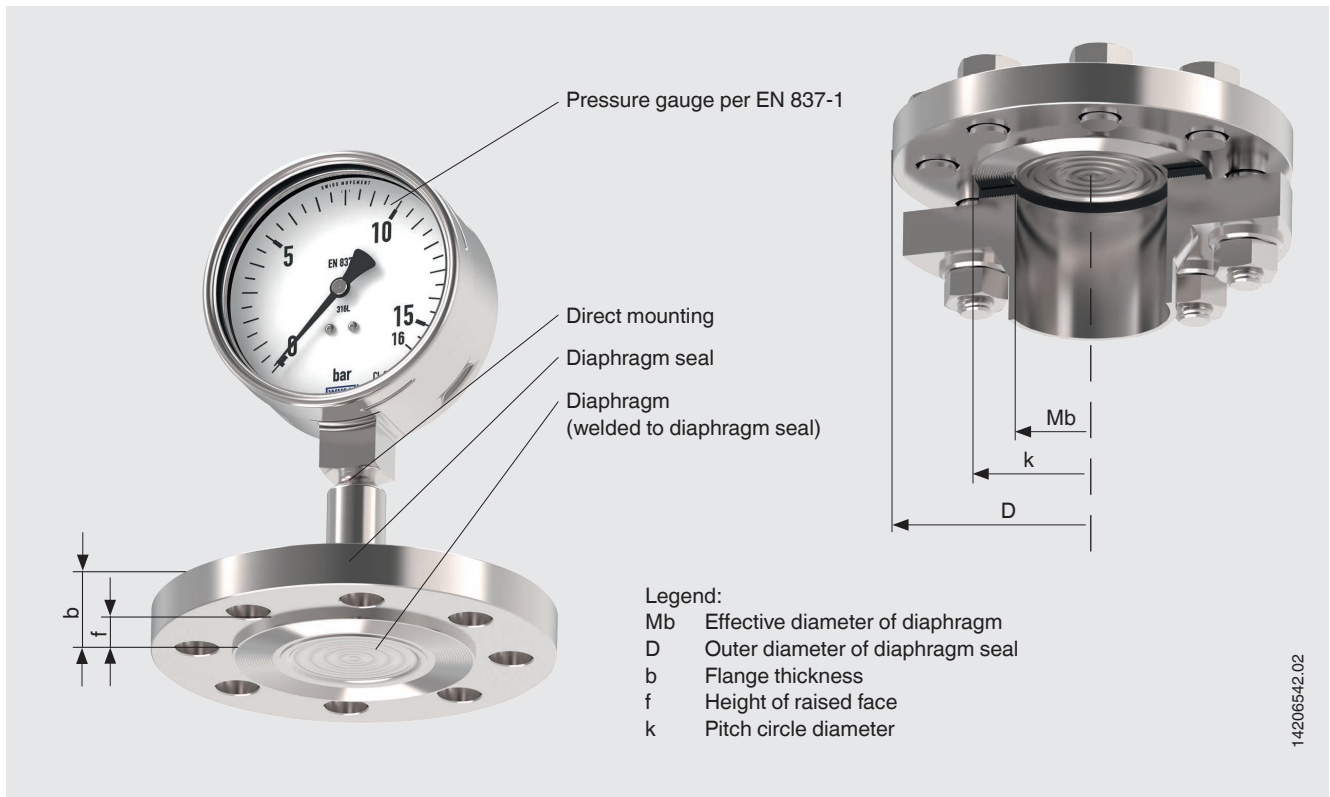

Dimensions in mm [in]

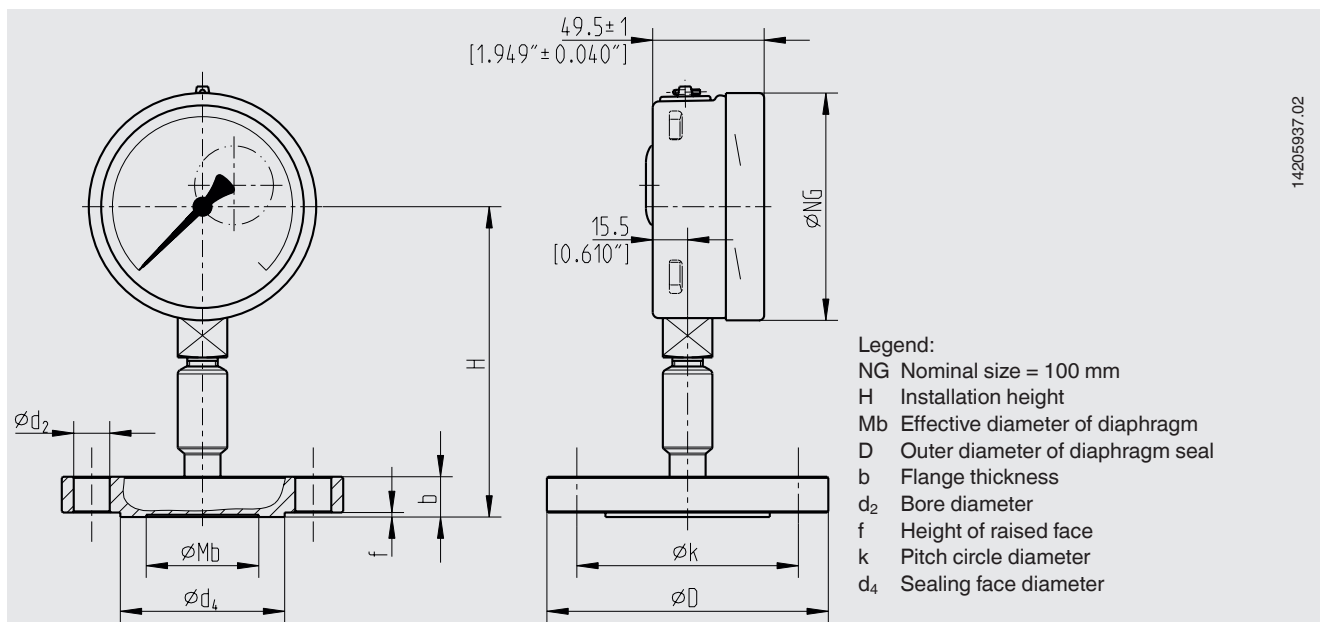

Type of process connection: Flange connection following EN 1092-1

Sealing face: Form B1

DN	PN	Dimensions in mm [in]								
		NG	H	Mb	D	b	k	d ₂	d ₄	f
50	10/40	100	140 [5.512]	59 [2.323]	165 [6.496]	20 [0.787]	125 [4.921]	18 [0.709]	102 [4.016]	2 [0.079]
80	10/16	[3.937]	140 [5.512]	89 [3.504]	200 [7.874]	20 [0.787]	160 [6.299]	18 [0.709]	138 [5.433]	
80	25/40		144 [5.669]			24 [0.945]				

Type of process connection: Flange connection following ASME B16.5

Sealing face: RF 125 ... 250 AA

DN	Class	Dimensions in mm [in]								
		NG	H	Mb	D	b	k	d ₂	d ₄	f
2"	150	100	139.5 [5.491]	59 [2.323]	150 [5.905]	19.5 [0.767]	120.7 [4.752]	19 [0.748]	92 [3.662]	2 [0.079]
	300	[3.937]	142.7 [5.618]		165 [6.496]	22.7 [0.894]	127 [5]			
3"	150		144.3 [5.683]	89 [3.504]	190 [7.48]	24.3 [0.957]	152.4 [6]	19 [0.748]	127 [5]	
	300		149 [5.866]		210 [8.268]	29 [1.142]	168.3 [6.626]	22 [0.866]		

Certificates (option)

3.1 inspection certificate per EN 10204 (e.g. material proof for wetted metallic parts, calibration certificate)

Approvals and certificates, see website

Ordering information

Scale range / Process connection (type of process connection, pipe standard, pipe dimension) / Parts / Certificates

© 03/2017 WIKA Alexander Wiegand SE & Co. KG, all rights reserved.
The specifications given in this document represent the state of engineering at the time of publishing.
We reserve the right to make modifications to the specifications and materials.

WIKA data sheet DS 95.12 · 09/2019

Page 5 of 5

Your WIKA Sales Partner



ICS Schneider Messtechnik GmbH
Briesestrasse 59
D-16562 Hohen Neuendorf / OT Bergfelde
Tel.: +49 3303 5040-66
Fax: +49 3303 5040-68
E-Mail: info@ics-schneider.de



WIKA Alexander Wiegand SE & Co. KG
Alexander-Wiegand-Straße 30
63911 Klingenberg/Germany
Tel. +49 9372 132-0
Fax +49 9372 132-406
info@wika.de
www.wika.de