

## Miniature compression force transducer from 10 N Model F1222

WIKA data sheet FO 51.11

**EAC**

### Applications

- Construction of plant and apparatus
- Measurement and control plant
- Test benches
- Press in forces and joining forces monitoring

### Special features

- Measuring ranges 0 ... 10 N up to 0 ... 5,000 N
- Ease of force input, easy installation
- Compact and small dimensions, low installation height
- Protection class IP65
- Relative linearity error 1 %  $F_{nom}$



Miniature compression force transducer, model F1222

### Description

The miniature compression force transducers are specially designed for small installation spaces. They are used to determine the compression forces in a wide range of applications and are suitable for static and dynamic measurement tasks eg. in laboratories and test field.

The spherical calotte (spherical load application button) allows a very simple force introduction. The usual mounting position of the force transducer is horizontal or vertical. The force transducer is splash-proof and works reliably even under harsh operating conditions.

#### Note

In order to avoid overloading, it is advantageous to connect the force transducers electrically during installation and to monitor the measured value. The force transducers are to be mounted on a level, grinded and sufficiently hard surface. The force is applied vertically to the force transducer axis at the spherical calotte.


#### Options

- Integrated overload protection
- High temperature version with extended nominal temperature range
- Cable amplifier with output 4 ... 20 mA or DC 0 ... 10 V
- Other cable lengths


## Technical data in accordance with VDI/VDE/DKD 2638

Model F1222	
Rated force $F_{nom}$ N	10 / 20 / 50 / 100 / 200 / 500 / 1,000 / 2,000 / 5,000
Relative linearity error $d_{lin}$	$\pm 1 \% F_{nom}$
Relative reversibility error $v$	$\pm 0.25 \% F_{nom}$
Relative repeatability error in unchanged mounting position $b_{rg}$	$\pm 0.1 \% F_{nom}$
Temperature effect on zero signal $TK_0$	$< \pm 0.2 \% / 10 \text{ K}$
Temperature effect on characteristic value $TK_C$	$< \pm 0.4 \% / 10 \text{ K}$
Force limit $F_L$	$150 \% F_{nom}$
Breaking force $F_B$	$> 300 \% F_{nom}$
Permissible oscillation stress acc. to DIN 50100 $F_{rb}$	$70 \% F_{nom}$
Material	Stainless steel
Rated temperature range $B_{T, nom}$	15 ... 70 °C
Operating temperature range $B_{T, G}$	-54 ... +120 °C
Reference temperature $T_{ref}$	23 °C
Output signal (rated output) $C_{nom}$	1.0 mV/V (10 N) 2.0 mV/V (20 N up to 5 kN)
Relative deviation of zero signal $d_{S, 0}$	$\pm 2 \% F_{nom}$
Input/output resistance $R_e/R_a$	350 $\Omega$
Insulation resistance	$> 2 \text{ G}\Omega$
Electrical connection	Cable (PTFE) 1.5 m, open wires, 4-wire, shielded
Supply voltage	
without amplifier	DC 5 V for mV/V output
with cable amplifier	DC 12 ... 28 V for output 0(4) ... 20 mA, DC 0 ... 10 V
Protection (acc. to IEC/EN 60529)	IP65
Weight	1 g up to 10 g (9 g up to 18 g incl. cable) depending on rated force

## Approvals

Logo	Description	Country
	<b>EU declaration of conformity</b> ■ EMC directive ■ RoHS directive	European Union
	<b>EAC (Option)</b> ■ EMC directive	Eurasian Economic Community

## Dimensions in mm

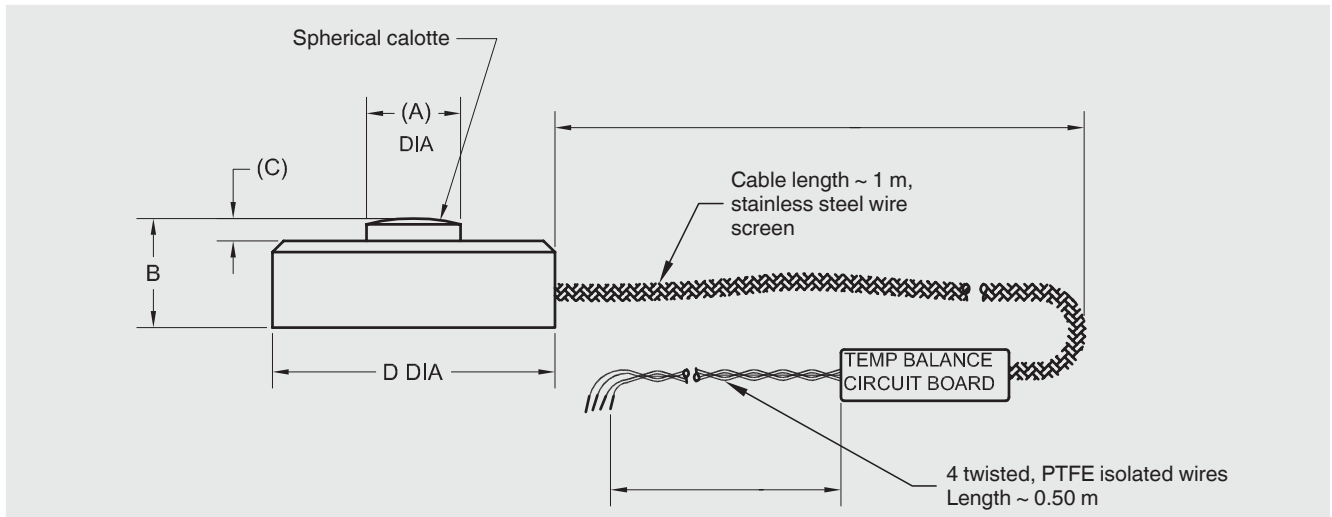

Rated force in N	Dimensions in mm			
	$\varnothing D$	$\varnothing A$	B	C
10 / 20 / 50 / 100 / 200	9.7	2.3	3.3	0.5
500 / 1,000	12.7	3.0	3.8	
2,000 / 5,000	19.1	6.4	6.4	

## Pin assignment

Electrical connection	
Excitation voltage (+)	Red
Excitation voltage (-)	Black
Signal (+)	White
Signal (-)	Green

## Ordering information

Model / Rated force / Relative linearity error / Temperature range / Output signal / Electrical connection / Options

© 2016 WIKA Alexander Wiegand SE & Co. KG, all rights reserved.  
The specifications given in this document represent the state of engineering at the time of publishing.  
We reserve the right to make modifications to the specifications and materials.

WIKA data sheet FO 51.11 · 09/2020

Page 3 of 3

Your WIKA Sales Partner



**ICS Schneider Messtechnik GmbH**

Briesestrasse 59  
D-16562 Hohen Neuendorf / OT Bergfelde  
Tel.: +49 3303 5040-66  
Fax: +49 3303 5040-68  
E-Mail: [info@ics-schneider.de](mailto:info@ics-schneider.de)



**WIKA Alexander Wiegand SE & Co. KG**  
Alexander-Wiegand-Straße 30  
63911 Klingenberg/Germany  
Tel. +49 9372 132-0  
Fax +49 9372 132-406  
[info@wika.de](mailto:info@wika.de)  
[www.wika.de](http://www.wika.de)