

Tension/compression force transducer S-Type up to 50 kN Model F2802

WIKA data sheet FO 51.48

EAC

Applications

- Tension and compression force testing
- Vessel weighing
- Load monitoring in industrial plants

Special features

- Measuring ranges 0 ... 0,5 kN up to 0 ... 50 kN
- Corrosion-resistant stainless steel or steel design
- Protection IP65 (< 5 kN), IP67 (≥ 5 kN)



Tension/compression force transducer, model F2802

Description

Tension/compression force transducers are designed for static and dynamic measurements tasks in the direct flux of force. They determine the tension and compression forces in a wide scope of applications.


Force transducers of this series are used in weighing technology as well as in countless industrial applications, where high accuracy, simple installation with force introduction via the two internal threads and a favorable price plays a decisive role.

Specifications in accordance with VDI/VDE/DKD 2638


Model F2802								
Rated force F_{nom} kN	0.5	1	2	5	10	20	30	50
Rated load F_{nom} kg	50	100	200	500	1,000	2,000	3,000	5,000
Relative linearity error $d_{lin}^{1)}$								
Steel	$\pm 0.03 \% F_{nom}$							
Stainless steel	$\pm 0.05 \% F_{nom}$							
Relative creep, 30 min.								
Steel	$\pm 0.03 \% F_{nom}$							
Stainless steel	$\pm 0.05 \% F_{nom}$							
Relative reversibility v								
Steel	$\pm 0.03 \% F_{nom}$							
Stainless steel	$\pm 0.05 \% F_{nom}$							
Relative repetability error in unchanged mounting position b_{rg}								
Steel	$\pm 0.03 \% F_{nom}$							
Stainless steel	$\pm 0.05 \% F_{nom}$							
Relative deviation of zero signal $d_{s,0}$	$\pm 2 \% F_{nom}$							
Temperature effect on zero signal TK_0	$\leq \pm 0.025 \% / 10 \text{ K}$							
Temperature effect on characteristic value TK_C	$\leq \pm 0.025 \% / 10 \text{ K}$							
Force limit F_L	150 % F_{nom}							
Breaking force F_B	200 % F_{nom}							
Material	Stainless steel, alloy steel							
Rated temperature range $B_{T, nom}$	-10 ... + 40 °C							
Operating temperature range $B_{T, G}$	-20 ... + 80 °C							
Input resistance R_e	385 ± 30 Ω							
Output resistance R_a	350 ± 5 Ω							
Insulation resistance R_{is}	≥ 5,000 MΩ/DC 100 V							
Output signal (rated output) C_{nom}	2.0 ± 0.1 % mV/V							
Electrical connection	Cable Ø 5 x 3,000 mm							
Excitation voltage								
Standard	DC 5 ... 10 V							
Option	DC 12 ... 28 V integrated or cable amplifier 0(4) ... 20 mA DC 0 ... 10 V DC 0 ... 5 V							
Protection (acc. to IEC/EN 60529)	IP65 (< 5 kN), IP67 (≥ 5 kN)							
Weight								
0.5 kN	0.3 kg							
1 kN; 2 kN; 5 kN; 10 kN	0.5 kg							
20 kN; 30 kN	1.3 kg							
50 kN	1.4 kg							

¹⁾ Relative linearity error is specified in chapter 3.2.6 according to VDI/VDE/DKD 2638

Approvals

Logo	Description	Country
	EU Declaration of Conformity ■ EMC Directive ■ RoHS Directive	European Union
	EAC (Option) EMV-Directive	Eurasian Economic Community


Dimensions in mm

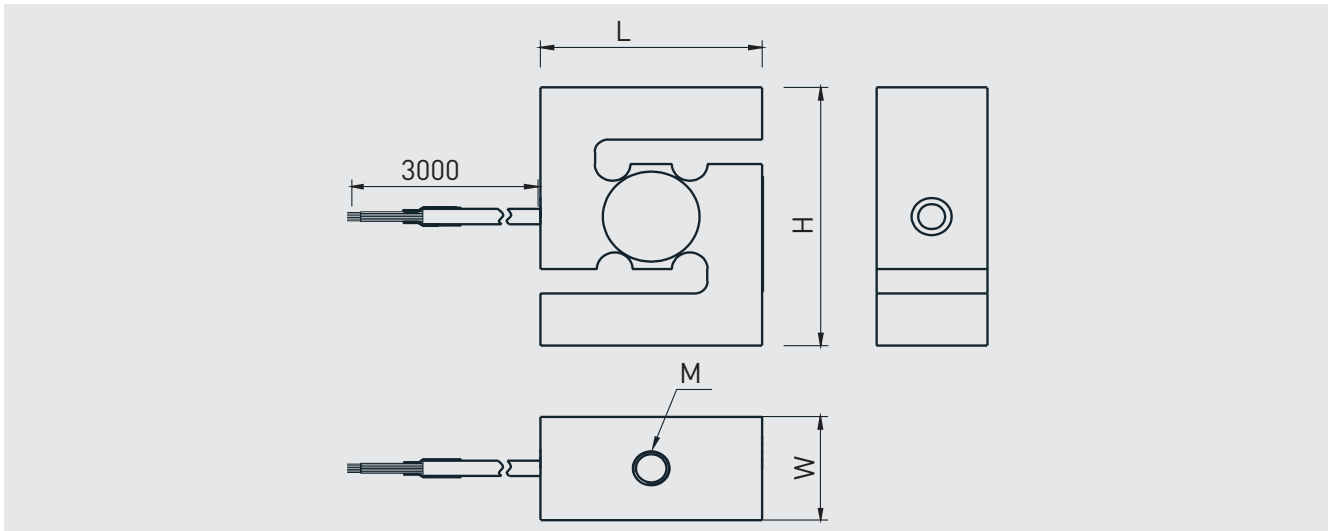

Rated force in kN	Dimensions in mm			
	H	L	W	M
0.5	63.5	50.8	25.4	M8
1; 2	76.2	50.8	25.4	M12
5; 10	87.3	57.2	31	M12
20; 30	100	69.8	36.5	M24 x 2
50	114.3	76.2	36.5	M24 x 2

Pin assignment

Electrical connection	
Excitation voltage (+)	Red
Excitation voltage (-)	Black
Signal (+)	Green
Signal (-)	White
Shield	Shield

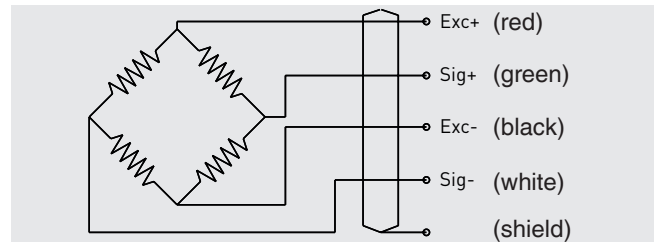

Note for installation

In order to avoid overloading, it is necessary to connect the force transducer electrically during installation and to monitor the measured value.

The force to be measured must be applied concentrically and free of transverse force. The force transducers are to be mounted on a level surface.

© 06/2019 WIKA Alexander Wiegand SE & Co. KG, all rights reserved.
The specifications given in this document represent the state of engineering at the time of publishing.
We reserve the right to make modifications to the specifications and materials.

WIKA data sheet FO 51.48 08/2022

page 3 of 3

Your WIKA Sales Partner



ICS Schneider Messtechnik GmbH
Briesestrasse 59
D-16562 Hohen Neuendorf / OT Bergfelde
Tel.: +49 3303 5040-66
Fax: +49 3303 5040-68
E-Mail: info@ics-schneider.de



WIKAL Alexander Wiegand SE & Co. KG
Alexander-Wiegand-Straße 30
63911 Klingenberg/Germany
Tel. +49 9372 132-0
Fax +49 9372 132-406
info@wika.de
www.wika.de