

# Miniature tension/compression force transducer To 2,000 N Model F2808

WIKA data sheet FO 51.68

**EAC**

## Applications

- Tension and compression force testing
- Vessel weighing
- Load monitoring in industrial plants
- Riveting machines

## Special features

- Measuring ranges 0 ... 5 N to 0 ... 2,000 N
- Overload protection
- Ultracompact version
- Material: Stainless steel



Miniature tension/compression force transducer,  
model F2808

## Description

The miniature tension/compression force transducers are suitable for static and dynamic measuring requirements in the direct force flow. They serve for determining tension and compression forces in diverse application areas.



These force transducers are used in testing technology and also in numerous industrial applications where simple installation and an inexpensive price play a key role.

## Specifications per VDI/VDE/DKD 2638


Model F2808	
Rated force $F_{nom}$ N	5 / 10 / 20 / 50 / 100 / 200 / 250 / 300 / 500 / 1,000 / 2,000
Relative linearity error $d_{lin}^{1)}$	$\pm 0.15 \% F_{nom}$
Relative creep, 30 min.	$\pm 0.1 \% F_{nom}$
Relative reversibility error $v$	$\pm 0.1 \% F_{nom}$
Relative repeatability error in unchanged mounting position $b_{rg}$	$\pm 0.1 \% F_{nom}$
Relative deviation of zero signal $d_{s,0}$	$\pm 2 \% F_{nom}$
Force limit $F_L$	150 % $F_{nom}$
Breaking force $F_B$	300 % $F_{nom}$
Material of the measuring body	Stainless steel
Rated temperature range $B_{T, nom}$	-10 ... +40 °C
Operating temperature range $B_{T, G}$	-20 ... +80 °C
Input resistance $R_e$	380 $\pm$ 30 $\Omega$
Output resistance $R_a$	380 $\pm$ 30 $\Omega$
Insulation resistance $R_{is}$	$\geq 5,000 \text{ M}\Omega/\text{DC } 100 \text{ V}$
Output signal (rated characteristic value) $C_{nom}$	
5 N	1.5 $\pm$ 0.15 mV/V
$\geq 10 \text{ N}$	2.0 $\pm$ 0.2 mV/V
Electrical connection	
M3, M4	Cable $\varnothing 2 \times 3,000 \text{ mm}$
M8	Cable $\varnothing 3 \times 3,000 \text{ mm}$
Excitation voltage $B_{U, nom}$	DC 5 V (max. 7 V)
Ingress protection (per IEC/EN 60529)	IP66
Weight in kg	0.1

<sup>1)</sup> Relative linearity error is specified in accordance with guideline VDI/VDE/DKD 2638 chap. 3.2.6

## Approvals

Logo	Description	Region
	EU declaration of conformity	European Union
	EMC directive	
	RoHS directive	
	EAC (option)	Eurasian Economic Community
	EMC directive	


## Dimensions in mm

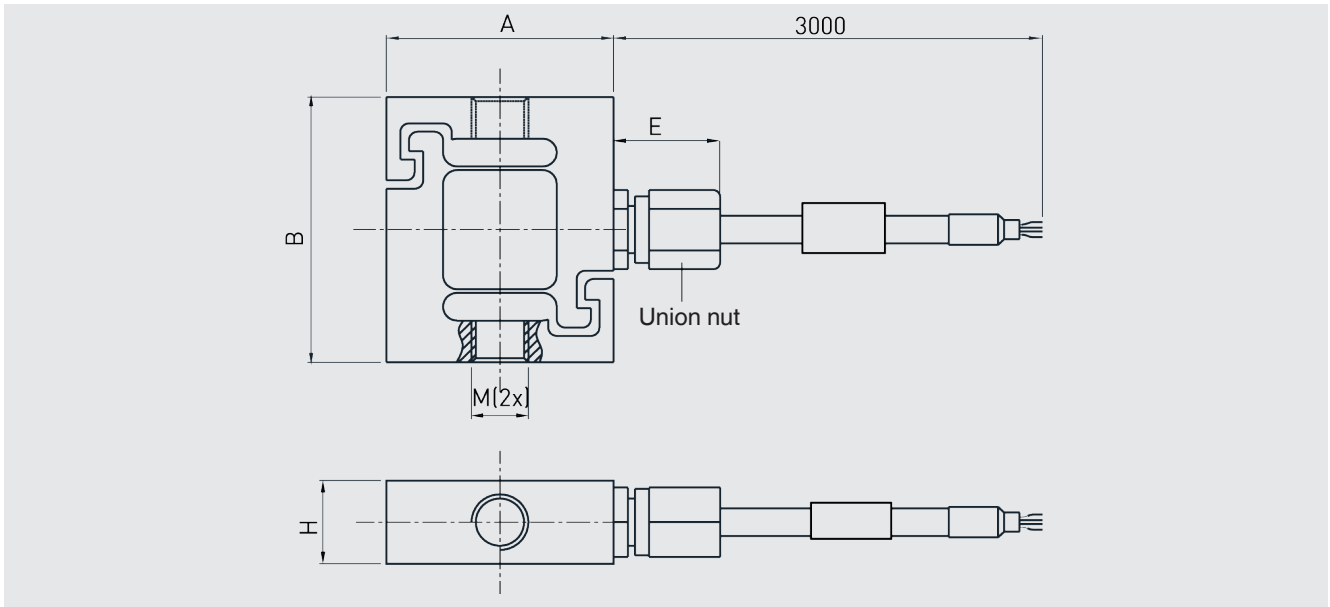

Rated force in N	Dimensions in mm						
	A	B	E	H	M	Ø cable	Union nut
5 / 10 / 20	16	19.1	7.5	6	M3	2	M4
50 / 100 / 200 / 300 / 500	16	19.1	13	6	M4	2	M4
250 / 300 / 500 / 1,000 / 2,000	26	40	13	14	M8	3	M6

## Pin assignment

Electrical connection	
Excitation voltage (+)	Red
Excitation voltage (-)	Black
Signal (+)	Green
Signal (-)	White
Shield	Shield

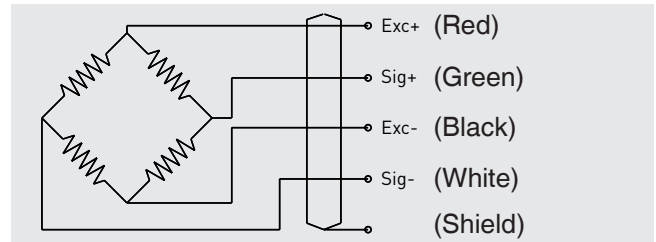

### Note for mounting

To avoid overloading, it is necessary to connect the force transducer electrically during assembly and to monitor the measured value. The measuring force must be introduced through the centre and free of transverse force. For the installation of the force transducer the support surface must be flat.

© 03/2018 WIKA Alexander Wiegand SE & Co. KG, all rights reserved.  
The specifications given in this document represent the state of engineering at the time of publishing.  
We reserve the right to make modifications to the specifications and materials.