


Instrumentation Products

Air Headers

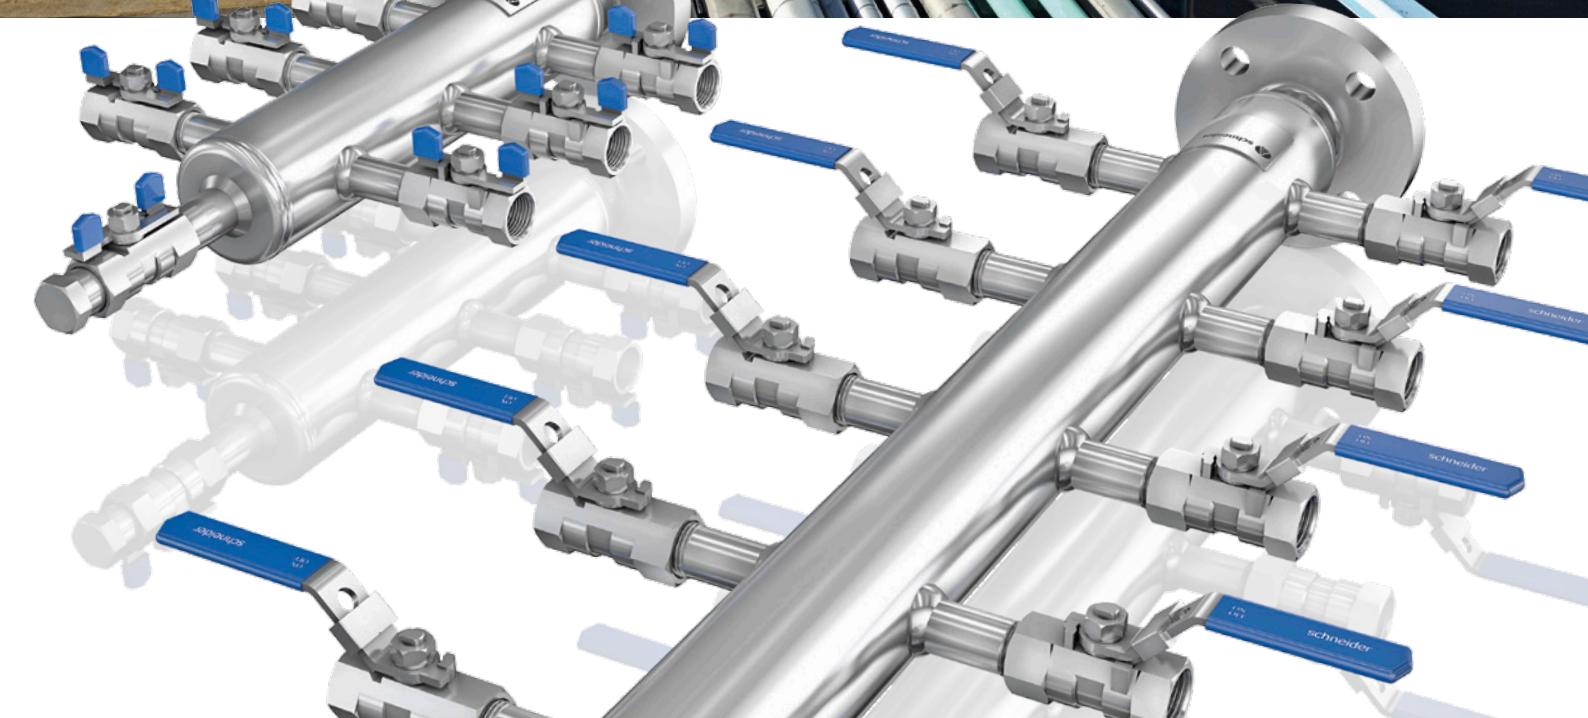

General Features

Introduction

The AS-Schneider Group with its headquarters in Germany is one of the World's Leading Manufacturers of Instrumentation Valves and Manifolds. AS-Schneider offers a large variety of Air Headers needed for the instrumentation installations globally.

AS-Schneider Air Headers are used to supply several users with instrument air. Besides multiple types of standard styles we also supply the Air Headers in accordance with specific customer demands.

Selection can be made from a comprehensive range of pipe styles with a variety of connections and material options, optimising installation and access opportunities. Some of the Air Headers shown in this catalogue are available from stock or within a short period of time. The dimensions shown in this catalogue apply to standard types. If you need the dimensions for your individual type please contact the factory.

Continuous product development may from time to time necessitate changes in the details contained in this catalogue. AS-Schneider reserves the right to make such changes at their discretion and without prior notice.

All dimensions shown in this catalogue are approximate and subject to change.


Standard Features

- Distribution Pipe:
 - 2" Pipe
- Lever Operated Ball Valves with Locking Device
- Inlet:
 - Flange according to ASME or EN
 - Threaded
- Outlet Ports:
 - Ball Valves
 - Needle Valves
 - Tube Fittings
 - Threaded
- Material
 - Stainless Steel

Optional Features

- Mounting Bracket
- Certificates according to EN 10204

Pressure-Temperature Rating:
Max. allowable (Working) Pressure (PS): 40 bar (580 psi)
Max. allowable Temperature (TS): 50°C (122°F)

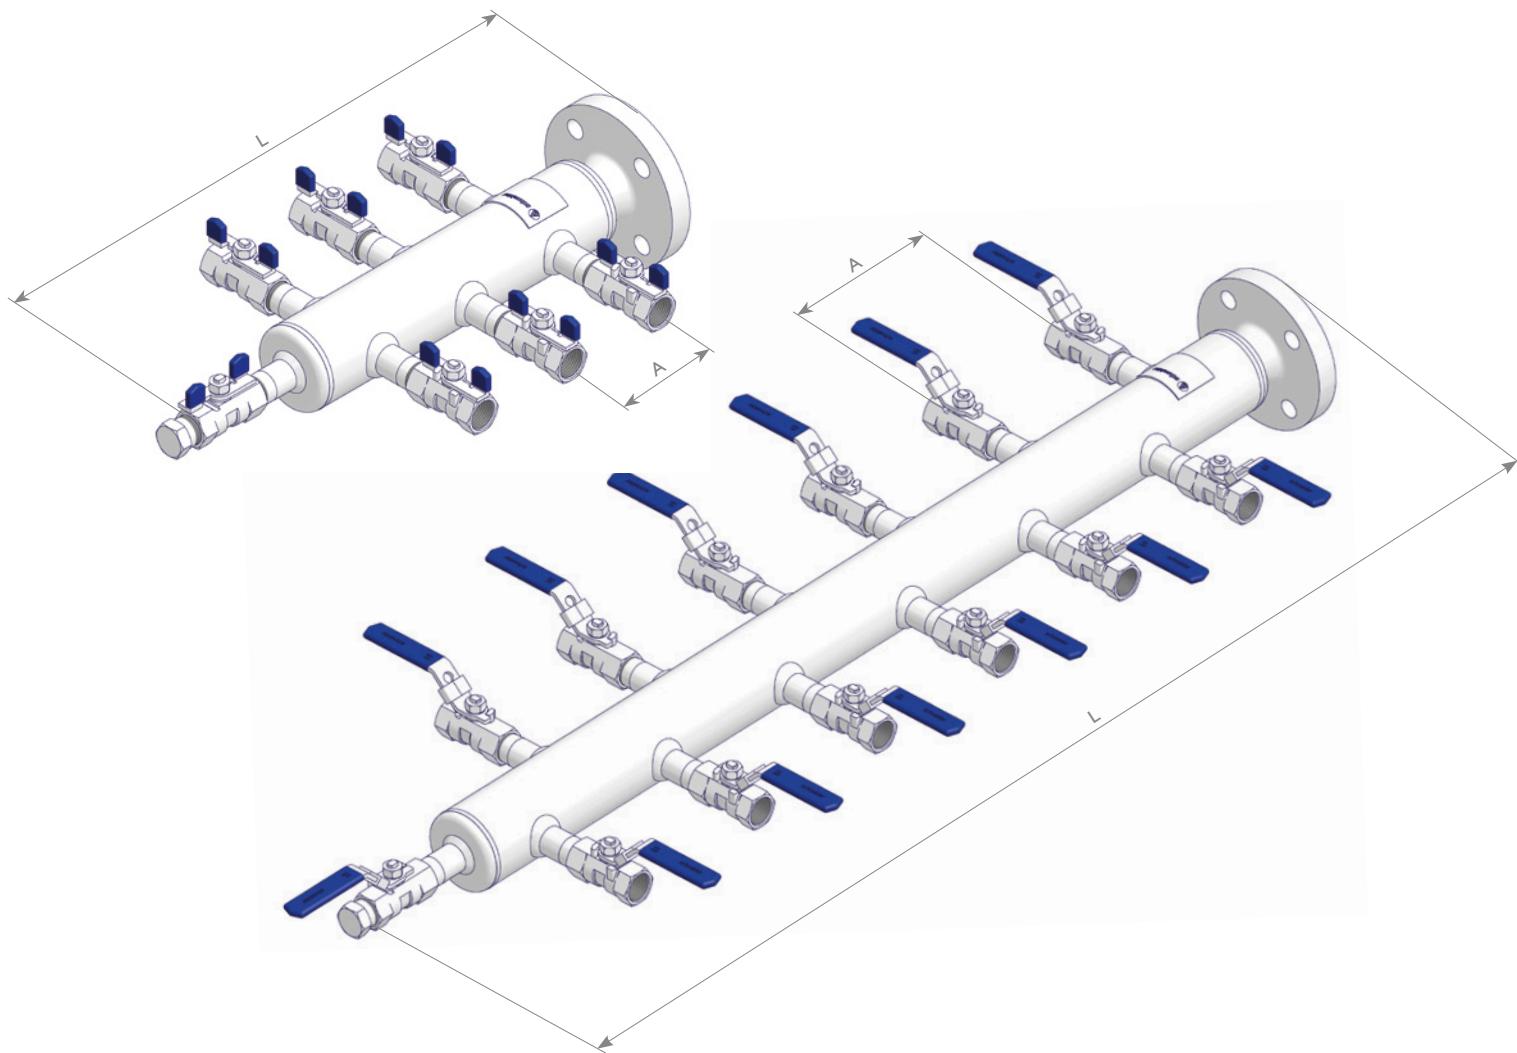

Ordering Information

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15		
L	2	0	6	-	N	G	A	-	A	0	4	4	P			
Air Headers																
Size																
2	2" Pipe															
Number of Outlet Ports		Approx. Length (L)														
				Dim. A 80 mm	Dim. A 120 mm											
		06	6 Outlets (3 on each side)	400 mm	480 mm											
		08	8 Outlets (4 on each side)	470 mm	590 mm											
		10	10 Outlets (5 on each side)	570 mm	730 mm											
		12	12 Outlets (6 on each side)	650 mm	850 mm											
		36	6 Outlets (3 on each side, offset)	500 mm	580 mm											
42	12 Outlets (6 on each side, offset)	740 mm	940 mm													
Inlet																
NGA	Flange 1" Class 150 RF	JN6	3/4 NPT Male													
NGB	Flange 1" Class 300 RF	JN8	1 NPT Male													
QLD	Flange EN1092-1 DN25 PN40 B1	LN6	3/4 NPT Female													
JJ6	G 3/4 Male (BSP Parallel)	LN8	1 NPT Female													
JR8	R 1 Male (BSP Tapered)															
LP6	Rp 3/4 Female (BSP Parallel)															
LP8	Rp 1 Female (BSP Parallel)															
Outlet Port		Dimension A														
A04	Ball Valve 1/2 NPT Female, Butterfly Handle		80 mm													
A02	Ball Valve 1/4 NPT Female, Butterfly Handle		80 mm													
B04	Ball Valve 1/2 NPT Female, Lever Operated		120 mm													
B02	Ball Valve 1/4 NPT Female, Lever Operated		120 mm													
ATD	Ball Valve, Butterfly Handle with Single Ferrule Tube Fitting Size 12S		80 mm													
BTD	Ball Valve, Lever Operated with Single Ferrule Tube Fitting Size 12S		120 mm													
AKD	Ball Valve, Butterfly Handle with Twin Ferrule Tube Fitting 12 mm		80 mm													
AKM	Ball Valve, Butterfly Handle with Twin Ferrule Tube Fitting 1/2"		80 mm													
BKD	Ball Valve, Lever Operated with Twin Ferrule Tube Fitting 12 mm		120 mm													
BKM	Ball Valve, Lever Operated with Twin Ferrule Tube Fitting 1/2"		120 mm													
004	1/2 NPT Male		80 mm													
002	1/4 NPT Male		80 mm													
Drain Connection																
4	Valve Type as above, 1/2 NPT plugged															
2	Valve Type as above, 1/4 NPT plugged															
J	1/2 NPT Male															
H	1/4 NPT Male															
Material																
P	Stainless Steel															
Options – Specify in alphabetical order (digits first, then letters)																
P	Mounting Bracket for 2" Pipe c/w 'U' Bolt															
W	Mounting Bracket for Wall Mounting															

