

Instrumentation Products

Air Headers



General Features

Introduction

The **AS-Schneider Group** with its headquarters in Germany is one of the World's Leading Manufacturers of Instrumentation Valves and Manifolds. **AS-Schneider** offers a large variety of Air Headers needed for the instrumentation installations globally.

AS-Schneider Air Headers are used to supply several users with instrument air. Besides multiple types of standard styles we also supply the Air Headers in accordance with specific customer demands.

Selection can be made from a comprehensive range of pipe styles with a variety of connections and material options, optimising installation and access opportunities. Some of the Air Headers shown in this catalogue are available from stock or within a short period of time. The dimensions shown in this catalogue apply to standard types. If you need the dimensions for your individual type please contact the factory.

Continuous product development may from time to time necessitate changes in the details contained in this catalogue. AS-Schneider reserves the right to make such changes at their discretion and without prior notice.

All dimensions shown in this catalogue are approximate and subject to change.

Standard Features


- Distribution Pipe:
 - 2" Pipe
- Lever Operated Ball Valves with Locking Device
- Inlet:
 - Flange according to ASME or EN
 - Threaded
- Outlet Ports:
 - Ball Valves
 - Needle Valves
 - Tube Fittings
 - Threaded
- Material
 - Stainless Steel

Optional Features

- Mounting Bracket
- Certificates according to EN 10204

Pressure-Temperature Rating:

Max. allowable (Working) Pressure (PS): 40 bar (580 psi)
Max. allowable Temperature (TS): 50°C (122°F)

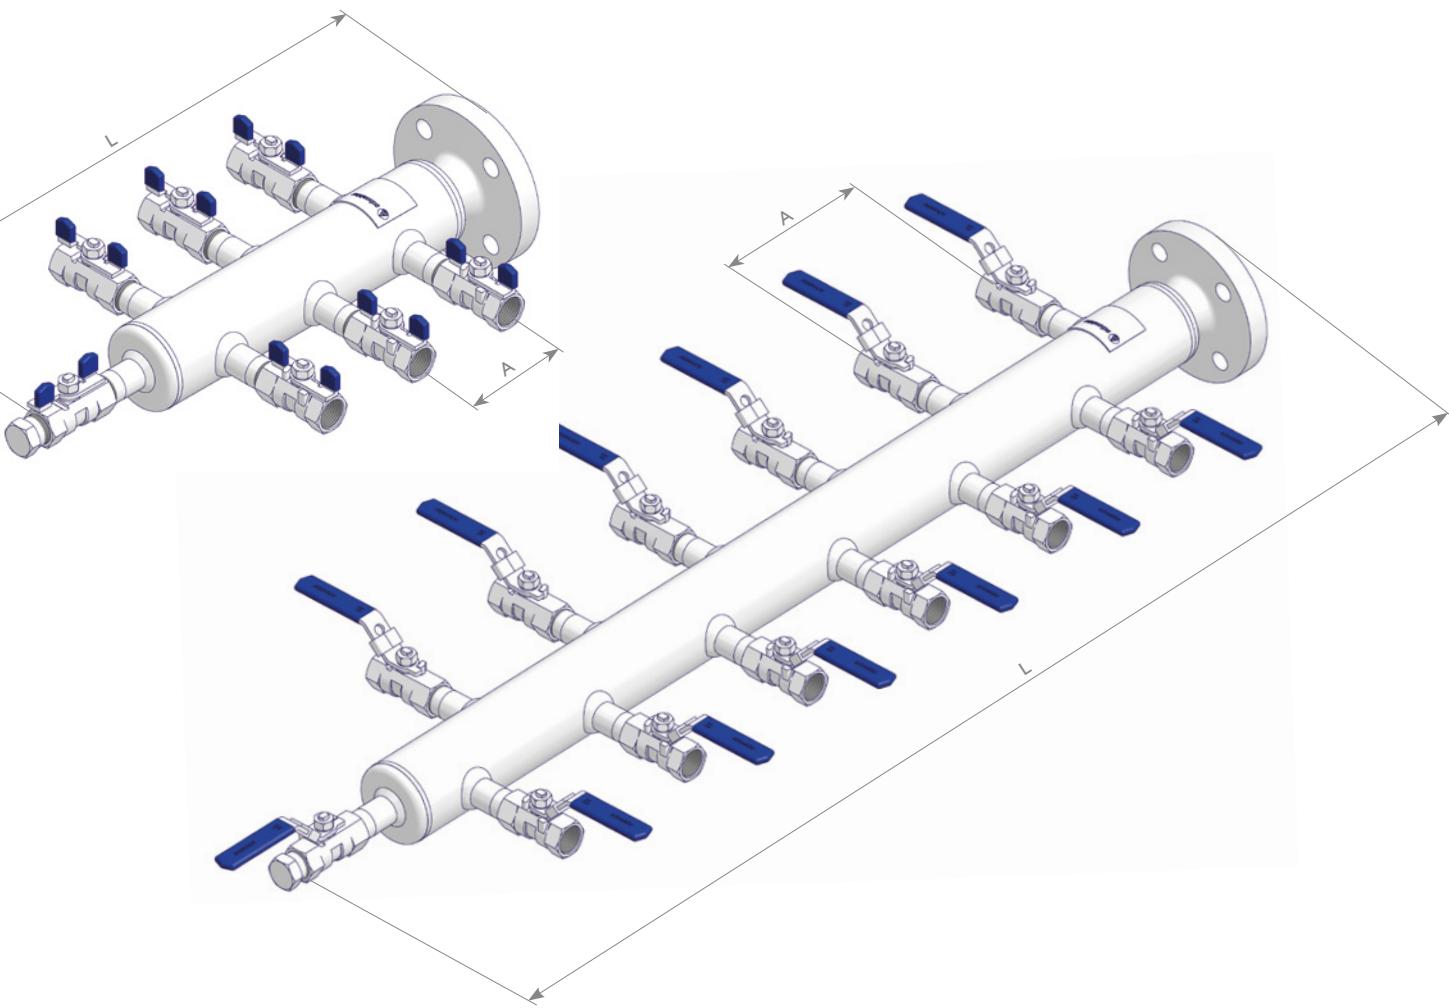

Ordering Information

Ordering Information

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15				
L	2	0	6	-	N	G	A	-	A	0	4	4	P					
Air Headers																		
Size																		
2	2" Pipe																	
Number of Outlet Ports		Approx. Length (L)																
				Dim. A 80 mm		Dim. A 120 mm												
		06	6 Outlets (3 on each side)	400 mm		480 mm												
		08	8 Outlets (4 on each side)	470 mm		590 mm												
		10	10 Outlets (5 on each side)	570 mm		730 mm												
		12	12 Outlets (6 on each side)	650 mm		850 mm												
		36	6 Outlets (3 on each side, offset)	500 mm		580 mm												
42	12 Outlets (6 on each side, offset)	740 mm		940 mm														
Inlet																		
NGA	Flange 1" Class 150 RF	JN6	3/4 NPT Male															
NGB	Flange 1" Class 300 RF	JN8	1 NPT Male															
QLD	Flange EN1092-1 DN25 PN40 B1	LN6	3/4 NPT Female															
JJ6	G 3/4 Male (BSP Parallel)	LN8	1 NPT Female															
JR8	R 1 Male (BSP Tapered)																	
LP6	Rp 3/4 Female (BSP Parallel)																	
LP8	Rp 1 Female (BSP Parallel)																	
Outlet Port		Dimension A																
		A04	Ball Valve 1/2 NPT Female, Butterfly Handle															
		A02	Ball Valve 1/4 NPT Female, Butterfly Handle															
		B04	Ball Valve 1/2 NPT Female, Lever Operated															
		B02	Ball Valve 1/4 NPT Female, Lever Operated															
		ATD	Ball Valve, Butterfly Handle with Single Ferrule Tube Fitting Size 12S															
		BTD	Ball Valve, Lever Operated with Single Ferrule Tube Fitting Size 12S															
		AKD	Ball Valve, Butterfly Handle with Twin Ferrule Tube Fitting 12 mm															
		AKM	Ball Valve, Butterfly Handle with Twin Ferrule Tube Fitting 1/2"															
		BKD	Ball Valve, Lever Operated with Twin Ferrule Tube Fitting 12 mm															
BKM	Ball Valve, Lever Operated with Twin Ferrule Tube Fitting 1/2"																	
004	1/2 NPT Male																	
002	1/4 NPT Male																	
Drain Connection																		
4	Valve Type as above, 1/2 NPT plugged																	
2	Valve Type as above, 1/4 NPT plugged																	
J	1/2 NPT Male																	
H	1/4 NPT Male																	
Material																		
P	Stainless Steel																	
Options – Specify in alphabetical order (digits first, then letters)																		
P	Mounting Bracket for 2" Pipe c/w 'U' Bolt																	
W	Mounting Bracket for Wall Mounting																	

