

Instrumentation Products

E Series Valves and Manifolds



Introduction

Introduction

The AS-Schneider Group with its headquarters in Germany is one of the World's Leading Manufacturers of Instrumentation Valves and Manifolds. AS-Schneider offers a large variety of E Series Valves and Manifolds as well as numerous accessories needed for the instrumentation installations globally.

Selection can be made from a comprehensive range of bodies with a variety of connections and material options, optimising installation and access opportunities. Many of the valves shown in this catalogue are available from stock or within a short period of time. The dimensions shown in this catalogue apply to standard types – very often 1/2 NPT tressed. If you need the dimensions for your individual type please contact the factory.

Note: Not every configuration which can be created in the ordering information is feasible / available.

Continuous product development may from time to time necessitate changes in the details contained in this catalogue. AS-Schneider reserves the right to make such changes at their discretion and without prior notice.

All dimensions shown in this catalogue are approximate and subject to change.



Introduction	page 2
Contents	page 3
General Features	page 4
Valve Head Unit Options	page 5-11
Connections	page 12-13
Hand Valves	page 14-15
Gauge Valves	page 16-17
Multiport Gauge Valves	page 18-19
Block & Bleed and Double Block & Bleed Manifolds	page 20-21
L, Y & W-Shaped Manifolds	page 22-24
Remote Mounted Manifolds	page 25-27
Direct Mount Manifolds	
Wafer Style	page 28-33
Traditional Style	page 34-37
Integral Style	page 38-40
5 Valve Manifolds with Natural Gas Metering Pattern	page 41-42
Enclosure Manifolds EDM Series	page 43-45
Differential Pressure Gauge Manifolds	page 46-47
Accessories	page 48-53
Check Valves	page 54
Complementary Products	page 55
Technical Service Portal - Digital Valve Plate (DVP)	page 56

General Features

Body Material Options

Material Group	AS Material Designation	Material No.	Short Name	Equivalent UNS-No.	Material Grade acc. to ASTM	E Series Needle Valves and Manifolds
Carbon Steel	A105				A105	Optional
Austenitic Stainless Steel	316 quadruple certified*	1.4401	X5CrNiMo17-12-2	S31600	316	Standard
		1.4404	X2CrNiMo17-12-2	S31603	316L	Standard
	6Mo	1.4547	X 1CrNiMoCuN20-18-7	S31254		Standard
Austenitic-Ferritic Stainless Steel	Duplex	1.4462	X2CrNiMoN22-5-3	S31803	F51	Standard
	Superduplex	1.4410	X2CrNiMoN25.7.4	S32750	F53	Standard
Nickel Based Alloys	Alloy 400	2.4360	NiCu30Fe	N04400		Standard
	Alloy C-276	2.4819	NiMo 16 Cr 15 W	N10276		Standard
	Alloy 625	2.4856	NiCr22Mo9Nb	N06625		Standard
	Alloy 825	2.4858	NiCr21Mo	N08825		Optional
Titanium	Titanium Grade 2	3.7035	Ti-II	R50400		Optional

* Quadruple Certified means 316 / 316L / 1.4401 / 1.4404

Standard Features

- Bore Size 5 mm
- Manifolds are not supplied with plugs unless specified.
- Anti-Tamper Head Unit Options see Page 11.

Needle Seal:

PTFE and Graphite Packings are available for all valve types. Alternatively O-Ring stem seal and Bellows Sealed Head Units – see Page 6–10.

Sour Gas Service:

Wetted Parts according to a.m. material list are supplied as standard according to NACE MR0175/MR0103 and ISO 15156 (latest issue) – Standard Material only (see last column), except Titanium Grade 2.

Pressure Test:

A shell test and a seat leakage test are performed at 1.5 times the max. allowable (working) pressure acc. to EN 12266-1 – P10, P11 and P12 respectively MSS-SP61 at every standard AS-Schneider E Series Needle Valve / Manifold → 100% Pressure Tested!

Certification:

Inspection Certificate 3.1 acc. to EN 10 204 for valve body material and pressure test available on request.

The manifolds can be provided by default with a

- CRN Certificate
- EAC Certificate – Manifolds are marked with EAC

Valves with Graphite Packings are Fire Safe Tested and Certified according to ISO 10497 and API 607.

Optional Features

- Soft Seated Needle Valves: Bore Size 6.35 mm (1/4")
- Bore Size 10 mm

Fugitive Emission Application:

For Fugitive Emission Applications AS-Schneider is providing bellows sealed valves with safety packing. Choice of Pressure class PN 100 or PN 250. The bellows are submitted to a 100% Helium leak test. The leak rate is 10^{-8} mbar l/s. Optional available are TA-Luft and ISO 15848 solutions. For more details see Pages 9 and 10.

Oxygen Service:

AS-Schneider offers an option with Reinforced PTFE Packing cleaned and lubricated for Oxygen Service:

Pressure-Temperature Rating:

Max. 420 bar (6,092 psi) @ 60°C (140°F)
Max. 200°C (392°F) @ 90 bar (1,305 psi)

Not every Valve Type is available for Oxygen Service!

If you don't find your options in this catalogue, please contact the factory.

Standard Valve Head Units

Standard Bonnet Design

T Handle

Ergonomic Handle Design.
Operating options are Anti-Tamper features
or a Stainless Steel Handwheel.

Valve Stem

Stem with cold rolled threads for high
strength and smooth operation.

Needle Seal

Standard: PTFE or Graphite Packing
Options: O-Ring or Bellows Sealed

Needle

Non-rotating Needle for smooth operation
and minimum wear of sealing elements.

Back Seat

Metal to Metal secondary needle seal and
therefore the needle is anti-blowout /
non-removable – For your safety.

Needle Tip

Choices of Needle Tip Materials such as
Stellite, and Soft Tips like PCTFE and POM.

Valve Seat

Metal seated (integral type) and
Soft seated → See Page 7 and Catalogue
AS-4302.



Color Coded Dust Cap

For operating thread protection:

Isolate
Vent/Test
Equalize

BLUE
RED
GREEN

Color Coded Options

Following options are also color coded
below dust cap:

Oxygen Service
Graphite Packing
FKM O-ring Stem Seal
with PCTFE Soft Tip
TA-Luft Option

WHITE
BLACK
ORANGE
MAGENTA

Lock Pin

Eliminates unauthorized removal of the
bonnet assembly.

Bonnet


Metal to Metal Seal to Valve Body.

Traceability of Materials

All AS-Schneider E Series Valves and
Manifolds have material traceability.
A unique code is stamped on all valve
bodies linking them with their material
and chemical analysis certificates.

Flow Data

Needle Valves Standard Head Unit – Bore Size 5 mm

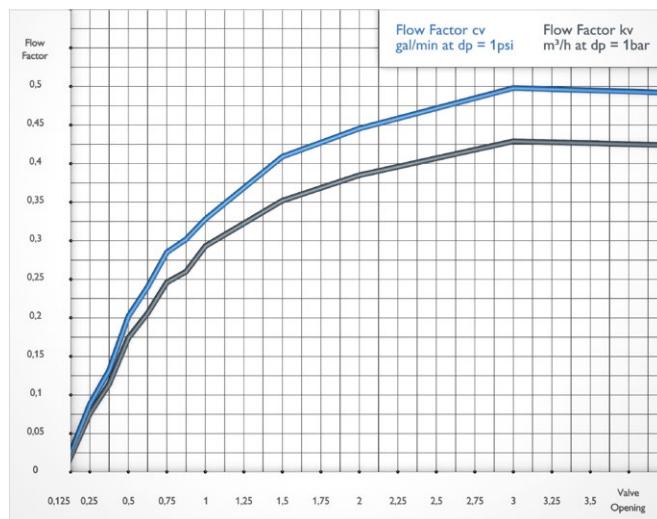

Standard Valve Head Units

Standard Needle Valves


Screwed Bonnet – Stem Seal: Packing

Features

- Integral Valve Seat – Metal to Metal Seated
- Soft Tip PCTFE or POM optional
- Non-rotating Needle
- External Stem Thread – Packing below stem threads. Stem Threads are protected from process media (non-wetted), helps to prevent stems from galling.
- Stem with cold rolled threads
- Blow-out proof Needle
- Back Seat – Metal to metal secondary needle seal
- Lock Pin – Eliminates unauthorized removal of the bonnet
- Color Coded Dust Cap for operating thread protection
- Standard Packing in PTFE and Graphite available
- Carbon filled PTFE Packing - TA-Luft option
- Max. allowable (Working) Pressure (PS): 420 bar (6,092 psi)
– 689 bar (10,000 psi) optional
- Panel Mount Option available
- Anti-Tamper Valve Head Options available
- All non-wetted parts in 316 stainless steel


Standard Design

420 bar (6,092 psi)

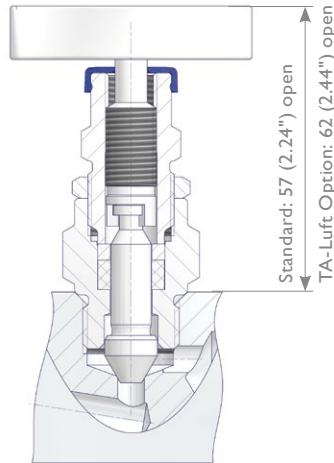

High Pressure Design

689 bar (10,000 psi) and 500 bar (7,252 psi)

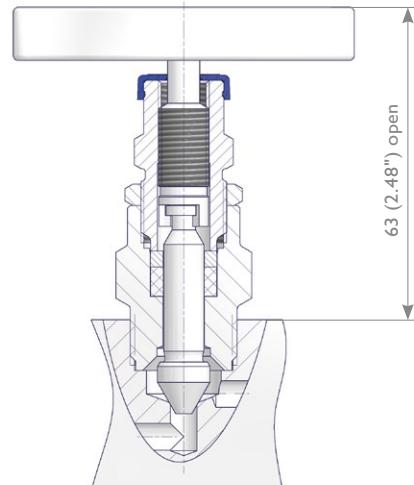


Body-to-Bonnet Seal is below the threads eliminating process fluid corrosion.

Color Coded Options


Graphite Packing




Oxygen Service

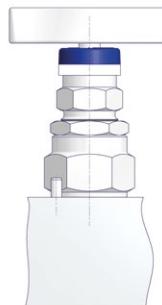

TA-Luft Option

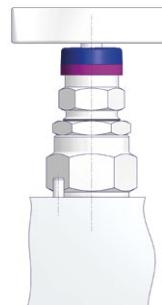

Panel Mount Option

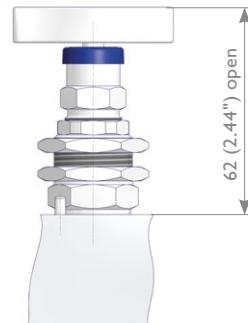

Components	Stainless Steel		Exotic Alloys												
	Material / Material No.														
Body	316 / 316L	Alloy 400	Alloy C-276	Duplex	UNS S32750	Alloy 625	6Mo	Titanium Gr. 2							
Bonnet															
Needle															
Pipe Plug															
Valve Stem	316 / 316L														
Gland	316														
Packing	PTFE or Graphite														
Stem Nut	316														
Lock Nut	316														
Set Screw	316														
T Handle	316														
Lock Pin	A4 (316)														

Wetted components listed in **bold**.


Standard Valve Head Units

Needle Valves according ASME B31.1 (Power Piping)

Screwed Bonnet – Stem Seal: Graphite Packing
Meet the requirements of ASME B31.1 (Power Piping).
A Locking Plate eliminates an unauthorized removal of the bonnet.

Features

- Integral Valve Seat – Metal to Metal Seated
- Non-rotating Needle
- External Stem Thread – Packing below stem threads.
Stem Threads are protected from process media (non wetted),
helps to prevent stems from galling.
- Stem with cold rolled threads
- Blow-out proof Needle
- Back Seat – Metal to metal secondary needle seal
- Locking Plate – Eliminates unauthorized removal of the bonnet
- Color Coded Dust Cap for operating thread protection
- Max. allowable (Working) Pressure (PS): 414 bar (6,000 psi)
- Anti-Tamper Valve Head Options available
- All non-wetted parts in 316 stainless steel



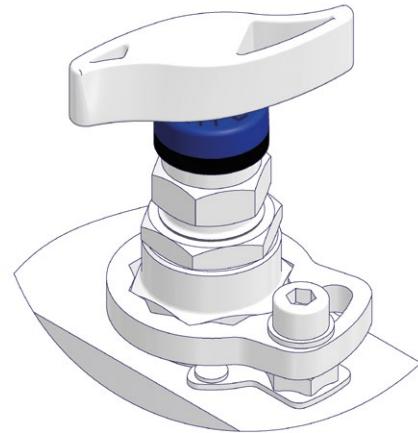


Needle Valves with O-Ring Stem Seal

Screwed Bonnet – O-Ring Stem Seal

Features

- Integral Valve Seat
- Non-rotating Needle
- External Stem Thread – Packing below stem threads.
Stem Threads are protected from process media (non-wetted),
helps to prevent stems from galling.
- Stem with cold rolled threads
- Blow-out proof Needle
- Back Seat – Metal to metal secondary needle seal
- Lock Pin – Eliminates unauthorized removal of the bonnet
- Color Coded Dust Cap for operating thread protection
- O-Ring FKM, optional EPDM
- Soft Tip PCTFE or POM
- Max. allowable (Working) Pressure (PS): 420 bar (6,092 psi)
- Panel Mount Option not available
- Anti-Tamper Valve Head Options available
- All non-wetted parts in 316 stainless steel

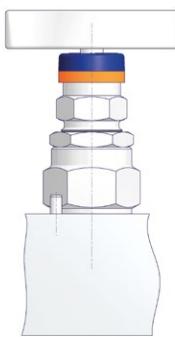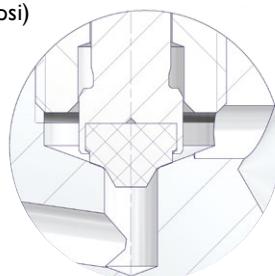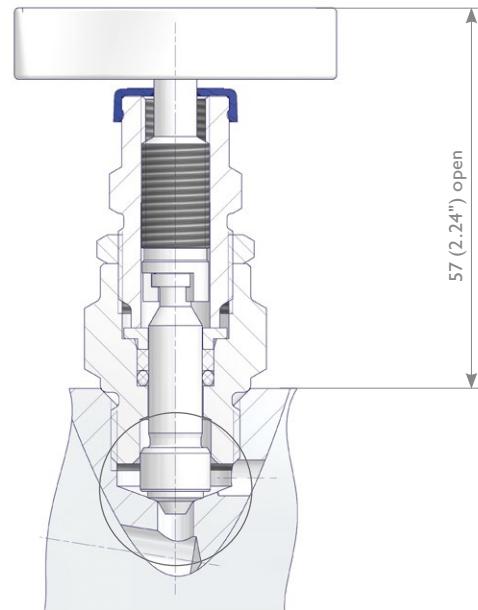

Color Coded Option
FKM O-Ring Stem Seal
with PCTFE Soft Tip


Standard Valve Head Units

Needle Valves with OS&Y Bolted Bonnet


OS&Y Bolted Bonnet – Standard Packing

Features

- Integral Valve Seat – Metal to Metal Seated
- Non-rotating Needle
- External Stem Thread – Packing below stem threads.
Stem Threads are protected from process media (non-wetted), helps to prevent stems from galling.
- Stem with cold rolled threads
- Blow-out proof Needle
- Spring Washers for compensation of thermal expansion
- Back Seat – Metal to metal secondary needle seal
- Color Coded Dust Cap for operating thread protection
- Max. allowable (Working) Pressure (PS): 420 bar (6,092 psi)
- Anti-Tamper Valve Head Options available
- PTFE or Graphite Packing
- Bonnet Seal Ring: Graphite
- All non-wetted parts in 316 stainless steel

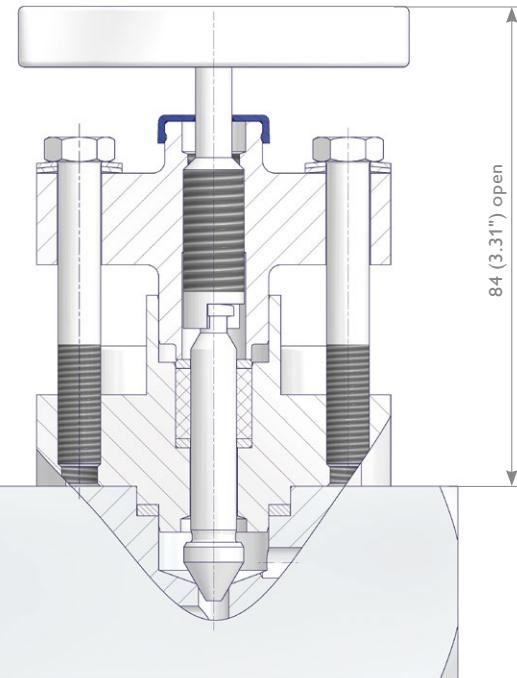

Pressure-Temperature Rating for Standard Valve Head Units acc. to Page 6 – 8

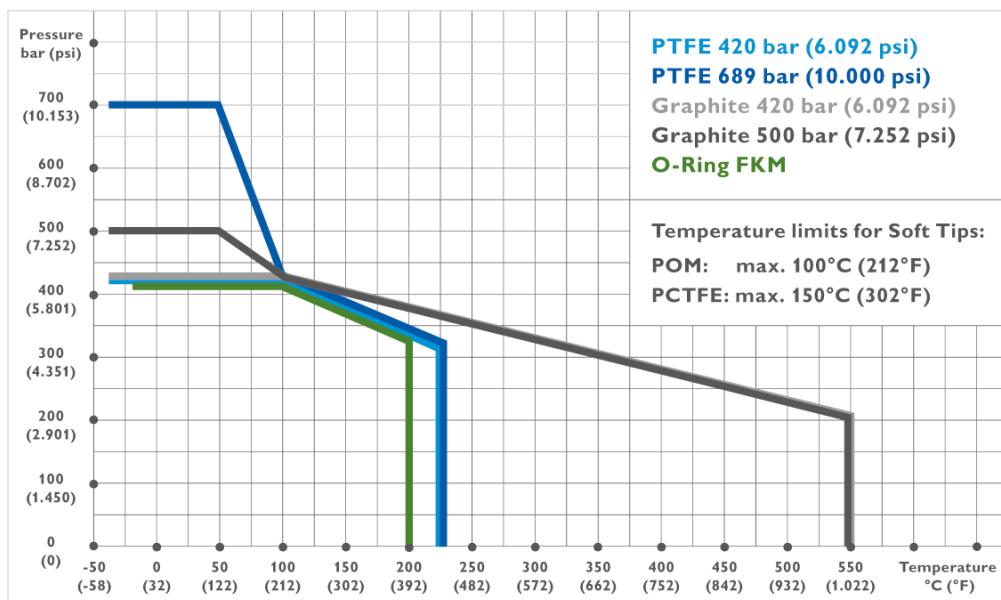

Above-mentioned Pressure-Temperature Rating is based on the standard material 316 stainless steel.

Other materials as shown on page 4 and 6 might have different Pressure-Temperature Ratings.

Low-temperature Limits:

- Standard Valves with PTFE and Graphite Packing: -40°C (-40°F)
- Valves with PTFE Packing and Arctic Operations Option, Code K: -55°C (-67°F)
- Valves with FKM O-Ring Needle Seal: -20°C (-4°F)
- Carbon Steel ASTM A105: -29°C (20.2°F)



Packing adjustment may be required during the service life of the valves.



Valves that have not been cycled for a period of time may have a higher initial actuation torque.

Valve Head Units for Fugitive Emission Applications

Needle Valves acc. to ISO 15848

Screwed Bonnet – Type 1 O-Ring Stem Seal + Graphite Packing
Type 3 PTFE Packing


Features

- Integral Valve Seat – Metal to Metal Seated
- Non-rotating Needle
- External Stem Thread – Packing below stem threads. Stem Threads are protected from process media (non-wetted), helps to prevent stems from galling.
- Stem with cold rolled threads
- Back Seat – Metal to metal secondary needle seal
- Color Coded Dust Cap for operating thread protection
- Max. allowable (Working) Pressure (PS): 420 bar (6,092 psi)
- Anti-Tamper Valve Head Options available
- FKM O-Ring Needle Seal – RGD (Rapid Gas Decompression) resistant
- PTFE or Graphite Packing
- All non-wetted parts in 316 stainless steel
- Types also comply with the requirements of TA-Luft 2002

ISO FE Performance Data

ISO FE Type 1:
Class A 1,500 cycles / -29°C to 40°C
(-20°F to 104°F)
Class A 500 cycles / -29°C to 200°C
(-20°F to 392°F)
Class B 1,500 cycles / -29°C to 200°C
(-20°F to 392°F)

ISO FE Type 3:
Class B 1,500 cycles / -29°C to 200°C
(-20°F to 392°F)

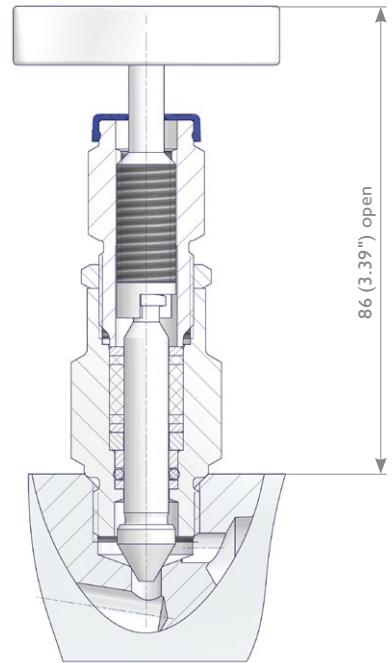

OS&Y Needle Valves acc. to ISO 15848

OS&Y Bolted Bonnet – Type 1 O-Ring Stem Seal + Graphite Packing
Type 3 PTFE Packing


Features

- Integral Valve Seat – Metal to Metal Seated
- Non-rotating Needle
- External Stem Thread – Packing below stem threads. Stem Threads are protected from process media (non-wetted), helps to prevent stems from galling.
- Stem with cold rolled threads
- Blow-out proof Needle
- Spring Washers for compensation of thermal expansion
- Back Seat – Metal to metal secondary stem seal
- Color Coded Dust Cap for operating thread protection
- Max. allowable (Working) Pressure (PS): 420 bar (6,092 psi)
- Anti-Tamper Valve Head Options available
- FKM O-Ring Stem Seal – RGD (Rapid Gas Decompression) resistant
- PTFE or Graphite Packing
- Bonnet Seal Ring: Graphite
- All non-wetted parts in 316 stainless steel
- Types also comply with the requirements of TA-Luft 2002

ISO FE Performance Data

Class A 2,500 cycles / -29°C to 40°C
(-20°F to 104°F)
Class A 500 cycles / -29°C to 200°C
(-20°F to 392°F)
Class B 2,500 cycles / -29°C to 200°C
(-20°F to 392°F)

ISO FE Type 3:
Class B 2,500 cycles / -29°C to 200°C
(-20°F to 392°F)

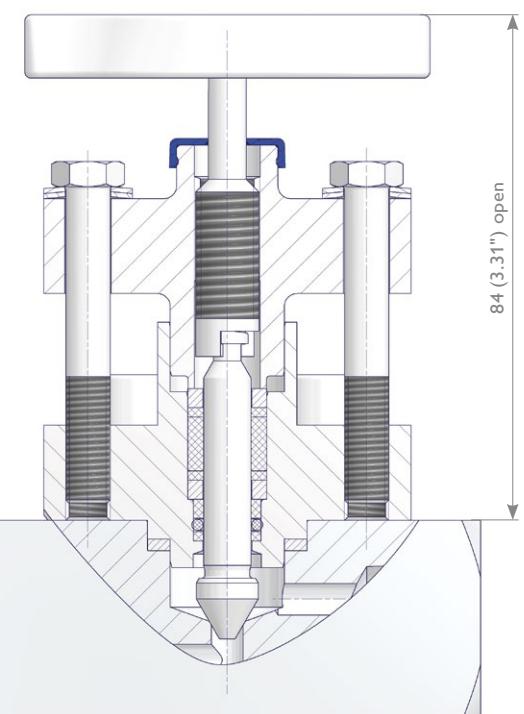

Valve Head Units for Fugitive Emission Applications

Bellows Sealed Head Units

Screwed Bonnet – PN 100 and Graphite Safety Packing
PN 250 and Graphite Safety Packing

Features


- Integral Valve Seat – Metal to Metal Seated
- Non-rotating Stem
- Bellows sealed – PN 100 and PN 250 incl. Graphite Safety Packing
- Stem with cold rolled threads
- Stellite Needle Tip as standard
- Bellows are submitted to a 100% Helium leak test
- Leak rate: 10^{-8} mbar l/s
- Valves for Oxygen Service on request

Bellows Sealed Head Units are mainly used for applications requiring the highest tightness class – such as toxic or vacuum service.

⚠ **Packing adjustment may be required during the service life of the valves.**


⚠ **Valves that have not been cycled for a period of time may have a higher initial actuation torque.**

⚠ **When delivered ex factory, the safety packing of the bellows sealed valve is not fully tightened. In the event of a bellows failure the safety packing must be tightened in order to avoid fluid leakage.**

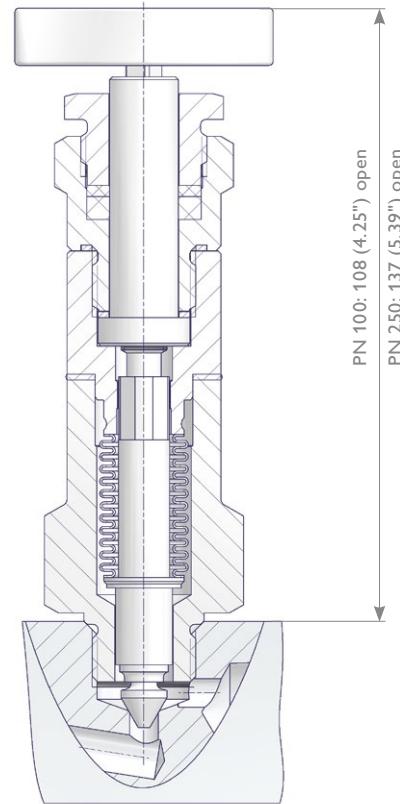


Pressure-Temperature Rating

ISO FE Type 1 FKM O-Ring and Graphite Packing
ISO FE Type 3 PTFE Packing

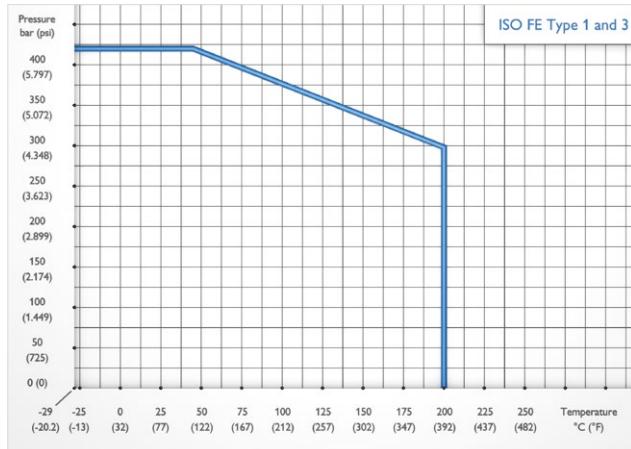

Pressure-Temperature Rating

Bellows PN 100 Safety Packing Graphite
Bellows PN 250 Safety Packing Graphite

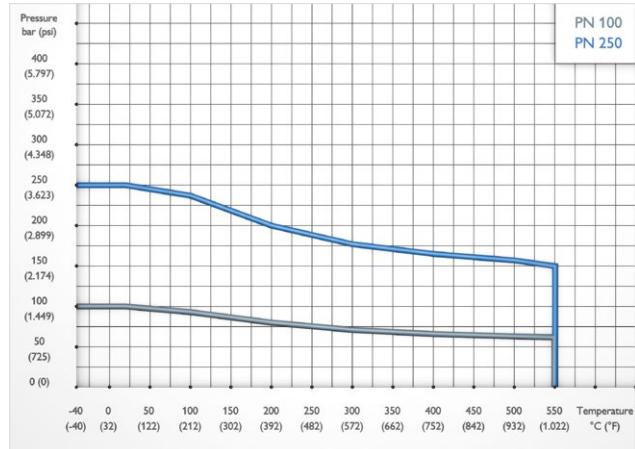

Above-mentioned Pressure-Temperature Rating is based on the standard material 316 stainless steel.

Other materials as shown on page 4 and 6 might have different Pressure-Temperature Ratings.


Valve Head Unit Options

Anti-Tamper Valve Head Unit Options

AS-Schneider is providing 2 Anti-Tamper Valve Head Units, both types are lockable with a padlock.

Standard Anti-Tamper Head Unit


The valves are operated with a special Anti-Tamper Key (AT-Key), which fits exactly in the key guide. The valve can therefore only be operated with the AT-Key. In addition to this safety function, installing a padlock prevents the AT-Key being inserted into the key guide. Operating the valve is therefore no longer possible which protects your equipment against unauthorized opening and closing of the valve head units. The valve can be locked reliably in every position required.

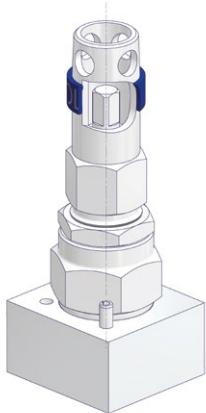

Option Code T or R



Part Number ATK-ES

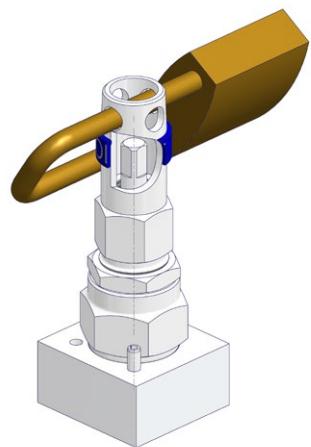


Incl. Padlock; Option Code U

'AT-Key Lock' Anti-Tamper Head Unit (Option Code Q)


'AT-Key Lock' valves are operated by a AT-Key which is an integral component of the valve. This Key can be extracted a little from the valve head unit which loosens the connection between the valve stem and the Key. In this extended position a padlock can now be hooked diagonally in the valve head unit which prevents the Key being inserted again. Operating the valve is therefore no longer possible which protects your equipment against unauthorised opening and closing of the valve. The valve can be locked reliably in every position required. This design offers you optimal security against unintentional and unauthorized operation of the valve. A color coded dust cap protects stem threads against ingress of dirt unauthorized opening and closing of the valve head units. The valve can be locked reliably in every position.

Stainless Steel Handwheel and 'Locking Plate' Design

The valves can be ordered optional with Stainless Steel Handwheel (Option Code W) and also with an additional fitted locking plate (Option Code J). For ordering the 'Locking Plate' Design incl. padlock you need to state J and U. This design allows minimum handle movements and is ideal as protection against unauthorised closing of the valve.

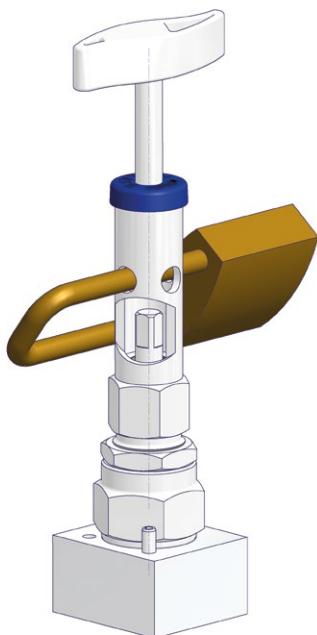


Option Code Q

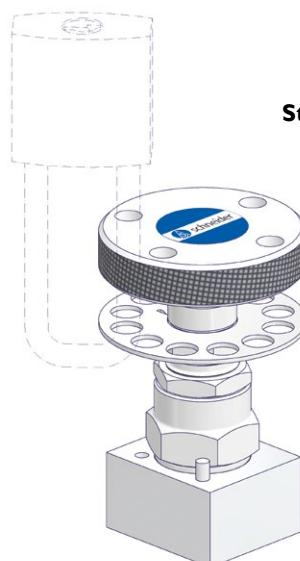

Option Code J

Stainless Steel Handwheel

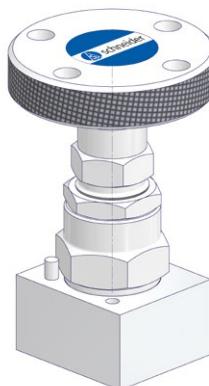

Option Code W

Connections


Connections

AS-Schneider is manufacturing a lot of different connections and connection combinations. In this catalogue we are showing the most popular types. On the next 2 pages you will find the standard connections in detail. If you don't find your option please contact us.


Designations used in the tables: Inlet = Process Connection | Outlet = Instrument / Transmitter Connection

Tube Fittings

Single Ferrule Tube Fittings
acc. to EN ISO 8434-1 Size S




Twin Ferrule Tube Fittings




Tapered Pipe Threads

NPT Male Threads
acc. to ASME B 1.20.1



BSP Tapered Thread
acc. to ISO 7/1 (e.g. R 1/2)

NPT Female Threads
acc. to ASME B 1.20.1




BSP Tapered Thread
acc. to ISO 7/1 (e.g. Rc 1/2)

Parallel Pipe Threads

BSP Parallel Male Thread
acc. to ISO 228 (e.g. G1/2)
acc. to DIN 3852
acc. to EN 837-1




BSP Parallel Female Threads
acc. to ISO 228 (e.g. G 1/2)
acc. to DIN 3852-2 Form Z
acc. to ISO 7/1 (e.g.) R 1/2
acc. to EN 837-1




Weld Ends

Butt Weld Ends for
Pipes and Tubes acc. to
EN12627 / ASME B16.9




Socket Weld Ends for
Pipes and Tubes acc. to
EN12760 / ASME B16.11




Pressure Gauge Connections - For Parallel Pipe Threads only


Swivel Male Connection

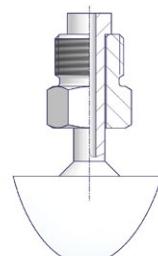


Adjusting Nut
acc. to DIN 16283



Swivel Nut (Wire Design)




Swivel Nut
(Welded Nipple Design)
acc. to DIN 16284

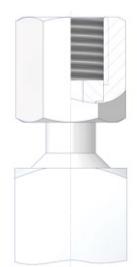

Flange Connections


According to DIN EN 61518 the manifold-transmitter interface is applicable for a max. allowable (Working) Pressure (PS) of 413 bar^{*3} (6,000 psi) and a max. allowable Temperature (TS) of 120°C (248°F) for liquids, gas or vapors. The max. allowable Temperature (TS) of 120°C (248°F) is considering the requirement that manifolds and transmitters need to be protected against heating by hot media. This can be achieved by using adequate hook-ups or by instrument impulse lines with sufficient length. However the AS-Schneider E Series Manifolds can be used for temperatures up to 550°C (1,022°F), PTFE up to 232°C (450°F), Graphite up to 550°C (1,022°F).

Flange Connections – Inlet Manifold respectively Transmitter Connection DIN EN 61518 / IEC 61518

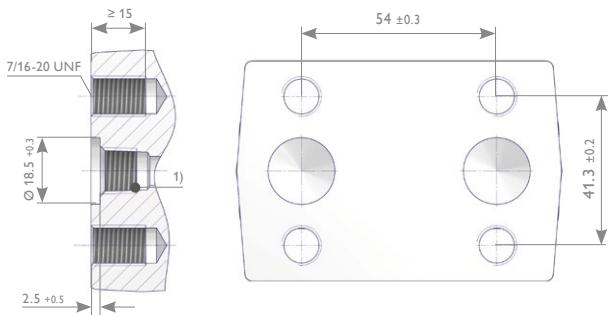

¹⁾ Threaded option for transmitters – plug / vent valve

Flange Connections – Manifold to Transmitter DIN EN 61518 / IEC 61518 Type A and Type B

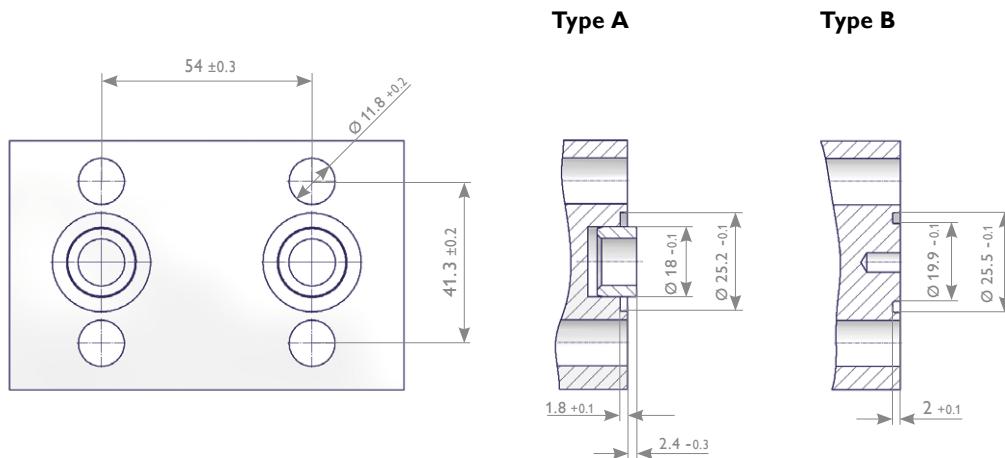

	Connection at the manifold acc. to IEC 61518 / DIN EN 61518 ^{*1 *3}				
	Type A with spigot			Type B without spigot	
Max. allowable (Working) Pressure (PS) in bar (psi)	413 (6,000) ^{*3}			413 (6,000) ^{*3}	
Temperature Range in °C (°F)	-10 to +80 (14 to 176)	-15 to +120 (5 to 248)	-40 to +120 (-40 to 248)	-10 to +80 (14 to 176)	-40 to +120 (-40 to 248)
Seal Ring ^{*2}	Flat Ring 24 x 17.7 x 2.7 Material: PTFE	O-Ring ISO 3601-1 20 x 2.65 Material: FPM (FKM by ASTM)	Flat Ring 25.1 x 18 x 2.9 Material: Graphite	Flat Ring 25.4 x 20 x 2.7 Material: PTFE	Flat Ring 25.4 x 19.9 x 2.9 Material: Graphite
Min. Thread Engagement in mm	9			9	

^{*1} DIN EN 61518 / IEC 61518 | Mating dimensions between pressure measuring instruments and flanged-on shut-off devices up to 413 bar (6,000 psi).

^{*2} Materials and temperature limits for the flat rings and the O-Rings are for reference only. It is the responsibility of the user to ensure compatibility between the selected gasket ring material and the process requirements, such as pressure, temperature, and chemical compatibility.

^{*3} IEC 61518 is stating 413 bar (6,000 psi), AS-Schneider however confirms 420 bar (6,092 psi).


Hand Valves

Hand Valves


AS-Schneider Hand Valves are available with a lot of options. We are showing on this page just the standard types. You find a lot more options on the next page – Ordering Information Hand Valves.

The dimensions shown apply only to the illustrated valves (1/2 NPT Threaded) – if you need the dimensions for your individual type or should you still not find your options at all please contact the factory.


Hand Valve Female x Female Threaded
HAFF Type

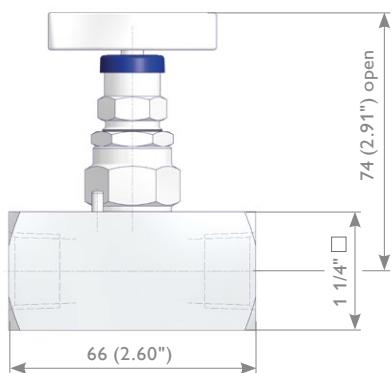


Hand Valve Male x Female Threaded
HAMF Type

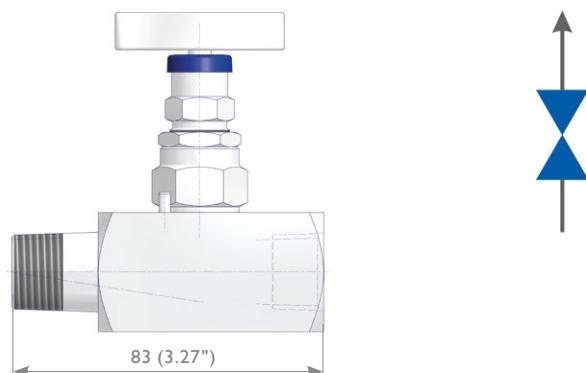


Hand Valve with Integral Tube Fittings
HATT Type

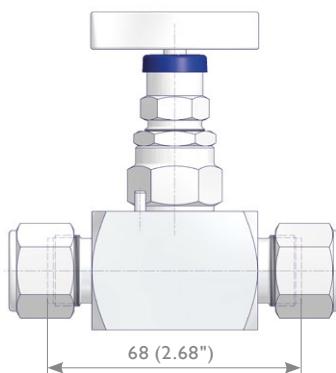


Hand Valve with Extended Body
HXMF Type
Extended by approx. 3"

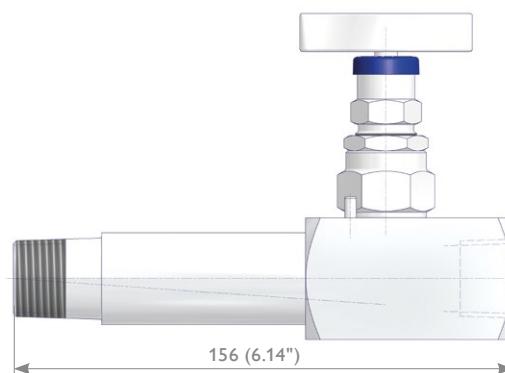

Hand Valve with OS&Y Bolted Bonnet
HFFF Type

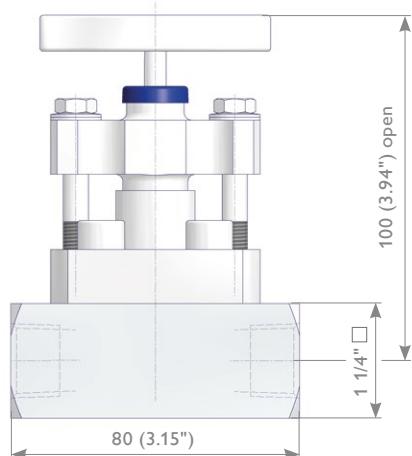

Angle Hand Valve
HLMF Type

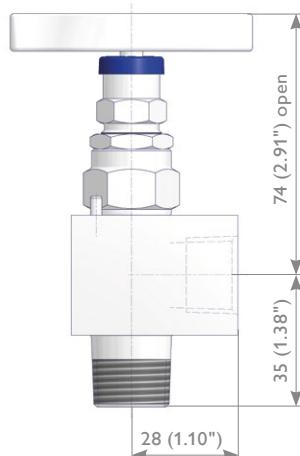

Ordering Information

	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16														
	H	A	T	T	S	A	-	R	4	R	4	-	M	S																
H Hand Valves																														
Basic Design																														
A	Screwed Bonnet	L	Angle Hand Valve (Screwed Bonnet)																											
F	OS&Y Bonnet	X	Extended Body (Screwed Bonnet)																											
Inlet																														
M	Male	B	Butt Weld End																											
F	Female	S	Socket Weld End																											
T	Integral Tube Fitting	A	1/2 NPT with Tube Fitting																											
Outlet																														
M	Male	B	Butt Weld End																											
F	Female	S	Socket Weld End																											
T	Integral Tube Fitting	A	1/2 NPT with Tube Fitting																											
Material																														
S	1.4401 / 1.4404 / 316 / 316L	F	Duplex UNS S31803																											
M	Alloy 400 UNS N04400	D	Super Duplex UNS S32750																											
H	Alloy C-276 UNS N10276	V	Alloy 625 UNS N06625																											
Bonnet																														
A	PTFE	K	O-Ring FKM (FPM by ISO)																											
B	Graphite	WV	Carbon filled PTFE – TA-Luft																											
D	ISO FE Series Type 1	2	Bellows sealed PN 100																											
E	ISO FE Series Type 3	4	Bellows sealed PN 250																											
Inlet																														
Thread Type			Fitting Type			Butt Weld End			Socket Weld End																					
N	NPT	C	Single Ferrule Tube Fitting			4 1/2" Pipe			D For 12 mm Tube (Ø 12.2 mm)																					
H	BSP Parallel (G) – DIN 3852-2	K	Twin Ferrule Tube Fitting			6 3/4" Pipe			E For 14 mm Tube (Ø 14.25 mm)																					
R	BSP Taper (R/Rc) – ISO 7/1					D 12 mm			2 For 1/4" Pipe																					
						E 14 mm																								
Inch Sizes			Tube Fitting Sizes			Wall Thickness Butt Weld			Socket Weld																					
2	1/4	1	6 resp. 6S			P Schedule 80																								
4	1/2	2	8 resp. 8S			Q Schedule 160																								
6	3/4	3	10 resp. 10S			2 2.0 mm			8 2.6 mm																					
		4	12 resp. 12S			A 3.2 mm																								
		5	7 1/4"																											
		6	8 3/8"																											
		7	9 1/2"																											
Outlet																														
Thread Type			Fitting Type			Butt Weld End			Socket Weld End																					
N	NPT	C	Single Ferrule Tube Fitting			4 1/2" Pipe			D For 12 mm Tube (Ø 12.2 mm)																					
H	BSP Parallel (G) - DIN 3852	K	Twin Ferrule Tube Fitting			6 3/4" Pipe			E For 14 mm Tube (Ø 14.25 mm)																					
R	BSP Taper (R/Rc) - ISO 7/1					D 12 mm			2 For 1/4" Pipe																					
						E 14 mm																								
Inch Sizes			Tube Fitting Sizes			Wall Thickness Butt Weld			Socket Weld																					
2	1/4	1	6 resp. 6S			P Schedule 80																								
4	1/2	2	8 resp. 8S			Q Schedule 160																								
6	3/4	3	10 resp. 10S			2 2.0 mm			8 2.6 mm																					
		4	12 resp. 12S			A 3.2 mm																								
		5	7 1/4"																											
		6	8 3/8"																											
		7	9 1/2"																											
Options - Specify in alphabetical order (digits first, then letters)																														
B	Cleaned and Lubricated for Oxygen Service – For PTFE Packing only																													
F	PCTFE Soft Tip																													
G	POM Soft Tip																													
S	Stellite Valve Tip																													
H	10,000 psi (689 bar) for PTFE Packing 7,252 psi (500 bar) for Graphite Packing																													
P	Power Piping ASME B31.1 – For Graphite Packing only																													
K	Arctic Operations (-55°C (-67°F)) – For PTFE Packing only																													
M	Wetted Parts with 3.1 certificate																													
C	Panel Mounting																													
Operation Options																														
J	Stainless Steel Handwheel with Locking Plate Design																													
T	Anti-Tamper Bonnet (Key to be ordered separately)																													
R	Anti-Tamper Bonnet (1 Key supplied per Valve/Manifold)																													
Q	AT-Key Lock Bonnet Design																													
U																														

Gauge Valves


Gauge Valves

AS-Schneider Gauge Valves are designed for mounting to Pressure Gauges, Pressure Transmitters and Pressure Switches. The standard types are equipped with a bleed screw. We are showing on this page just the standard types.



You find a lot more options on the next page – Ordering Information Gauge Valves. Accessories like Swivel Gauge Adaptors, Vent Valves etc. see Pages 48-53.

The dimensions shown apply only to the illustrated valves (1/2 NPT / G 1/2 Threaded) – if you need the dimensions for your individual type or should you still not find your options at all please contact the factory.


Gauge Valve Female x Female Threaded
GSFF Type

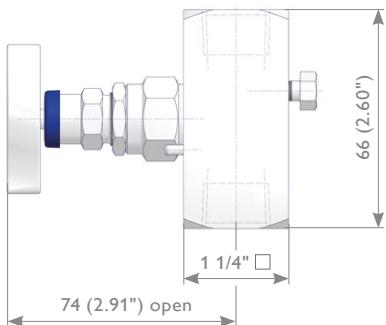


Gauge Valve Male x Female Threaded
GSMF Type

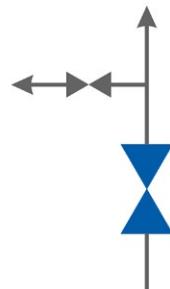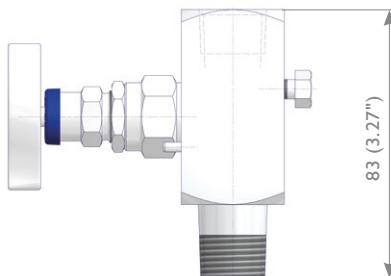


Gauge Valve Male x Male Threaded
GSMM Type

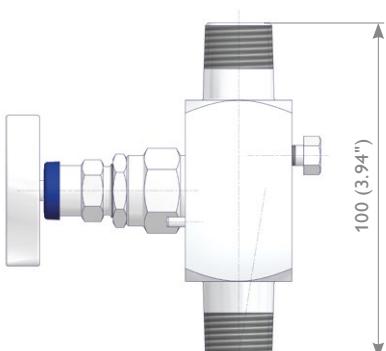

Gauge Valve Male x Adjusting Nut
GSMG Type

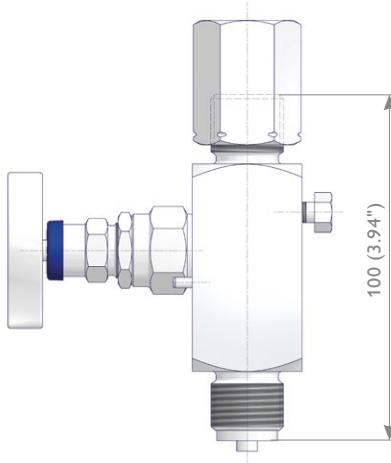

Gauge Valve Male x Female Threaded
GAMF Type

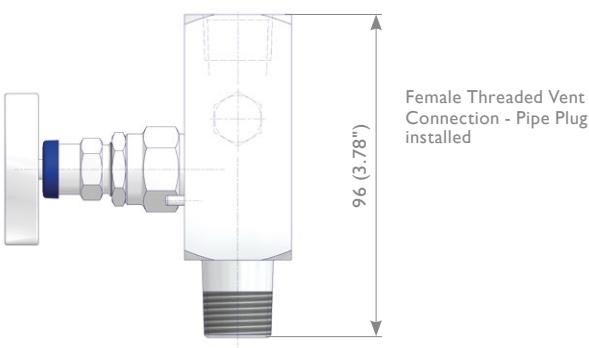

Mounting Bracket
AKM-S Type
See also Page 48.



Ordering Information

			1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
			G	S	M	F	S	B	-	N	4	N	4	-	M			
G	Gauge Valves																	
Vent Connection																		
S	Bleed Screw	C	G 1/4 Female															
A	1/4 NPT Female	D	G 1/2 Female															
Inlet																		
M	Male	B	Butt Weld End															
F	Female	S	Socket Weld End															
T	Integral Tube Fitting	A	1/2 NPT with Tube Fitting															
Outlet																		
M	Male	G	Adjusting Nut (For Connection Code G2, G4 and M4 only)															
F	Female	D	Swivel Nut [Wire Design] (For Connection Code G2, G4 and M4 only)															
Material																		
S	1.4401 / 1.4404 / 316 / 316L	F	Duplex UNS S31803	B	6Mo UNS S31254													
M	Alloy 400 UNS N04400	D	Super Duplex UNS S32750	T	Titanium Grade 2													
H	Alloy C-276 UNS N10276	V	Alloy 625 UNS N06625															
Bonnet																		
A	PTFE	K	O-Ring FKM (FPM by ISO)															
B	Graphite	W	Carbon filled PTFE – TA-Luft															
D	ISO FE Series Type 1	2	Bellows sealed PN 100															
E	ISO FE Series Type 3	4	Bellows sealed PN 250															
Inlet																		
Thread Type		Fitting Type		Butt Weld End		Socket Weld End												
N	NPT	C	Single Ferrule Tube Fitting	4	1/2" Pipe	D	For 12 mm Tube (Ø 12.2 mm)											
G	BSP Parallel (G) – EN 837-1	K	Twin Ferrule Tube Fitting	6	3/4" Pipe	E	For 14 mm Tube (Ø 14.25 mm)											
H	BSP Parallel (G) – DIN 3852			D	12 mm	2	For 1/4" Pipe											
R	BSP Taper (R/Rc) – ISO 7/1			E	14 mm													
M	Metric similar to EN 837-1																	
Inch Sizes		Tube Fitting Sizes		Wall Thickness Butt Weld		Socket Weld												
2	1/4	4	12 resp. 12S	P	Schedule 80													
4	1/2	5	14 resp. 14S	Q	Schedule 160													
6	3/4	9	1/2"	2	2.0 mm													
				8	2.6 mm													
				A	3.2 mm													
Metric Size																		
4	M 20x1.5																	
Outlet																		
Male / Female Thread Sizes		Thread Sizes EN 837-1 - Female Threads only																
N2	1/4 NPT Female Thread only	G2	G 1/4 (1/4 BSP P)															
N4	1/2 NPT	G4	G 1/2 (1/2 BSP P)															
R4	R/Rc 1/2 – ISO 7/1 (1/2 BSPT)	M4	M 20x1.5															
Options - Specify in alphabetical order (digits first, then letters)																		
B	Cleaned and Lubricated for Oxygen Service – For PTFE Packing only																	
F	PCTFE Soft Tip																	
G	POM Soft Tip																	
S	Stellite Valve Tip																	
H	10,000 psi (689 bar) for PTFE Packing 7,252 psi (500 bar) for Graphite Packing																	
P	Power Piping ASME B31.1 - For Graphite Packing only																	
K	Arctic Operations (-55°C (-67°F)) – For PTFE Packing only																	
M	Wetted Parts with 3.1 certificate																	
C	Panel Mounting																	
Operation Options																		
J	Stainless Steel Handwheel with Locking Plate Design																	
T	Anti-Tamper Bonnet (Key to be ordered separately)																	
R	Anti-Tamper Bonnet (1 Key supplied per Valve/Manifold)																	
Q	AT-Key Lock Bonnet Design																	
U	Padlock for Anti-Tamper Bonnet / AT-Key Lock Bonnet Design																	
W	Stainless Steel Handwheel																	
Accessory Kits																		
8	SST Mounting Bracket AKM-S Type for 2" Pipe Mounting supplied separately – For Vertical Impulse Piping Installations																	

Wetted Parts according to above mentioned material list are supplied according to NACE MR0175/MR0103 and ISO 15156 (latest issue) - except Titanium Grade 2. Note: Not every configuration which can be created in the ordering information is feasible / available.

Multiport Gauge Valves

Multiport Gauge Valves

AS-Schneider Multiport Gauge Valves are designed for mounting to Pressure Gauges, Pressure Transmitters and Pressure Switches. The standard types are provided with 3 female outlet ports and are therefore suitable for vertical or horizontal installations.

Accessories like Pipe Plugs and Vent Valves can be ordered separately or already factory installed – see also options next page – Ordering Information Multiport Gauge Valves. Accessories like Swivel Gauge Adaptors, Vent Valves etc. see Pages 48-53.

The dimensions shown apply only to the illustrated valves (1/2 NPT Threaded) – if you need the dimensions for your individual type or should you still not find your options at all please contact the factory.

Multiport Gauge Valve – Screwed Bonnet


MAMA Type



Multiport Gauge Valve with Extended Body

MXBA Type

Extended by approx. 3"

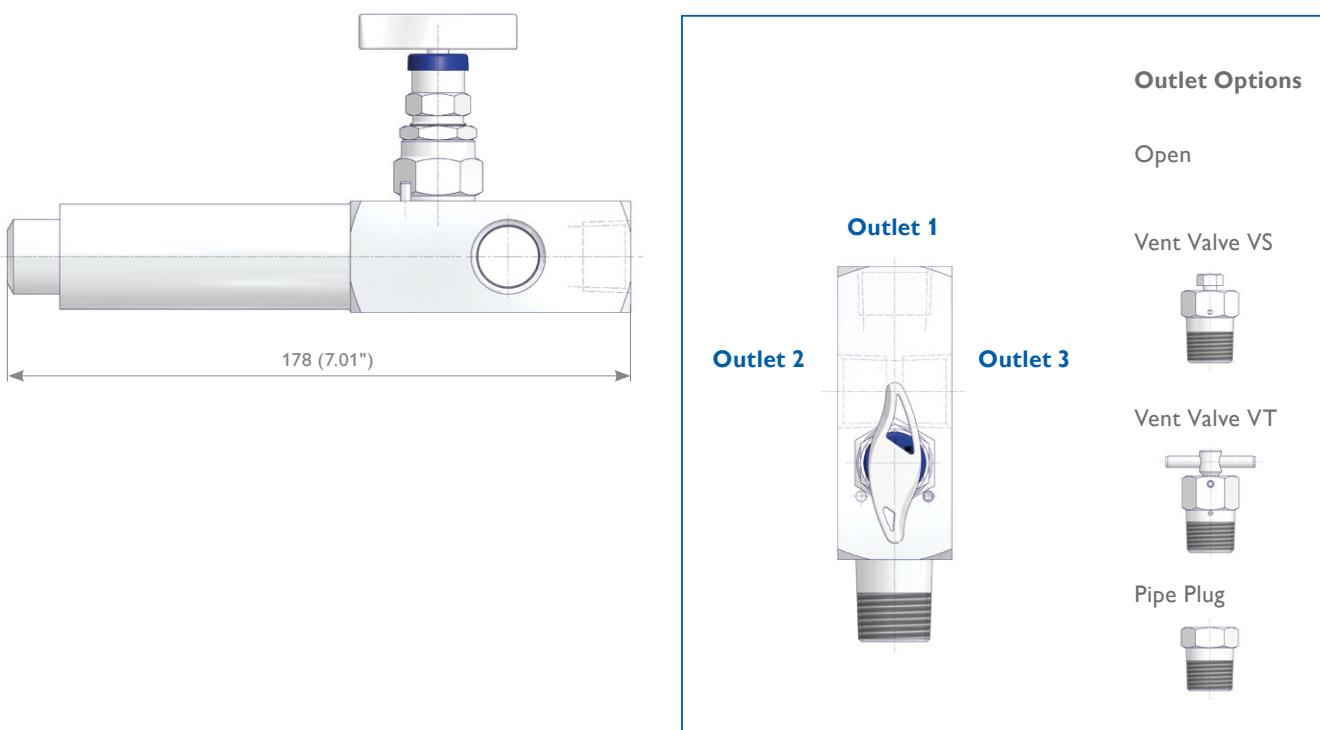

Multiport Gauge Valves

Ordering Information

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16														
M	A	B	B	S	A	-	6	P	N	4	-	S																	
M Multiport Gauge Valves																													
Basic Design																													
A Screwed Bonnet F OS&Y Bonnet X Extended Body (Screwed Bonnet)																													
Inlet																													
M Male	B	Butt Weld End																											
F Female	S	Socket Weld End																											
Outlet																													
A 3 x Female	B	Outlet 1 – Female, Outlet 2 – Pipe Plug, Outlet 3 – Vent Valve VS																											
B	C	Outlet 1 – Female, Outlet 2 – Pipe Plug, Outlet 3 – Vent Valve VT																											
D		Outlet 1 – Female, Outlet 2 and 3 – Pipe Plug																											
Material																													
S 1.4401 / 1.4404 / 316 / 316L	F	Duplex UNS S31803	B	6Mo UNS S31254																									
M Alloy 400 UNS N04400	D	Super Duplex UNS S32750	T	Titanium Grade 2																									
H Alloy C-276 UNS N10276	V	Alloy 625 UNS N06625																											
Bonnet																													
A PTFE	K	O-Ring FKM (FPM by ISO)																											
B Graphite	W	Carbon filled PTFE – TA-Luft																											
D ISO FE Series Type 1	2	Bellows sealed PN 100																											
E ISO FE Series Type 3	4	Bellows sealed PN 250																											
Inlet																													
Thread Type		Butt Weld End																											
N NPT	4	1/2" Pipe																											
H BSP Parallel (G) – DIN 3852	6	3/4" Pipe																											
Inch Sizes		Wall Thickness Butt Weld																											
2 1/4	P	Schedule 80																											
4 1/2	Q	Schedule 160																											
6 3/4	4	4.0 mm																											
Outlet																													
Thread Sizes - Female Threads only																													
N2 1/4 NPT	H4	G 1/2 (1/2 BSP P) – DIN 3852																											
N4 1/2 NPT																													
Options - Specify in alphabetical order (digits first, then letters)																													
B	Cleaned and Lubricated for Oxygen Service – For PTFE Packing only																												
F	PCTFE Soft Tip																												
G	POM Soft Tip																												
S	Stellite Valve Tip																												
H	10,000 psi (689 bar) for PTFE Packing 7,252 psi (500 bar) for Graphite Packing																												
P	Power Piping ASME B31.1 – For Graphite Packing only																												
K	Arctic Operations (-55°C (-67°F)) – For PTFE Packing only																												
M	Wetted Parts with 3.1 certificate																												
Operation Options																													
J	Stainless Steel Handwheel with Locking Plate Design																												
T	Anti-Tamper Bonnet (Key to be ordered separately)																												
R	Anti-Tamper Bonnet (1 Key supplied per Valve/Manifold)																												
Q	AT-Key Lock Bonnet Design																												
U	Padlock for Anti-Tamper Bonnet / AT-Key Lock Bonnet Design																												
W	Stainless Steel Handwheel																												

Wetted Parts according to above mentioned material list are supplied according to NACE MR0175/MR0103 and ISO 15156 (latest issue) - except Titanium Grade 2.
Note: Not every configuration which can be created in the ordering information is feasible / available.

Block & Bleed and Double Block & Bleed Manifolds


Block & Bleed and Double Block & Bleed Manifolds

AS-Schneider Block & Bleed and Double Block & Bleed Manifolds are designed for mounting to Pressure Gauges, Pressure Transmitters and Pressure Switches. The standard vent connection is 1/4 NPT female. Pipe plugs are not installed as standard. For plugged vent ports (factory installed) – see also options next page – Ordering Information Block & Bleed Manifolds. Accessories like Swivel Gauge Adaptors, Vent Valves etc. see Pages 48-53.



The dimensions shown apply only to the illustrated valves (1/2 NPT Threaded) – if you need the dimensions for your individual type or should you still not find your options at all please contact the factory.

Block & Bleed Manifolds – Female Threaded Instrument Connection

SAFF Type

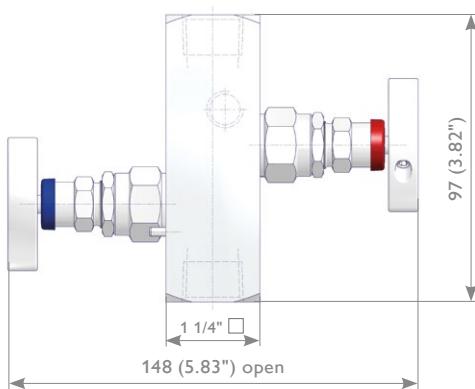


SAMF Type

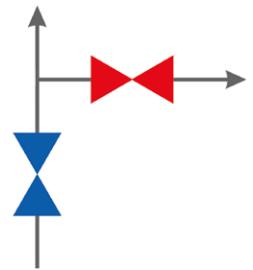
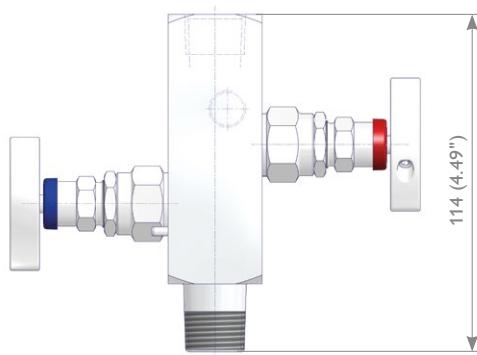


Double Block & Bleed Manifolds – Female Threaded Instrument Connection

CAFF Type

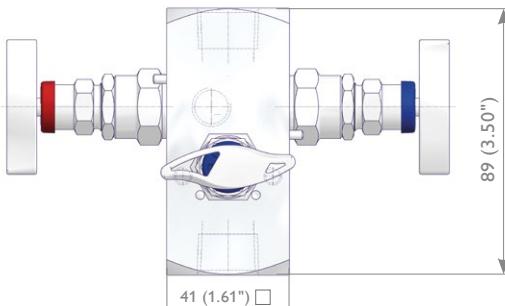

CAMF Type

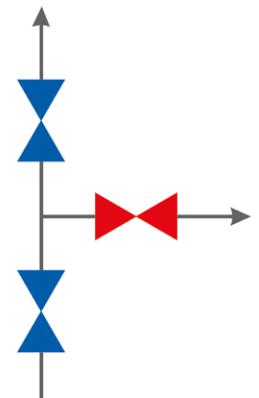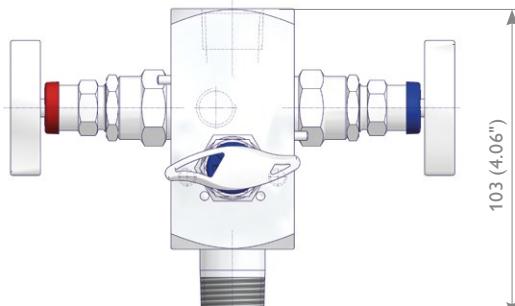

Mounting Bracket
AKM-G Type

See also Page 48.



Mounting Bracket
AKM-S Type

See also Page 48.



Block & Bleed and Double Block & Bleed Manifolds

Ordering Information

			1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
S	Block & Bleed Manifolds		S	A	M	F	M	A	-	N	4	N	4	-	9	Q	U	
C	Double Block & Bleed Manifolds																	
	Vent Connection																	
A	1/4 NPT Female	C	G 1/4 Female															
B	1/2 NPT Female	D	G 1/2 Female															
	Inlet																	
M	Male	B	Butt Weld End															
F	Female	S	Socket Weld End															
T	Integral Tube Fitting	A	1/2 NPT with Tube Fitting															
	Outlet																	
M	Male	G	Adjusting Nut (For Connection Code G2, G4 and M4 only)															
F	Female	D	Swivel Nut [Wire Design] (For Connection Code G2, G4 and M4 only)															
	Material																	
S	1.4401 / 1.4404 / 316 / 316L	F	Duplex UNS S31803	B	6Mo UNS S31254													
M	Alloy 400 UNS N04400	D	Super Duplex UNS S32750	T	Titanium Grade 2													
H	Alloy C-276 UNS N10276	V	Alloy 625 UNS N06625															
	Bonnet																	
A	PTFE	K	O-Ring FKM (FPM by ISO)															
B	Graphite	WV	Carbon filled PTFE – TA-Luft															
D	ISO FE Series Type 1	2	Bellows sealed PN 100															
E	ISO FE Series Type 3	4	Bellows sealed PN 250															
	Inlet																	
	Thread Type		Fitting Type			Butt Weld End				Socket Weld End								
N	NPT	C	Single Ferrule Tube Fitting	4	1/2" Pipe	D	For 12 mm Tube (Ø 12.2 mm)											
G	BSP Parallel (G) – EN 837-1	K	Twin Ferrule Tube Fitting	6	3/4" Pipe	E	For 14 mm Tube (Ø 14.25 mm)											
H	BSP Parallel (G) – DIN 3852			D	12 mm	2	For 1/4" Pipe											
R	BSP Taper (R/Rc) – ISO 7/1			E	14 mm													
M	Metric similar to EN 837-1																	
	Inch Sizes		Tube Fitting Sizes			Wall Thickness Butt Weld	A		Socket Weld									
2	1/4	4	12 resp. 12S	P	Schedule 80													
4	1/2	5	14 resp. 14S	Q	Schedule 160													
6	3/4	9	1/2"	2	2.0 mm													
				8	2.6 mm													
				A	3.2 mm													
	Metric Size																	
4	M 20x1.5																	
	Outlet																	
	Male / Female Thread Sizes					Thread Sizes EN 837-1 - Female Threads only												
N2	1/4 NPT Female Thread only			G2	G 1/4 (1/4 BSP P)													
N4	1/2 NPT			G4	G 1/2 (1/2 BSP P)													
R4	R/Rc 1/2 – ISO 7/1 (1/2 BSPT) Female Thread only			M4	M 20x1.5													
	Options - Specify in alphabetical order (digits first, then letters)																	
B	Cleaned and Lubricated for Oxygen Service – For PTFE Packing only																	
F	PCTFE Soft Tip																	
G	POM Soft Tip																	
S	Stellite Valve Tip																	
A	Vent Ports Plugged																	
H	10,000 psi (689 bar) for PTFE Packing I 7,252 psi (500 bar) for Graphite Packing																	
P	Power Piping ASME B31.1 – For Graphite Packing only																	
K	Arctic Operations (-55°C (-67°F)) – For PTFE Packing only																	
M	Wetted Parts with 3.1 certificate																	
	Operation Options																	
J	Stainless Steel Handwheel with Locking Plate Design																	
T	Anti-Tamper Bonnet (Key to be ordered separately)																	
R	Anti-Tamper Bonnet (1 Key supplied per Valve/Manifold)																	
Q	AT-Key Lock Bonnet Design																	
U	Padlock for Anti-Tamper Bonnet / AT-Key Lock Bonnet Design																	
W	Stainless Steel Handwheel																	
	Accessory Kits																	
8	SST Mounting Bracket AKM-S Type for 2" Pipe Mounting supplied separately – For Vertical Impulse Piping Installations of Block & Bleed Manifolds Type S																	
9	SST Mounting Bracket AKM-G Type for 2" Pipe Mounting supplied separately – For Vertical Impulse Piping Installations of Double Block & Bleed Manifolds Type C																	

Wetted Parts according to above mentioned material list are supplied according to NACE MR0175/MR0103 and ISO 15156 (latest issue) - except Titanium Grade 2.
Note: Not every configuration which can be created in the ordering information is feasible / available.


L, Y & W-Shaped Manifolds

L, Y & W-Shaped Manifolds


AS-Schneider L, Y & W-Shaped Manifolds are designed for mounting to Pressure Gauges, Pressure Transmitters and Pressure Switches. The standard vent connection is 1/4 NPT female. Pipe plugs are not installed as standard. For plugged vent ports (factory installed) – see also options Page 24 – Ordering Information L, Y & W-Shaped Manifolds. Accessories like Swivel Gauge Adaptors, Vent Valves etc. see Pages 48-53.

The dimensions shown apply only to the illustrated valves (1/2 NPT Threaded) – if you need the dimensions for your individual type or should you still not find your options at all please contact the factory.

L-Shaped Manifolds

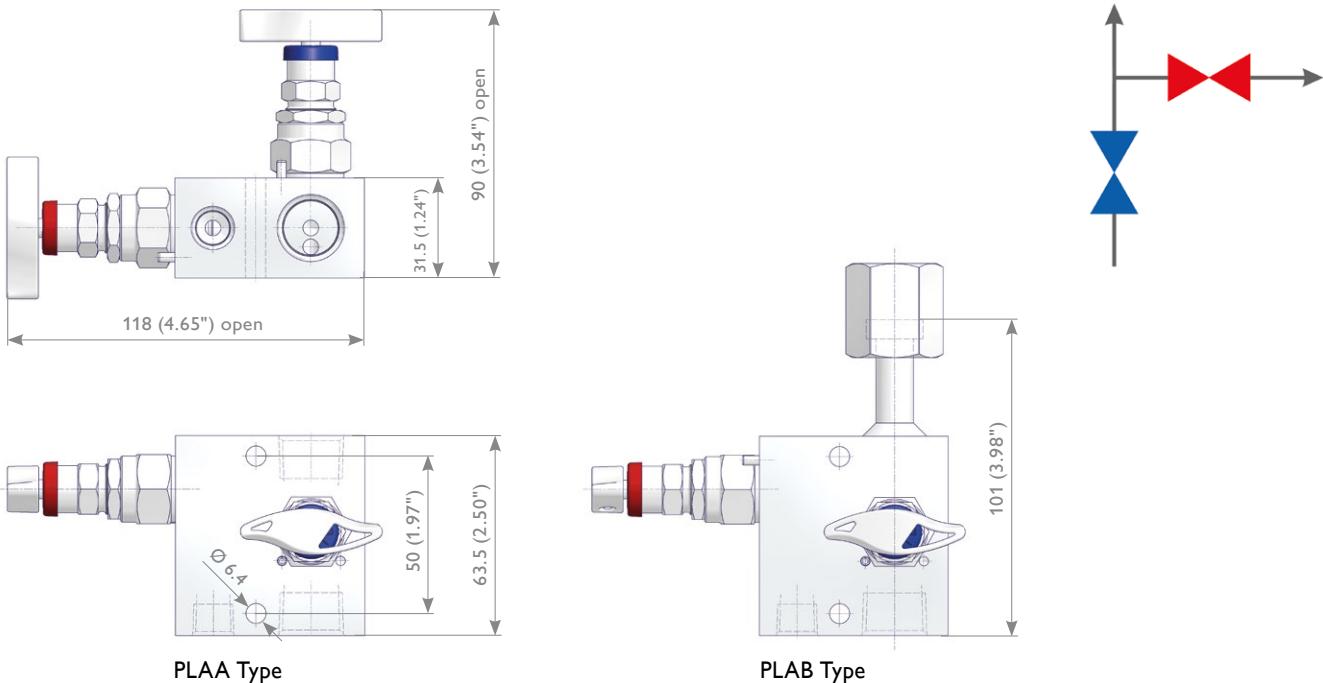




Y-Shaped Manifolds

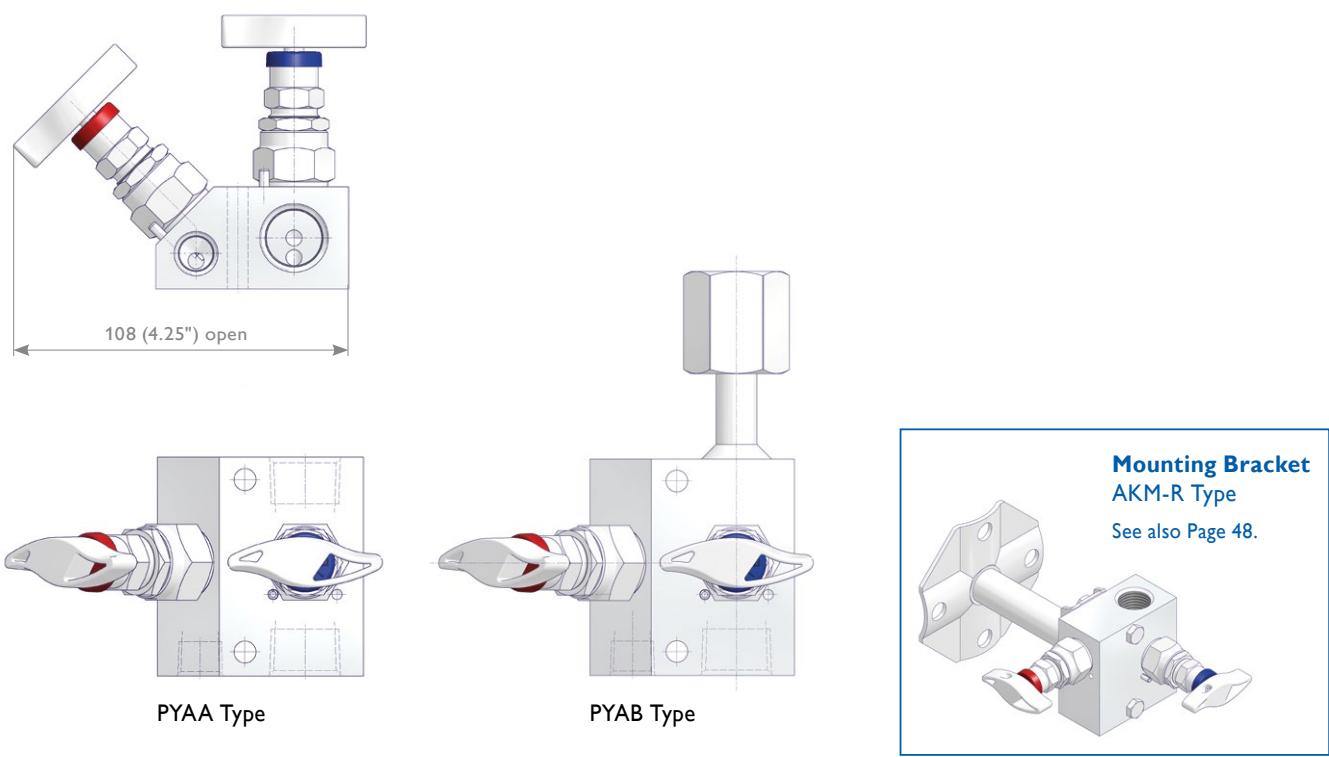


L, Y & W-Shaped Manifolds

W-Shaped Manifolds

PWAA Type

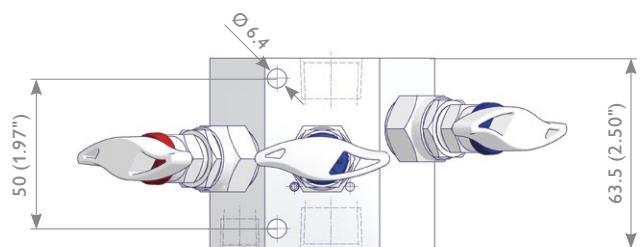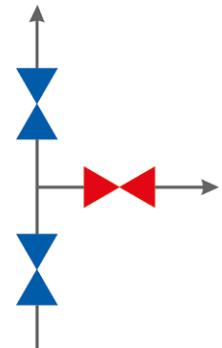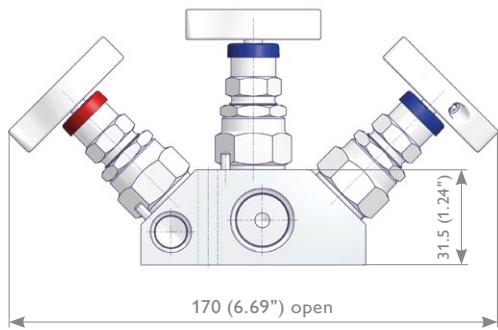

Mounting Bracket
AKM-R Type
See also Page 48.

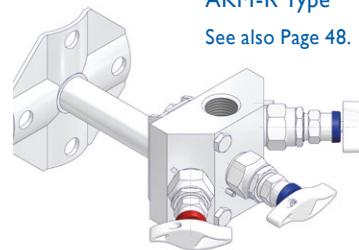

L, Y & W-Shaped Manifolds

Ordering Information

	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
	P	L	A	B	S	A	-	N	4	G	4	-	A	M	S	
P L,Y & W-Shaped Manifolds																
Manifold Type																
L L-Shaped Bonnet Orientation																
Y Y-Shaped Bonnet Orientation																
W W-Shaped Bonnet Orientation → Double Block & Bleed Type																
Vent Connection																
A	1/4 NPT Female	F	1/4 NPT with Tube Fitting 6 mm													
B	1/2 NPT Female – Only Type PL...	G	1/4 NPT with Tube Fitting 12 mm													
C	G 1/4 Female	H	G 1/4 with Tube Fitting 6 mm													
D	G 1/2 Female – Only Type PL...	J	G 1/4 with Tube Fitting 12 mm													
			Tube Fitting Brand see inlet/outlet													
Inlet x Outlet Configuration																
A	Female x Female	E	G 1/2 with Tube Fitting x Female													
B	Female x Swivel Nut	F	G 1/2 with Tube Fitting x Swivel Nut													
C	1/2 NPT with Tube Fitting x Female															
D	1/2 NPT with Tube Fitting x Swivel Nut															
Material																
S	1.4401 / 1.4404 / 316 / 316L	F	Duplex UNS S31803	B	6Mo UNS S31254											
M	Alloy 400 UNS N04400	D	Super Duplex UNS S32750	T	Titanium Grade 2											
H	Alloy C-276 UNS N10276	V	Alloy 625 UNS N06625													
Bonnet																
A	PTFE	K	O-Ring FKM (FPM by ISO)													
B	Graphite	W	Carbon filled PTFE – TA-Luft													
D	ISO FE Series Type 1	2	Bellows sealed PN 100													
E	ISO FE Series Type 3	4	Bellows sealed PN 250													
Inlet																
Thread Type		Fitting Type														
N	NPT	C	Single Ferrule Tube Fitting													
H	BSP Parallel (G) – DIN 3852	K	Twin Ferrule Tube Fitting													
Thread Size		Tube Fitting Sizes														
2	1/4	4	12 resp. 12S													
4	1/2	9	1/2"													
Outlet																
Thread Type																
N4	1/2 NPT Female															
G4	G 1/2 Swivel Nut															
M4	M20 x 1.5 Swivel Nut															
Options - Specify in alphabetical order (digits first, then letters)																
B	Cleaned and Lubricated for Oxygen Service – For PTFE Packing only															
F	PCTFE Soft Tip															
G	POM Soft Tip															
S	Stellite Valve Tip															
A	Vent Ports Plugged															
H	10,000 psi (689 bar) for PTFE Packing 7,252 psi (500 bar) for Graphite Packing															
P	Power Piping ASME B31.1 – For Graphite Packing only															
K	Arctic Operations (-55°C (-67°F)) – For PTFE Packing only															
M	Wetted Parts with 3.1 certificate															
Operation Options																
J	Stainless Steel Handwheel with Locking Plate Design															
T	Anti-Tamper Bonnet (Key to be ordered separately)															
R	Anti-Tamper Bonnet (1 Key supplied per Valve/Manifold)															
Q	AT-Key Lock Bonnet Design															
U	Padlock for Anti-Tamper Bonnet / AT-Key Lock Bonnet Design															
W	Stainless Steel Handwheel															
Accessory Kits																
8	SST Mounting Bracket AKM-R Type for 2" Pipe Mounting supplied separately – For Vertical Impulse Piping Installations															

Wetted Parts according to above mentioned material list are supplied according to NACE MR0175/MR0103 and ISO 15156 (latest issue) - except Titanium Grade 2.
Note: Not every configuration which can be created in the ordering information is feasible / available.

Remote Mounted Manifolds


Remote Mounted Manifolds (2, 3 and 5 Valve Manifolds)

AS-Schneider Remote Mounted Manifolds are designed for remote installation from Pressure Instruments and Differential Pressure Transmitters. The standard vent connection is 1/4 NPT female. Pipe plugs are not installed as standard to 2 and 5 Valve Manifolds. For plugged vent ports (factory installed) - see also options Page 27 – Ordering Information Remote Mounted Manifolds. The standard type of 3 Valve Manifolds is the one without vent connection. The 3 Valve Manifolds with vent connection are supplied with installed pipe plugs as standard. Accessories like Mounting Brackets, Swivel Gauge Adaptors, Pipe Plugs etc. see also Pages 48-53.

The dimensions shown apply only to the illustrated valves (1/2 NPT Threaded) – if you need the dimensions for your individual type or should you still not find your options at all please contact the factory.


2 Valve Manifolds, Remote Mounted

R2AA Type

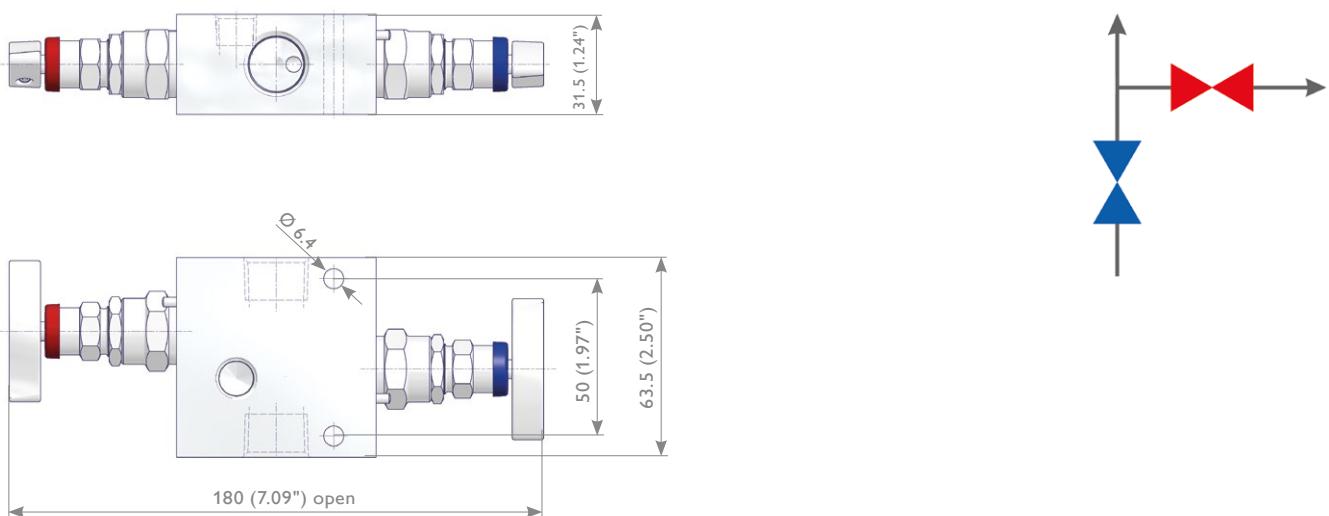



3 Valve Manifolds, Remote Mounted without Vent Connection

R3AA Type

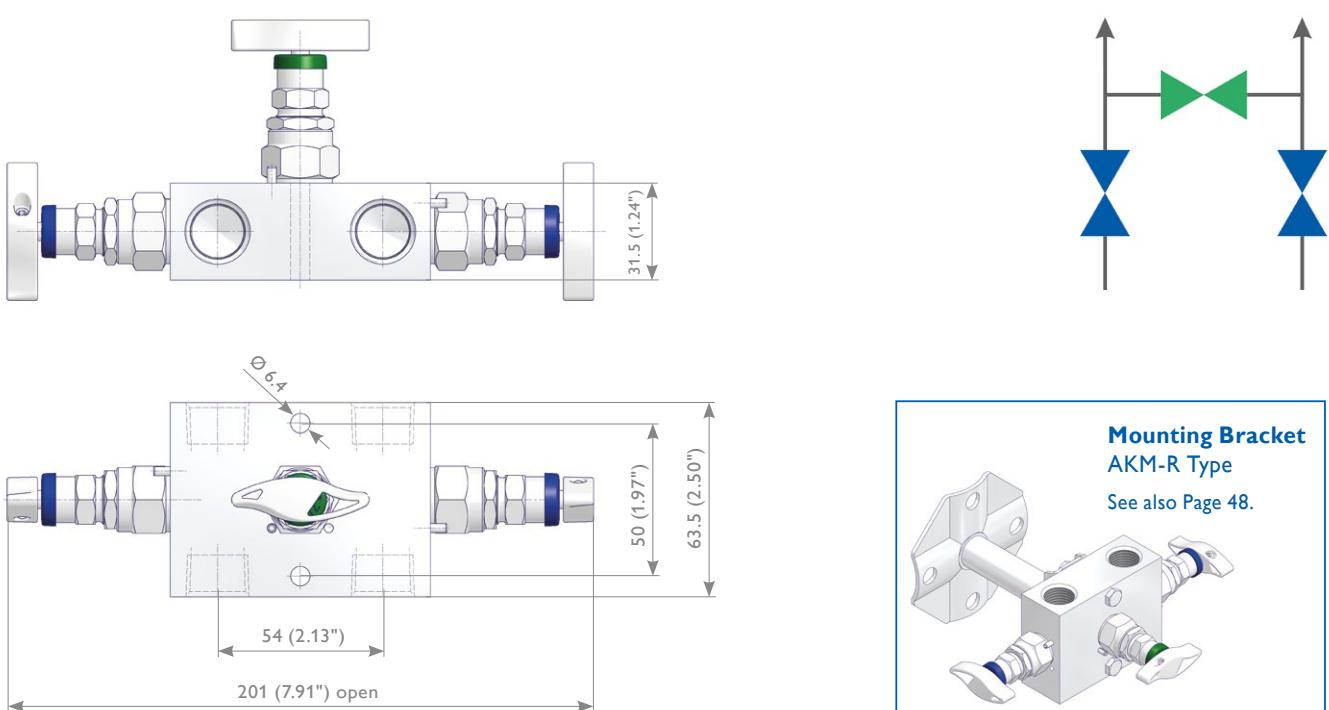



Remote Mounted Manifolds

3 Valve Manifolds, Remote Mounted with Vent Connection 1/4 NPT Female R3BA Type

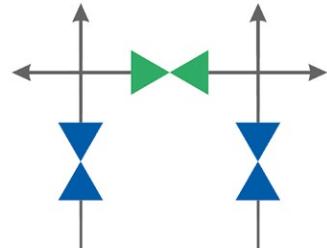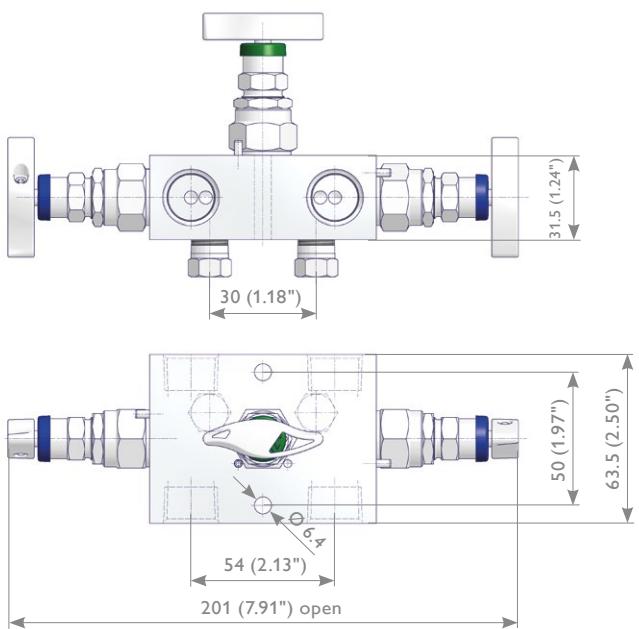


AKM-R Type Mounting Bracket not suitable.


5 Valve Manifolds, Remote Mounted R5AA Type

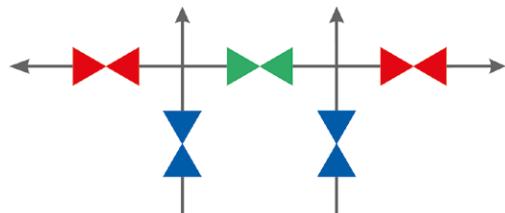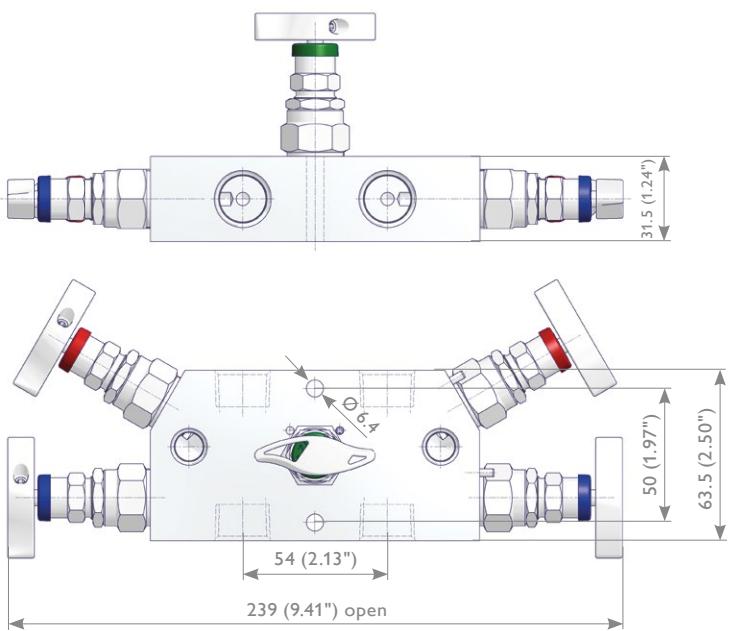

Vent Ports on Process Side R5GA Type

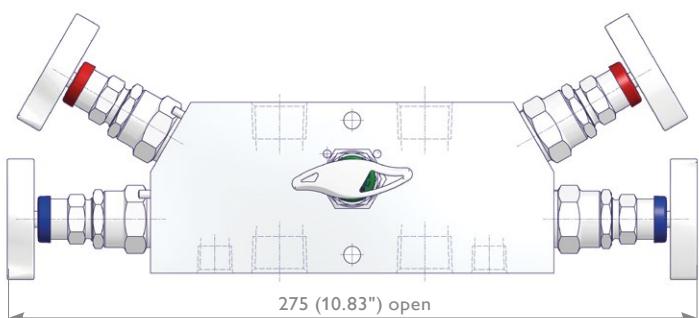

**Mounting Bracket
AKM-R Type**
See also Page 48.

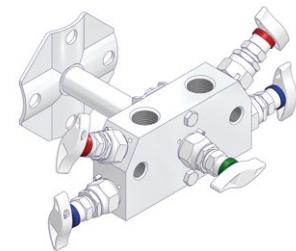

Remote Mounted Manifolds

Ordering Information

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16																																		
R	3	B	C	H	A	-	S	9	S	9	-	R	U																																				
R Remote Mounted Manifolds																																																	
Quantity Bonnets – 2, 3 or 5																																																	
Vent Connection																																																	
A	Standard – 2 Valve / 5 Valve Manifold with Vent Ports 1/4 NPT Female, 3 Valve Manifold without Vent Port																																																
B	Vent Ports 1/4 NPT Female – For 3 Valve Manifolds only																																																
G	Vent Ports 1/4 NPT on Process Side of the 5 Valve Manifold																																																
Inlet and Outlet																																																	
A	Female Connections																																																
B	1/4 NPT with Tube Fittings																																																
C	1/2 NPT with Tube Fittings																																																
Material																																																	
S	1.4401 / 1.4404 / 316 / 316L	F	Duplex UNS S31803			B	6Mo UNS S31254																																										
M	Alloy 400 UNS N04400	D	Super Duplex UNS S32750			T	Titanium Grade 2																																										
H	Alloy C-276 UNS N10276	V	Alloy 625 UNS N06625																																														
Bonnet																																																	
A	PTFE	K	O-Ring FKM (FPM by ISO)																																														
B	Graphite	W	Carbon filled PTFE – TA-Luft																																														
D	ISO FE Series Type 1	2	Bellows sealed PN 100																																														
E	ISO FE Series Type 3	4	Bellows sealed PN 250																																														
Inlet																																																	
Thread Type			Fitting Type																																														
N	NPT		C	Single Ferrule Tube Fitting																																													
			K	Twin Ferrule Tube Fitting																																													
Thread Size			Tube Fitting Sizes																																														
2	1/4	4	12 resp. 12S																																														
4	1/2	9	1/2"																																														
Outlet																																																	
Thread Type			Fitting Type																																														
N	NPT		C	Single Ferrule Tube Fitting																																													
			K	Twin Ferrule Tube Fitting																																													
Thread Size			Tube Fitting Sizes																																														
2	1/4	4	12 resp. 12S																																														
4	1/2	9	1/2"																																														
Options - Specify in alphabetical order (digits first, then letters)																																																	
B	Cleaned and Lubricated for Oxygen Service – For PTFE Packing only																																																
F	PTFE Soft Tip																																																
G	POM Soft Tip																																																
S	Stellite Valve Tip																																																
A	Vent Ports Plugged																																																
H	10,000 psi (689 bar) for PTFE Packing / 7,252 psi (500 bar) for Graphite Packing																																																
P	Power Piping ASME B31.1 – For Graphite Packing only																																																
K	Arctic Operations (-55°C (-67°F)) – For PTFE Packing only																																																
M	Wetted Parts with 3.1 certificate																																																
Operation Options																																																	
J	Stainless Steel Handwheel with Locking Plate Design																																																
T	Anti-Tamper Bonnet (Key to be ordered separately)																																																
R	Anti-Tamper Bonnet (1 Key supplied per Valve/Manifold)																																																
Q	AT-Key Lock Bonnet Design																																																
U	Padlock for Anti-Tamper Bonnet / AT-Key Lock Bonnet Design																																																
W	Stainless Steel Handwheel																																																
Accessory Kits																																																	
8	SST Mounting Bracket AKM-R Type for 2" Pipe Mounting supplied separately – For Vertical Impulse Piping Installations																																																

Wetted Parts according to a.m. material list are supplied according to NACE MR0175/MR0103 and ISO 15156 (latest issue) - except Titanium Grade 2.
Note: Not every configuration which can be created in the ordering information is feasible / available.

Direct Mount Manifolds - Wafer Style

Direct Mount Manifolds (2, 3 and 5 Valve Manifolds)

AS-Schneider Direct Mount Manifolds are designed for direct mounting to Pressure and Differential Pressure Transmitters – either Transmitters with standard flange connection in accordance with DIN EN 61518 / IEC 61518 or alternatively to Rosemount 2051/3051 Coplanar™ Pressure Transmitters. The standard vent connection is 1/4 NPT female. Pipe plugs are not installed as standard to 2 and 5 Valve Manifolds. For plugged vent ports (factory installed) and other options see Page 33, 37 and 40 – Ordering Information Direct Mount Manifolds.

The standard type of 3 Valve Manifolds is the one without vent connection. 3 Valve Manifolds with vent connection are supplied with installed pipe plugs as standard. Integral Style 3 Valve Manifolds with Coplanar™ flange connection are provided with vent connections 1/4 NPT female as standard – plugged with vent valves type VS.




We differentiate between Wafer Style Manifolds (see Page 28-33) and Traditional Style Manifolds (see Page 34-37), the Wafer Type for the Rosemount 2051/3051 Coplanar™ Pressure Transmitter is just called Coplanar™ Style Manifold. You will find the Integral Manifolds for 2051/3051 Coplanar™ Pressure Transmitters on Page 38-40. Accessories like Swivel Gauge Adaptors, Vent Valves etc. see Pages 48-53.

The dimensions shown apply only to the illustrated valves (1/2 NPT Threaded / Flange Interface DIN EN 61518) – if you need the dimensions for your individual type or should you still not find your options at all please contact the factory.

Wafer Style Manifolds




2 Valve Manifolds – Standard

W2AA Type

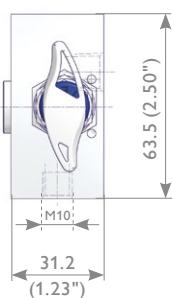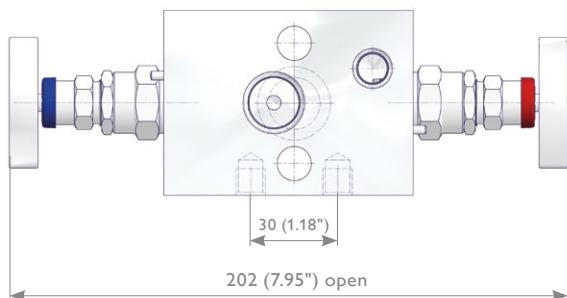

2 Valve Manifolds – L-Shaped Bonnet Orientation


W2LA Type

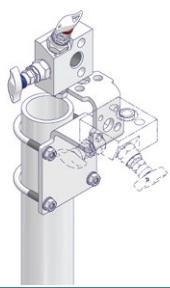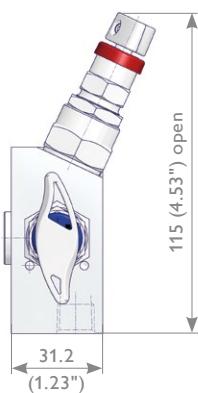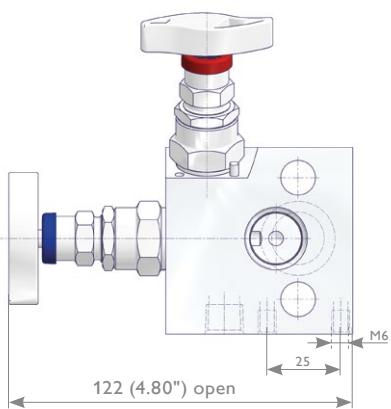

Mounting Bracket
AKM-U Type
See also Page 49.



Mounting Bracket
AKM-U Type
See also Page 49.








Mounting Bracket
AKM-D Type
See also Page 48.

Direct Mount Manifolds - Wafer Style

3 Valve Manifolds – Standard (Female x Flanged)

Without Vent Connection W3AA Type





With Vent Connection W3BA Type

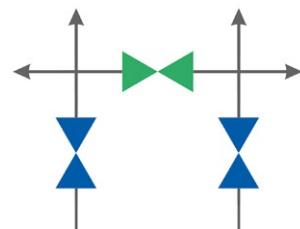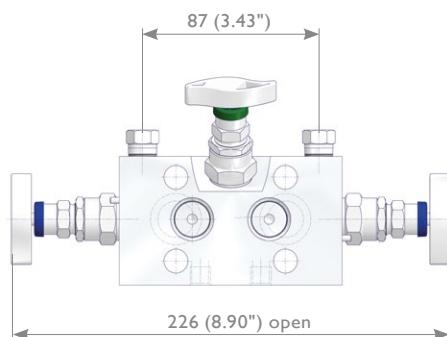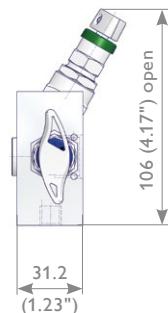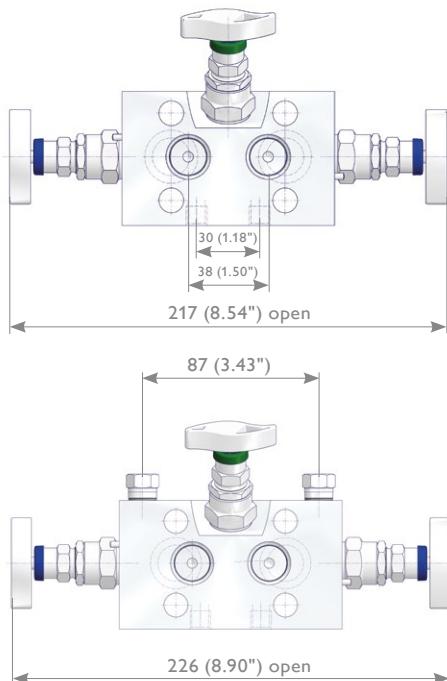

3 Valve Manifolds – Standard (Flanged x Flanged)

Without Vent Connection W3AB Type


With Vent Connection W3BB Type

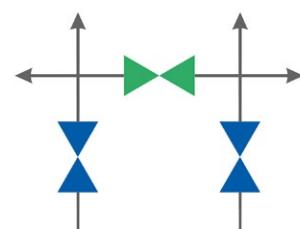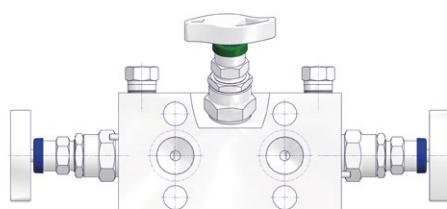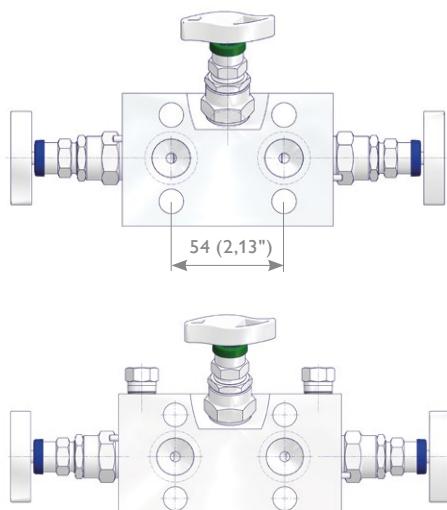

Mounting Bracket
AKM-U Type
See also Page 49.



Mounting Bracket
AKM-D Type
See also Page 48.








Direct Mount Manifolds - Wafer Style

3 Valve Manifolds – Compact Design (Female x Flanged)




Without Vent Connection W3CA Type

With Vent Connection 1/4 NPT Female W3DA Type

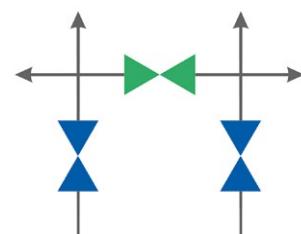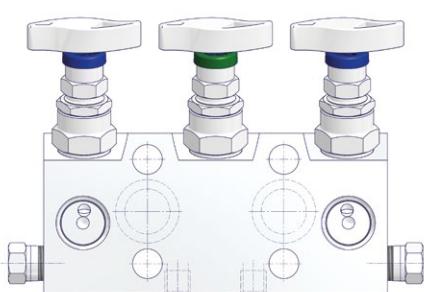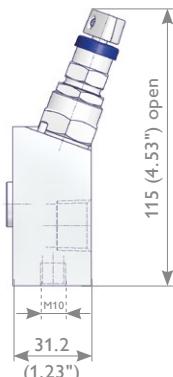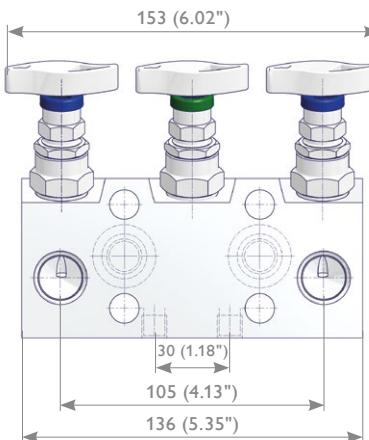


3 Valve Manifolds – Bottom Inlet Design (Female x Flanged)

W3EA Type

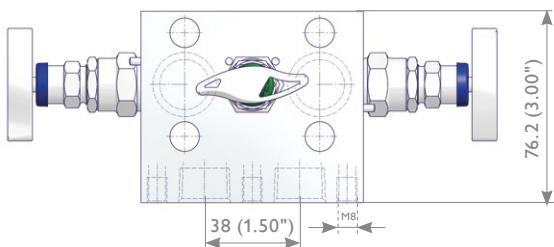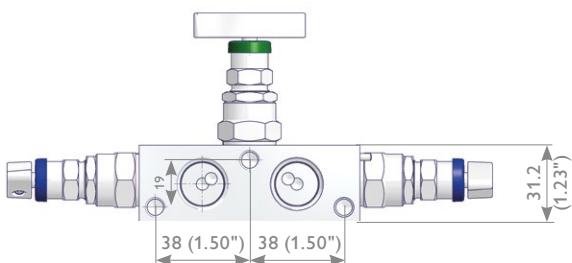


For Bottom Inlet Design only

Mounting Bracket
AKM-B Type
See also Page 48.

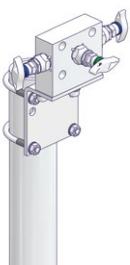


Mounting Bracket
AKM-U Type
See also Page 49.

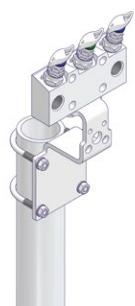


For Compact Design

Mounting Bracket
AKM-D Type
See also Page 48.




Direct Mount Manifolds - Wafer Style

5 Valve Manifolds – Standard (Female x Flanged IEC 61518-A) W5AA Type

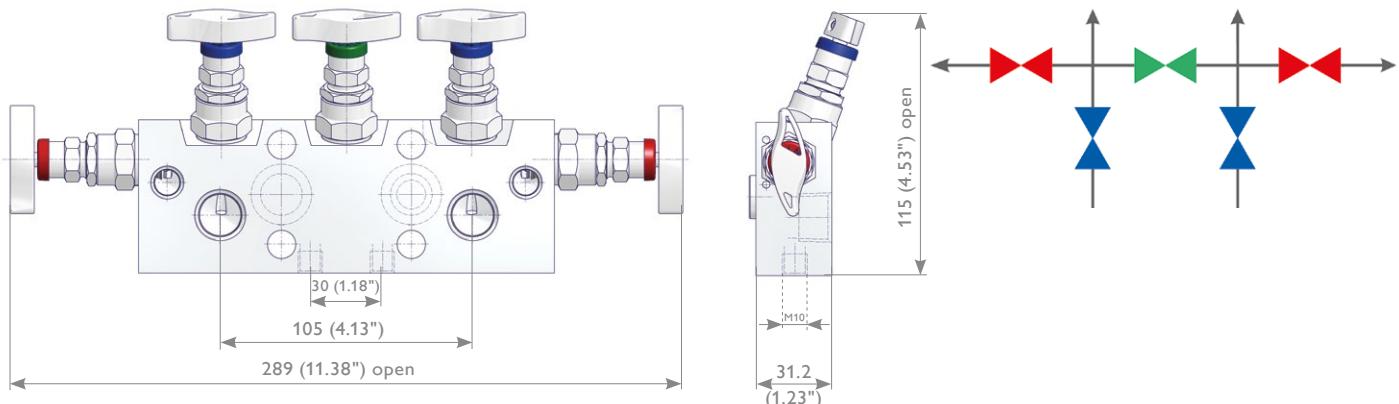


5 Valve Manifolds – Female x Flanged IEC 61518-B W5AA Type

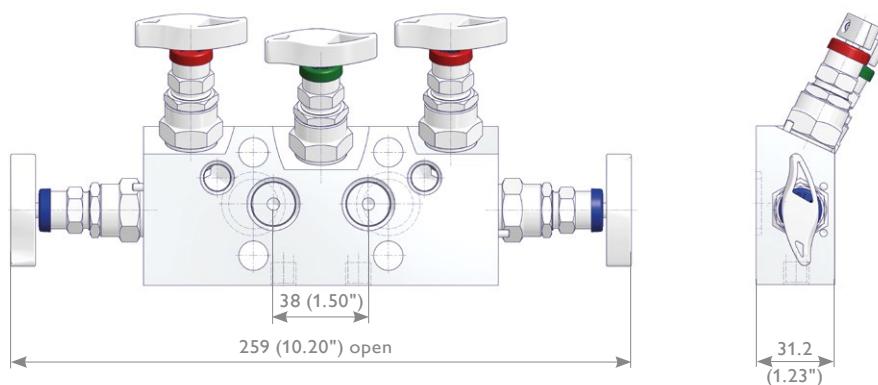

5 Valve Manifolds – Female x Flanged

Vent Ports on Bottom Face


W5GA Type

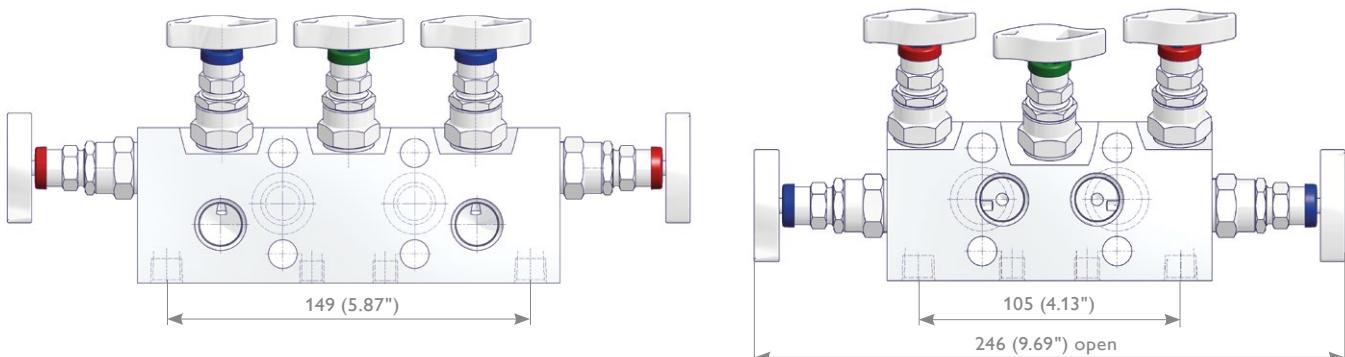

Illustrated type with IEC 61518-A connection*



* Other dimensions same as W5AA Type

Illustrated type with IEC 61518-B connection*
Only suitable for AKM-U type Mounting Bracket


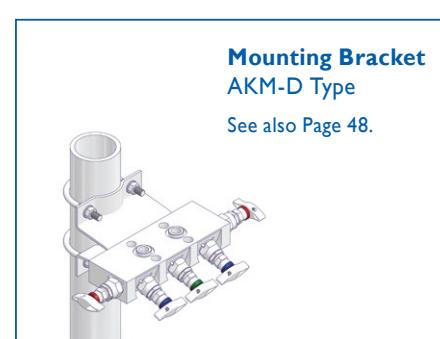


Direct Mount Manifolds - Wafer Style

5 Valve Manifolds – Compact Design (Female x Flanged) W5CA Type

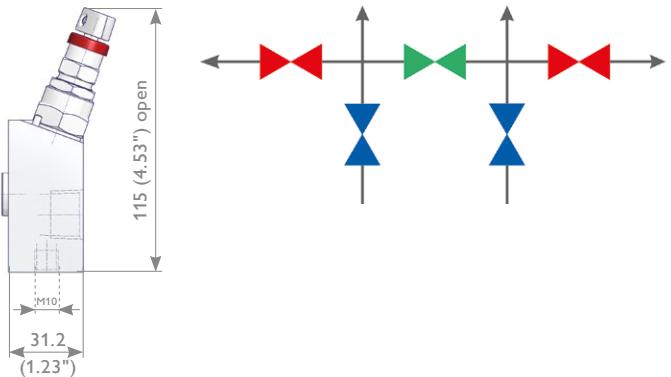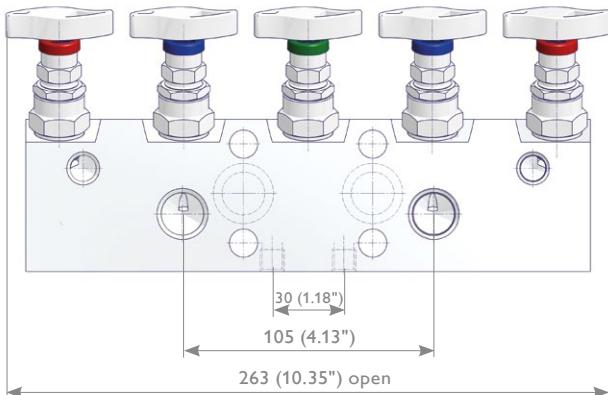


5 Valve Manifolds – Bottom Inlet Design (Female x Flanged) W5EA Type

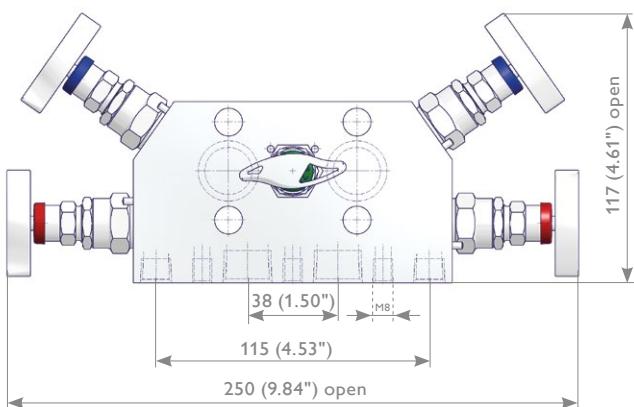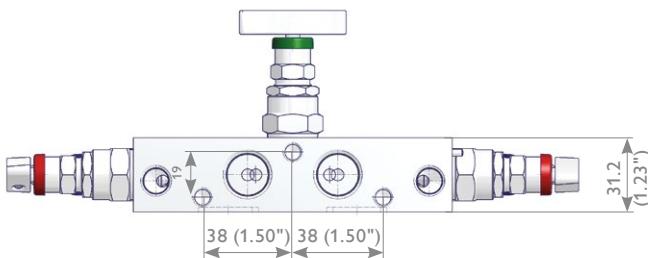

For Bottom Inlet Design only



For Compact Design

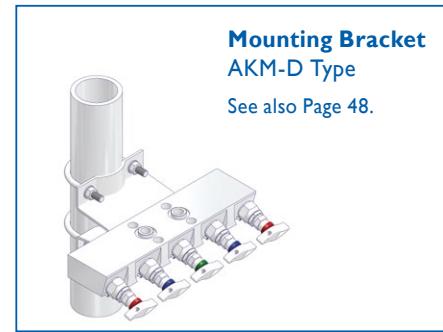

Direct Mount Manifolds - Wafer Style

Ordering Information

	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16									
	W	2	A	A	S	B	-	N	4	T	E	-	A	P	S										
W	Wafer Style Manifolds																								
Quantity Bonnets - 2-5																									
Manifold Specifics																									
A	Standard – 2 Valve / 5 Valve Manifold with Vent Ports 1/4 NPT Female, 3 Valve Manifold without Vent Port																								
B	Vent Ports 1/4 NPT Female Plugged – For 3 Valve Manifolds only ^{*2}																								
C	Compact Design – 5 Valve Manifold with Vent Ports 1/4 NPT Female, 3 Valve Manifold without Vent Port																								
D	Compact Design – 3 Valve Manifold with Vent Port 1/4 NPT Female																								
E	Bottom Inlet Design																								
G	Vent Ports on Bottom Face of the 5 Valve Manifold																								
L	L-Shaped Bonnet Orientation																								
Inlet																									
A	Female																								
B	Flanged																								
C	1/2 NPT with Tube Fittings																								
D	G 1/2 with Tube Fittings																								
Material																									
S	1.4401 / 1.4404 / 316 / 316L	F	Duplex UNS S31803	B	6Mo UNS S31254																				
M	Alloy 400 UNS N04400	D	Super Duplex UNS S32750	T	Titanium Grade 2																				
H	Alloy C-276 UNS N10276	V	Alloy 625 UNS N06625																						
Bonnet																									
A	PTFE	K	O-Ring FKM (FPM by ISO)																						
B	Graphite	W	Carbon filled PTFE – TA-Luft																						
D	ISO FE Series Type 1	2	Bellows sealed PN 100																						
E	ISO FE Series Type 3	4	Bellows sealed PN 250																						
Inlet																									
Thread Type		Fitting Type		Flange Interface																					
N	NPT	C	Single Ferrule Tube Fitting	T	Flange Interface																				
H	BSP Parallel (G) – DIN 3852	K	Twin Ferrule Tube Fitting																						
Thread Size		Tube Fitting Sizes		Flange Interface																					
2	1/4	4	12 resp. 12S	4	EN 61518 without 1/4 NPT																				
4	1/2	5	14 resp. 14S																						
		9	1/2"																						
Outlet																									
Transmitter Interface																									
TD	DIN EN 61518-A																								
TE	DIN EN 61518-B																								
Options - Specify in alphabetical order (digits first, then letters)																									
B	Cleaned and Lubricated for Oxygen Service – For PTFE Packing only																								
F	PCTFE Soft Tip																								
G	POM Soft Tip																								
S	Stellite Valve Tip																								
A	Vent Ports Plugged ^{*2}																								
P	Power Piping ASME B31.1 – For Graphite Packing only																								
K	Arctic Operations (-55°C (-67°F)) – For PTFE Packing only																								
M	Wetted Parts with 3.1 certificate																								
Operation Options																									
J	Stainless Steel Handwheel with Locking Plate Design																								
T	Anti-Tamper Bonnet (Key to be ordered separately)																								
R	Anti-Tamper Bonnet (1 Key supplied per Valve/Manifold)																								
Q	AT-Key Lock Bonnet Design																								
U	Padlock for Anti-Tamper Bonnet / AT-Key Lock Bonnet Design																								
W	Stainless Steel Handwheel																								
Standard Accessory Kits for Manifold to Transmitter mounting according to DIN EN 61518 / IEC 61518^{*4}																									
1	Hex Cap Screw 7/16-20 UNF, Bolt Length 1 3/4", C.S., PTFE Seal Rings																								
2	Hex Cap Screw 7/16-20 UNF, Bolt Length 1 3/4", Bolt Material S.S. = 316 Stainless Steel I ASTM A193 B8M Class 2, PTFE Seal Rings																								
3	Hex Cap Screw 7/16-20 UNF, Bolt Length 1 3/4", C.S., Graphite Seal Rings																								
4	Hex Cap Screw 7/16-20 UNF, Bolt Length 1 3/4", Bolt Material S.S. = 316 Stainless Steel I ASTM A193 B8M Class 2, Graphite Seal Rings																								
Mounting Bracket Kits																									
7	CST Mounting Bracket AKM-D Type for 2" Pipe Mounting supplied separately – For Vertical Impulse Piping ^{*1 *3}																								
8	SST Mounting Bracket AKM-B, or -D Type for 2" Pipe Mounting supplied separately – For Vertical Impulse Piping ^{*1 *3}																								
9	SST Mounting Bracket AKM-U Type for 2" Pipe Mounting supplied separately – For Horizontal and Vertical Impulse Piping ^{*1}																								

*1 Relevant Bracket Type see Pages 28-32.

*2 For W3B Types Option A is not relevant because it is already included.

*3 Not applicable for W5GA type with IEC 61518-B connection.




*4 Mentioned bolt length 1 3/4" not applicable for manifold type W3AB/W3BB - the bolt length depends here on the flange thickness of the flange on the process side.

Wetted Parts according to a.m. material list are supplied according to NACE MR0175/MR0193 and ISO 15156 (latest issue) - except Titanium Grade 2.
Notes: Not every configuration which can be created in the ordering information is feasible / available.



Direct Mount Manifolds - Traditional Style

Traditional Style Manifolds


2 Valve Manifolds – Female x Flanged T2A Type

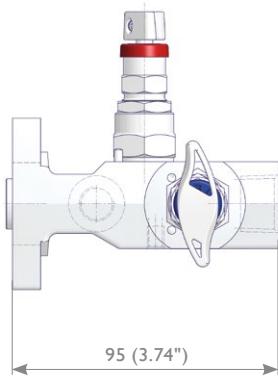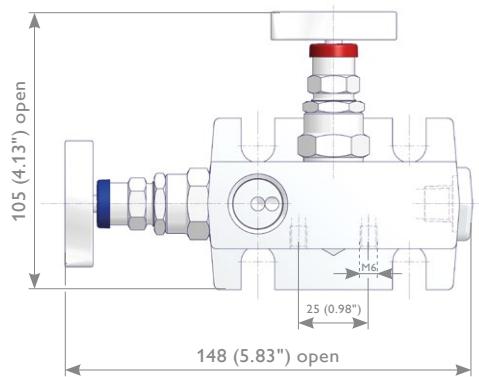

2 Valve Manifolds – Flanged x Flanged H2A Type

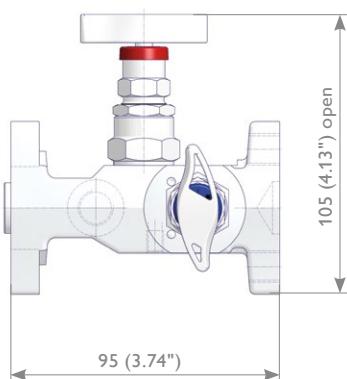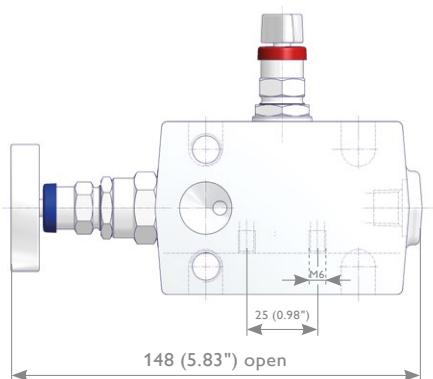


Mounting Bracket
AKM-U Type
See also Page 49.

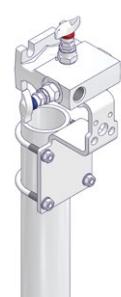


Direct Mount Manifolds - Traditional Style

3 Valve Manifolds – Without Vent Connection

T3A Type – Female x Flanged

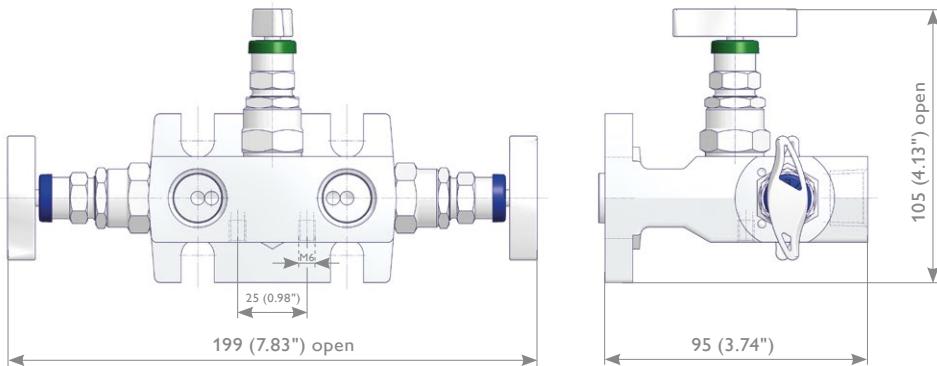


H3A Type – Flanged x Flanged

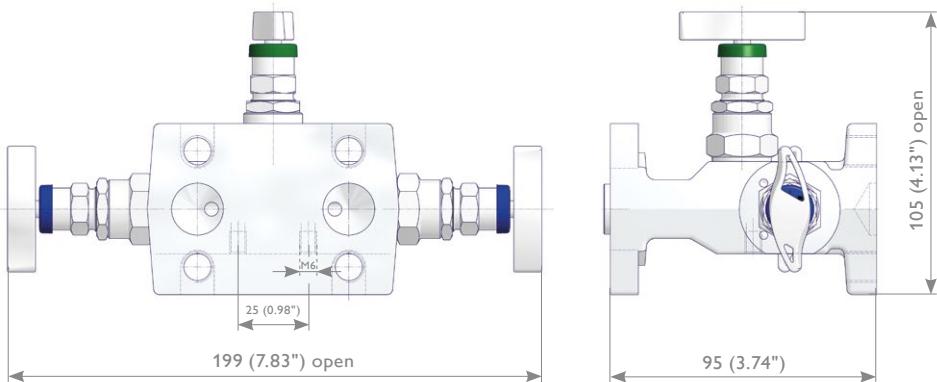


3 Valve Manifolds – With Vent Connection

T3B Type – Female x Flanged

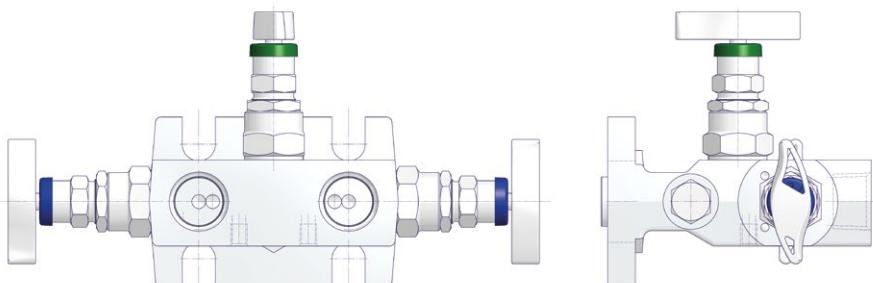

H3B Type – Flanged x Flanged



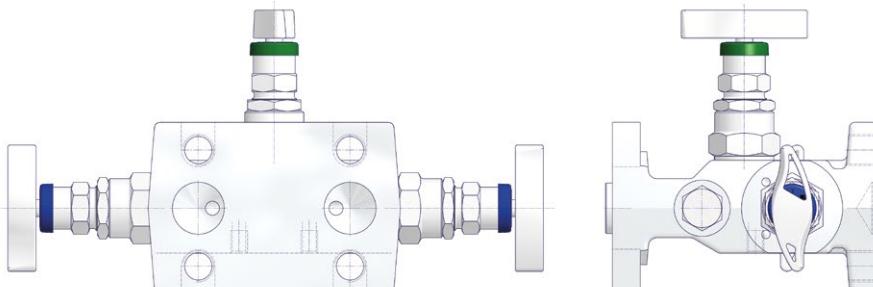


Mounting Bracket
AKM-U Type
See also Page 49.

Direct Mount Manifolds - Traditional Style




5 Valve Manifolds – Female x Flanged

T5A Type

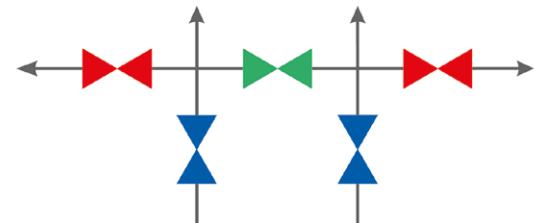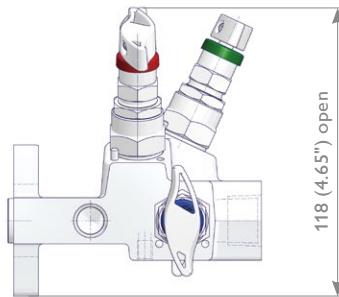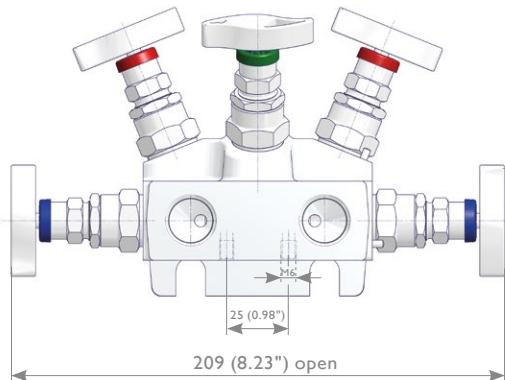




5 Valve Manifolds – Flanged x Flanged

H5A Type

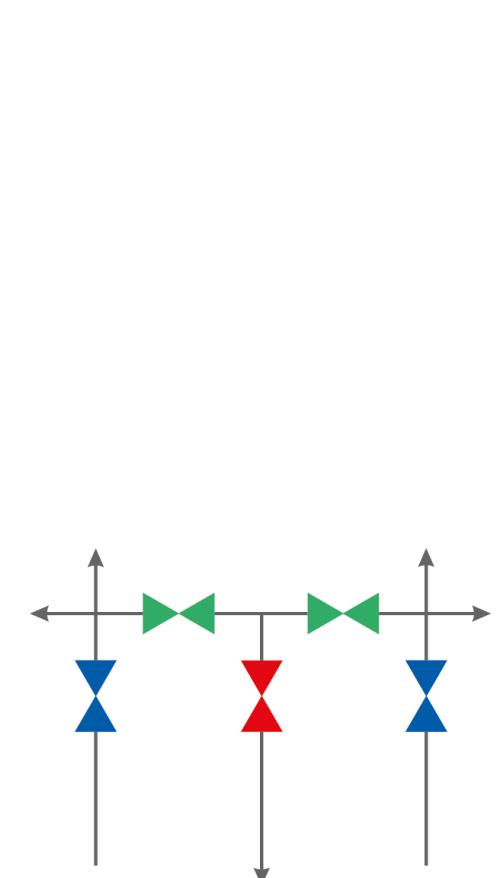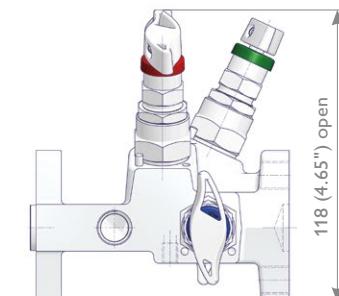
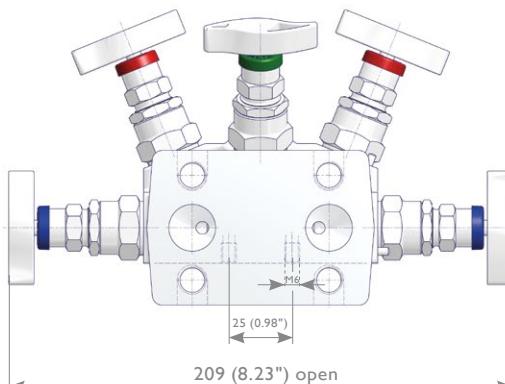


5 Valve Manifolds with Natural Gas Metering Pattern

T5N Type

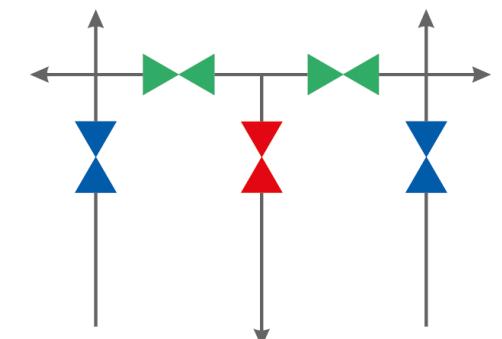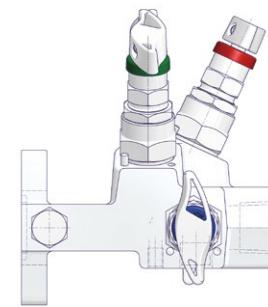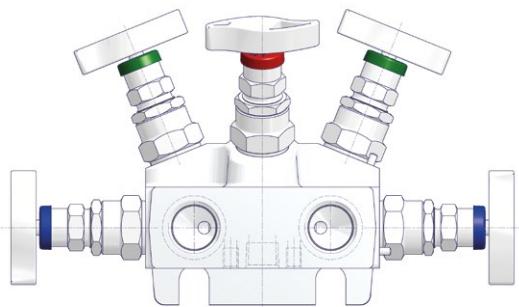

H5N Type

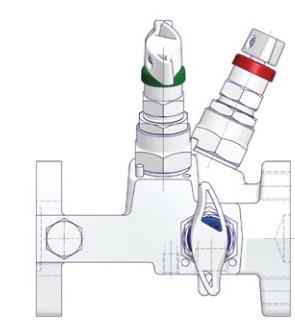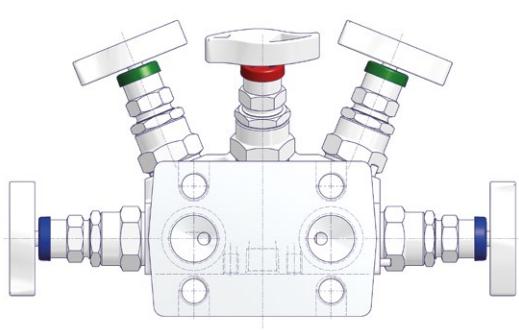

Direct Mount Manifolds - Traditional Style

Ordering Information

	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16								
	H	3	B	B	S	A	-	N	4	T	E	-	B	R										
H	H-Style Manifolds																							
T	T-Style Manifolds																							
Quantity Bonnets – 2-5																								
Manifold Specifics																								
A	Standard – 2 Valve / 5 Valve Manifold with Vent Ports 1/4 NPT Female, 3 Valve Manifold without Vent Port																							
B	Vent Ports 1/4 NPT Female Plugged – For 3 Valve Manifolds only ^{*2}																							
N	Natural Gas Metering Pattern – For 5 Valve Manifolds only																							
Inlet																								
A	Female – For T-Style Manifolds only																							
B	Flanged – For H-Style Manifolds only																							
C	1/2 NPT with Tube Fittings – For T-Style Manifolds only																							
Material																								
S	1.4401 / 1.4404 / 316 / 316L	F	Duplex UNS S31803			B	6Mo UNS S31254																	
M	Alloy 400 UNS N04400	D	Super Duplex UNS S32750			T	Titanium Grade 2																	
H	Alloy C-276 UNS N10276	V	Alloy 625 UNS N06625																					
Bonnet																								
A	PTFE	K	O-Ring FKM (FPM by ISO)																					
B	Graphite	W	Carbon filled PTFE – TA-Luft																					
D	ISO FE Series Type 1	2	Bellows sealed PN 100																					
E	ISO FE Series Type 3	4	Bellows sealed PN 250																					
Inlet																								
Thread Type			Fitting Type			Flange Interface																		
N	NPT		C	Single Ferrule Tube Fitting			T	Flange Interface																
			K	Twin Ferrule Tube Fitting																				
Thread Size			Tube Fitting Sizes			Flange Interface																		
4	1/2		4	12 resp. 12S			4	EN 61518																
			5	14 resp. 14S																				
			9	1/2"																				
Outlet																								
Transmitter Interface																								
TD	DIN EN 61518-A																							
TE	DIN EN 61518-B																							
Options - Specify in alphabetical order (digits first, then letters)																								
B	Cleaned and Lubricated for Oxygen Service – For PTFE Packing only																							
F	PCTFE Soft Tip																							
G	POM Soft Tip																							
S	Satellite Valve Tip																							
A	Vent Ports Plugged ^{*2}																							
P	Power Piping ASME B31.1 – For Graphite Packing only																							
K	Arctic Operations (-55°C (-67°F)) – For PTFE Packing only																							
M	Wetted Parts with 3.1 certificate																							
Operation Options																								
J	Stainless Steel Handwheel with Locking Plate Design																							
T	Anti-Tamper Bonnet (Key to be ordered separately)																							
R	Anti-Tamper Bonnet (1 Key supplied per Valve/Manifold)																							
Q	AT-Key Lock Bonnet Design																							
U	Padlock for Anti-Tamper Bonnet / AT-Key Lock Bonnet Design																							
W	Stainless Steel Handwheel																							
Standard Accessory Kits for Manifold to Transmitter mounting according to DIN EN 61518 / IEC 61518																								
1	Hex Cap Screw 7/16-20 UNF, Bolt Length 1" and Washer in C.S., PTFE Seal Rings																							
2	Hex Cap Screw 7/16-20 UNF, Bolt Length 1" and Washer in S.S., PTFE Seal Rings ^{*3}																							
3	Hex Cap Screw 7/16-20 UNF, Bolt Length 1" and Washer in C.S., Graphite Seal Rings																							
4	Hex Cap Screw 7/16-20 UNF, Bolt Length 1" and Washer in S.S., Graphite Seal Rings ^{*3}																							
Mounting Bracket Kits																								
9	SST Mounting Bracket AKM-U Type for 2" Pipe Mounting supplied separately – For Horizontal and Vertical Impulse Piping Installations ^{*1}																							

^{*1} Relevant Bracket Type see Pages 34-36.

^{*2} For H3B/T3B Types Option A is not relevant because it's already included.

^{*3} Bolt Material S.S. = 316 Stainless Steel | ASTM A193 B8M Class 2

Wetted Parts according to a.m. material list are supplied according to NACE MR0175/MR0103 and ISO 15156 (latest issue) - except Titanium Grade 2.
Note: Not every configuration which can be created in the ordering information is feasible / available.



Direct Mount Manifolds - Integral Style

Integral Manifolds for
Rosemount 2051/3051 Coplanar™ Pressure Transmitters

Coplanar™ Style Manifolds

2 Valve Integral Manifolds



W2RA Type

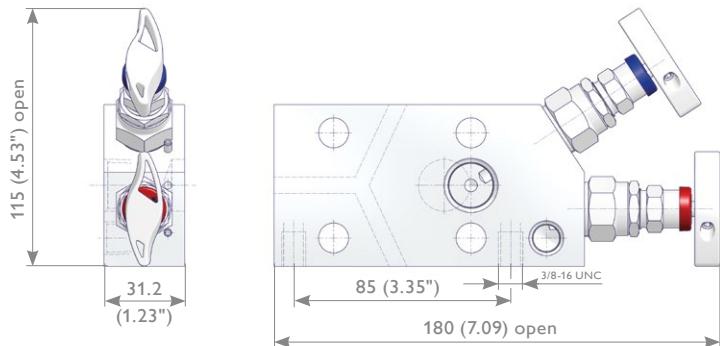

3 Valve Integral Manifolds



W3RA Type

Supplied as standard with vent valves – fitted

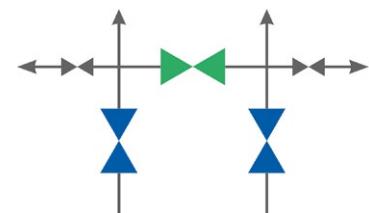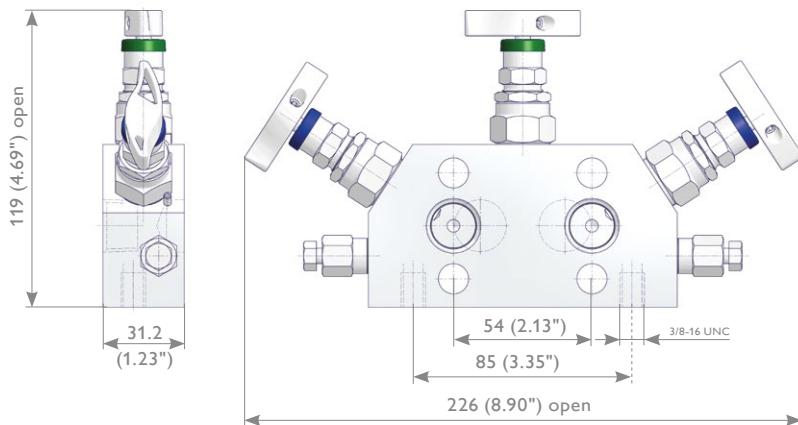

5 Valve Integral Manifolds

W5RA Type

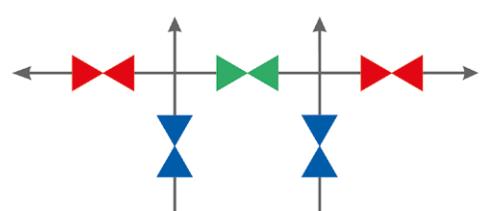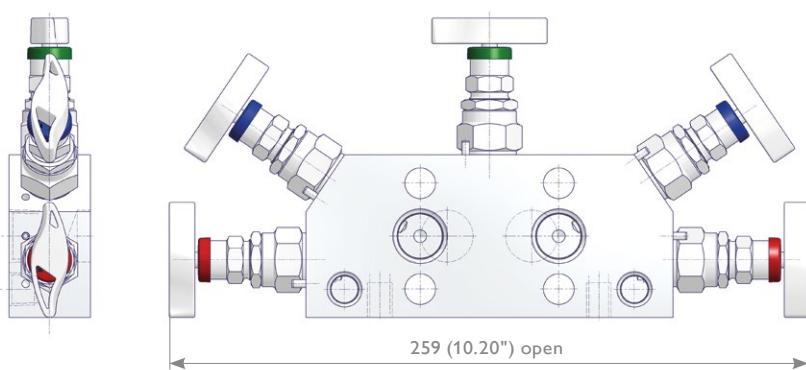

Mounting Bracket
AKM-C Type

See also Page 48.




Direct Mount Manifolds - Integral Style

Traditional Style Integral Manifolds

Inlet with Flange Interface DIN EN 61518 / IEC 61518 and 1/4 NPT female only.

2 Valve Integral Manifolds


H2TB Type

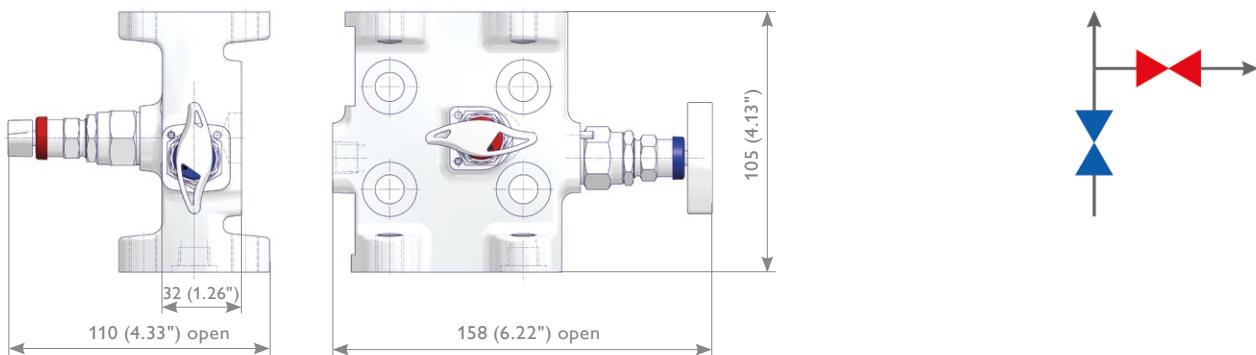

3 Valve Integral Manifolds


H3TB Type

Supplied as standard with vent valves – fitted

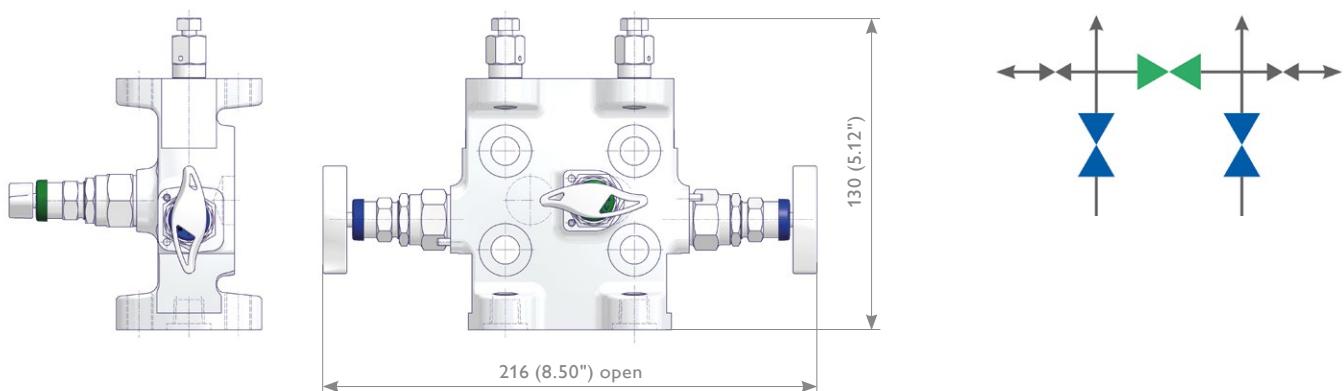


5 Valve Integral Manifolds

H5TB Type

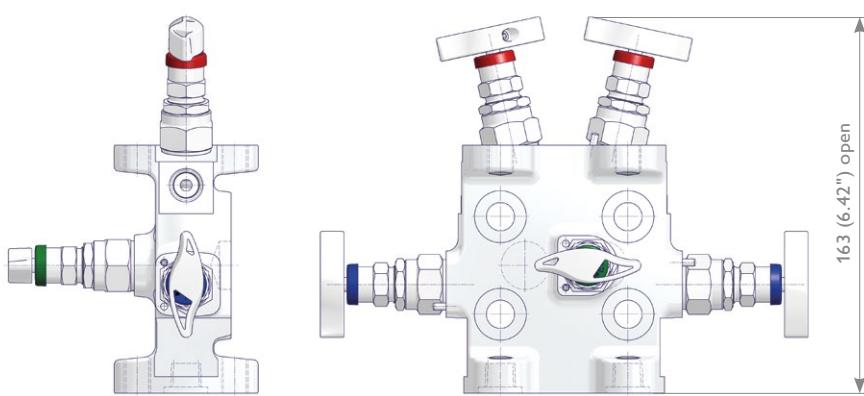

Mounting Bracket
AKM-T Type
See also Page 49.

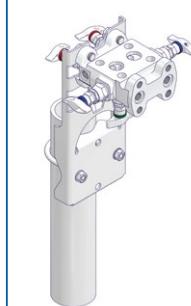

Direct Mount Manifolds - Integral Style

Ordering Information

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16		
W	3	R	A	S	A	-	N	4	T	F	-	M	S	T			
W Coplanar™ Style Manifolds																	
H Traditional Style Integral Manifolds																	
Quantity Bonnets - 2-5																	
Manifold Specifics																	
R	Integral Manifold – Coplanar™ Style																
T	Integral Manifold – Traditional Style																
Inlet																	
A	Female																
B	Flanged – For Traditional Style Integral Manifolds only																
C	1/2 NPT with Tube Fitting																
Material																	
S	1.4401 / 1.4404 / 316 / 316L	F	Duplex UNS S31803	B	6Mo UNS S31254												
M	Alloy 400 UNS N04400	D	Super Duplex UNS S32750	T	Titanium Grade 2												
H	Alloy C-276 UNS N10276	V	Alloy 625 UNS N06625														
Bonnet																	
A	PTFE	K	O-Ring FKM (FPM by ISO)														
B	Graphite	W	Carbon filled PTFE - TA-Luft														
D	ISO FE Series Type 1	2	Bellows sealed PN 100														
E	ISO FE Series Type 3	4	Bellows sealed PN 250														
Inlet																	
Thread Type		Fitting Type		Flange Interface													
N	NPT	C	Single Ferrule Tube Fitting	T	Flange Interface												
		K	Twin Ferrule Tube Fitting														
Thread Size		Tube Fitting Sizes		Flange Interface													
4	1/2	4	12 resp. 12S	3	EN 61518 with 1/4 NPT Female – For Traditional Style Integral Manifolds												
		9	1/2"														
Outlet																	
Transmitter Interface																	
TF	Rosemount 2051/3051 Coplanar™ Pressure Transmitter																
Options - Specify in alphabetical order (digits first, then letters)																	
B	Cleaned and Lubricated for Oxygen Service – For PTFE Packing only																
F	PCTFE Soft Tip																
G	POM Soft Tip																
S	Stellite Valve Tip																
A	Veni Ports Plugged																
P	Power Piping ASME B31.1 – For Graphite Packing only																
K	Arctic Operations (-55°C (-67°F)) – For PTFE Packing only																
M	Wetted Parts with 3.1 certificate																
Operation Options																	
J	Stainless Steel Handwheel with Locking Plate Design																
T	Anti-Tamper Bonnet (Key to be ordered separately)																
R	Anti-Tamper Bonnet (1 Key supplied per Valve/Manifold)																
Q	AT-Key Lock Bonnet Design																
U	Padlock for Anti-Tamper Bonnet / AT-Key Lock Bonnet Design																
VW	Stainless Steel Handwheel																
Mounting Bracket Kits																	
7	CST Mounting Bracket AKM-C Type for 2" Pipe Mounting supplied separately – For Vertical Impulse Piping Installations*																
8	SST Mounting Bracket AKM-C Type for 2" Pipe Mounting supplied separately – For Vertical Impulse Piping Installations*																
9	SST Mounting Bracket AKM-T Type for 2" Pipe Mounting supplied separately – For Horizontal Impulse Piping Installations*																

* Relevant Bracket Type see Pages 38-39.

Wetted Parts according to a.m. material list are supplied according to NACE MR0175/MR0103 and ISO 15156 (latest issue) - except Titanium Grade 2.

Note: Not every configuration which can be created in the ordering information is feasible / available.


5 Valve Manifolds with Natural Gas Metering Pattern

5 Valve Manifolds with Natural Gas Metering Pattern


AS-Schneider is manufacturing various 5 Valve Manifold Designs with Natural Gas Metering Pattern for direct mounting to Differential Pressure Transmitters – either Transmitters with standard flange connection in accordance with IEC 61518 or alternatively to Rosemount 2051/3051 Coplanar™ Pressure Transmitters. The standard vent connection is 1/4 NPT female. Pipe plugs are not installed as standard. For plugged vent ports (factory installed) and other options see Page 42 – Ordering Information 5 Valve Manifolds with Natural Gas Metering Pattern. The standard test connection is 1/4 NPT female plugged. Accessories like Swivel Gauge Adaptors, Vent Valves etc. see Pages 48-53.

The dimensions shown apply only to the illustrated valves (1/2 NPT Threaded) – if you need the dimensions for your individual type or should you still not find your options at all please contact the factory.

5 Valve Manifolds - Instrument Connection acc. to IEC 61518 5AAF Type

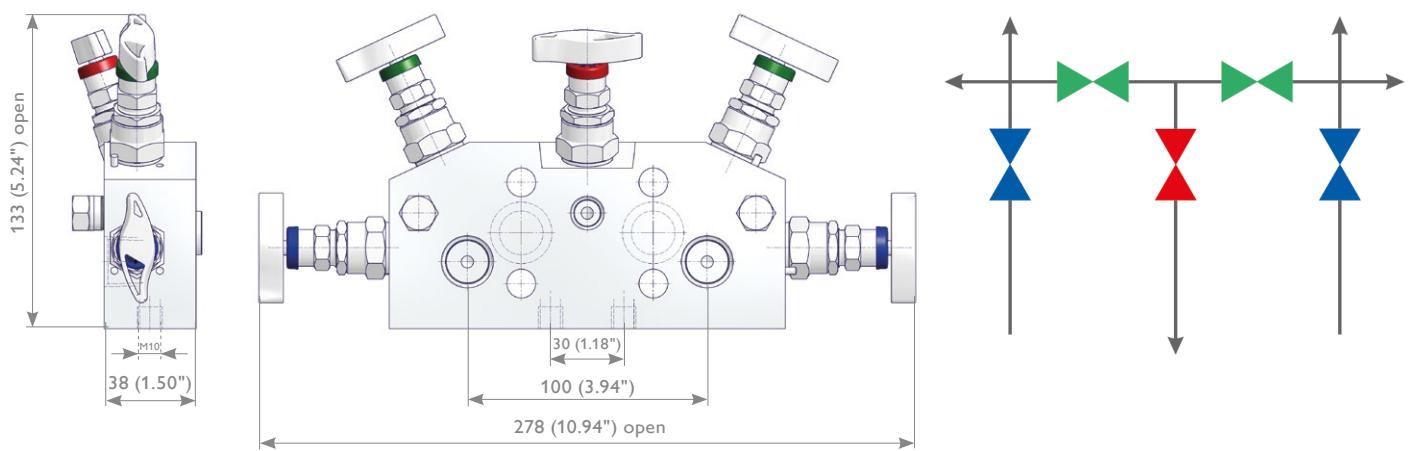

5 Valve Integral Manifolds - Instrument Connection for Rosemount 2051/3051 Coplanar™ Pressure Transmitter 5DAF Type

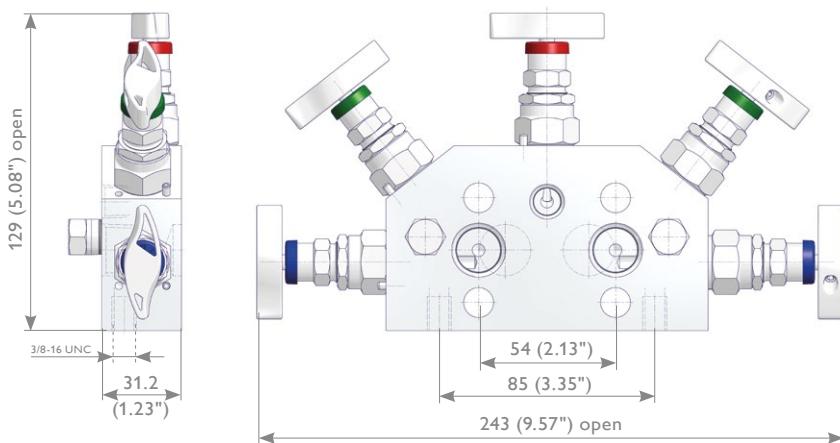


Manifold Type D
(For Rosemount Coplanar™ Transmitter)



Mounting Bracket
AKM-C Type

See also Page 48.

Manifold Type A
(DIN EN 61518 / IEC 61518)

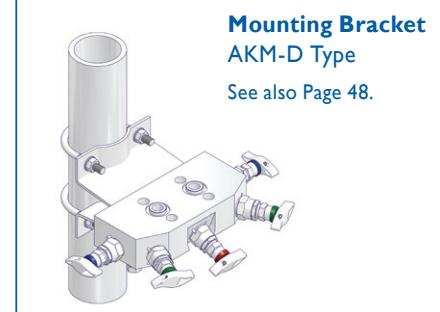

Mounting Bracket
AKM-D Type

See also Page 48.

5 Valve Manifolds with Natural Gas Metering Pattern

Ordering Information

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16																																											
5	A	A	T	S	K	-	C	4	A	D	-	A	F	M																																												
5 5 Valve Manifolds with Natural Gas Metering Pattern																																																										
Manifold Type																																																										
A Outlet DIN EN 61518-A – Test Connection 1/4 NPT – Vent Port 1/4 NPT – Inlet 1/2 NPT																																																										
D Outlet for Rosemount 2051/3051 Coplanar™ Pressure Transmitter – Test Connection 1/4 NPT – Vent Port 1/4 NPT – Inlet 1/2 NPT																																																										
Vent Connection																																																										
A 1/4 NPT Female	E 1/4 NPT with Single Ferrule Tube Fitting 12S																																																									
C 1/4 NPT with Twin Ferrule Tube Fitting 12 mm																																																										
Inlet																																																										
F Female																																																										
T Tube Fitting																																																										
Material																																																										
S 1.4401 / 1.4404 / 316 / 316L	F Duplex UNS S31803		B 6Mo UNS S31254																																																							
M Alloy 400 UNS N04400	D Super Duplex UNS S32750		T Titanium Grade 2																																																							
H Alloy C-276 UNS N10276	V Alloy 625 UNS N06625																																																									
Bonnet																																																										
A PTFE	K O-Ring FKM (FPM by ISO)																																																									
B Graphite	W Carbon filled PTFE – TA-Luft																																																									
D ISO FE Series Type 1	2 Bellows sealed PN 100																																																									
E ISO FE Series Type 3	4 Bellows sealed PN 250																																																									
Inlet																																																										
Thread Size		Fitting Type			Tube Fitting Sizes																																																					
N4	NPT	C	Single Ferrule Tube Fitting		4	12 resp. 12S																																																				
C Twin Ferrule Tube Fitting																																																										
Test Connection																																																										
A 1/4 NPT Female plugged																																																										
Outlet																																																										
Transmitter Interface																																																										
D DIN EN 61518-A																																																										
F Rosemount 2051/3051 Coplanar™ Pressure Transmitter																																																										
Options - Specify in alphabetical order (digits first, then letters)																																																										
B Cleaned and Lubricated for Oxygen Service –For PTFE Packing only																																																										
F PCTFE Soft Tip																																																										
G POM Soft Tip																																																										
S Stellite Valve Tip																																																										
A Vent Ports Plugged																																																										
P Power Piping ASME B31.1 – For Graphite Packing only																																																										
K Arctic Operations (-55°C (-67°F)) – For PTFE Packing only																																																										
M Wetted Parts with 3.1 certificate																																																										
Operation Options																																																										
J Stainless Steel Handwheel with Locking Plate Design																																																										
T Anti-Tamper Bonnet (Key to be ordered separately)																																																										
R Anti-Tamper Bonnet (1 Key supplied per Valve/Manifold)																																																										
Q AT-Key Lock Bonnet Design																																																										
U Padlock for Anti-Tamper Bonnet / AT-Key Lock Bonnet Design																																																										
V Stainless Steel Handwheel																																																										
Accessory Kits for Manifold to Transmitter mounting according to DIN EN 61518 - For 5A Type only (not for 5D Type)																																																										
1 Hex Cap Screw 7/16-20 UNF, Bolt Length 2", C.S., PTFE Seal Rings																																																										
2 Hex Cap Screw 7/16-20 UNF, Bolt Length 2", S.S., PTFE Seal Rings*																																																										
3 Hex Cap Screw 7/16-20 UNF, Bolt Length 2", C.S., Graphite Seal Rings																																																										
4 Hex Cap Screw 7/16-20 UNF, Bolt Length 2", S.S., Graphite Seal Rings*																																																										
Mounting Bracket Kits																																																										
7 CST Mounting Bracket AKM-C or -D Type for 2" Pipe Mounting supplied separately – For Vertical Impulse Piping Installations																																																										
8 SST Mounting Bracket AKM-C or -D Type for 2" Pipe Mounting supplied separately – For Vertical Impulse Piping Installations																																																										

* Bolt Material S.S. = 316 Stainless Steel / ASTM A193 B8M Class 2

Wetted Parts according to a.m. material list are supplied according to NACE MR0175/MR0103 and ISO 15156 (latest issue) - except Titanium Grade 2.
Note: Not every configuration which can be created in the ordering information is feasible / available.

Enclosure Manifolds EDM Series

Enclosure Manifolds EDM Series (2, 3 and 5 Valve Manifolds)

AS-Schneider Enclosure Manifolds EDM Series are manufactured for applications that require the transmitter to be mounted in an enclosure for environmental protection. The standard vent connection is 1/4 NPT female. Pipe plugs are not installed as standard. For plugged vent ports (factory installed) and other options see page 45 – Ordering Information Enclosure Manifolds.

The dimensions shown apply only to the illustrated valves (1/2 NPT Threaded) – if you need the dimensions for your individual type or should you still not find your options at all please contact the factory.


2 Valve Manifolds

Transmitter Connection

Acc. to DIN EN 61518
E2AA Type


1/2 NPT Female
E2AC Type

Swivel Nut
E2AE Type

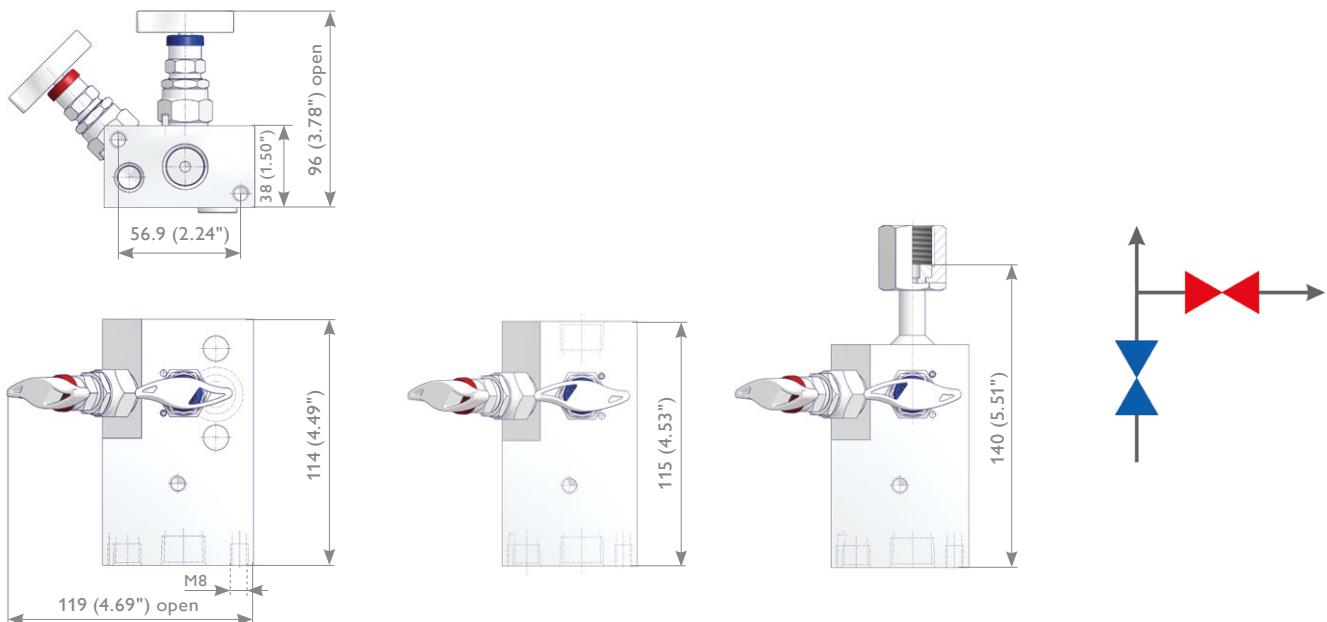

3 Valve Manifolds – Female x Flanged



E3AA Type

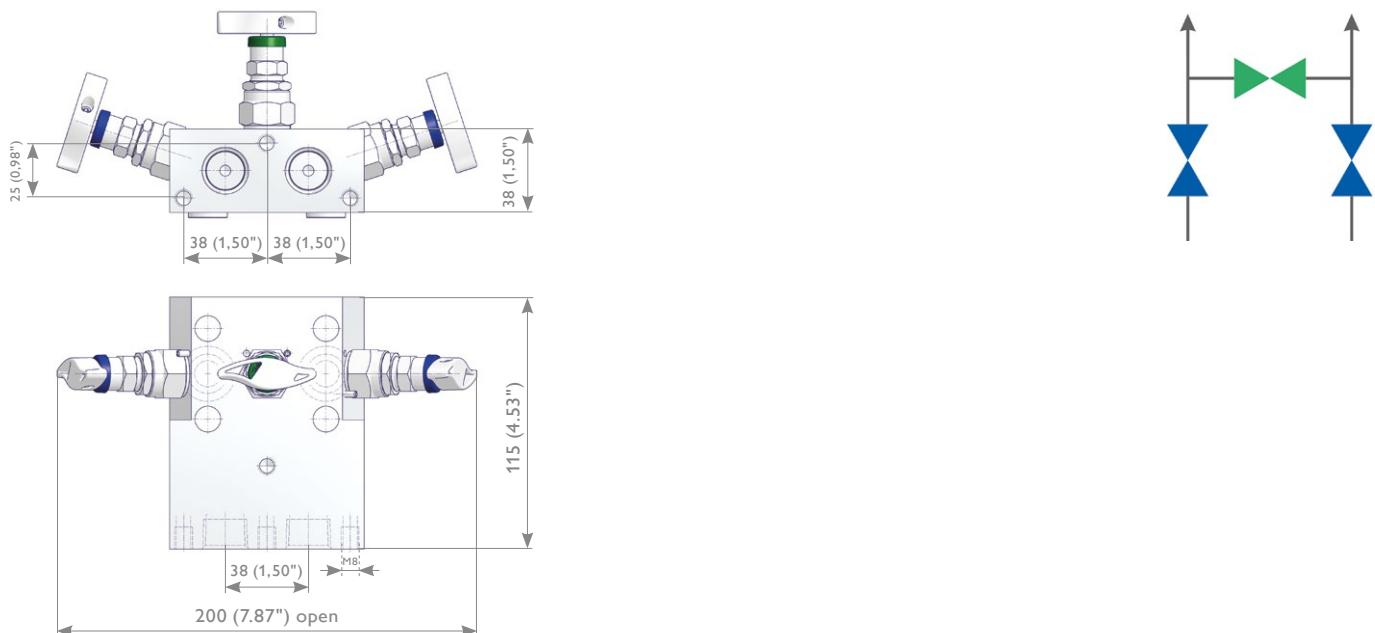


Enclosure Manifolds EDM Series

5 Valve Manifolds – Female x Flanged

- Standard Flow Schematic → E5AA Type
- Upstream Vent Schematic → E5UA Type

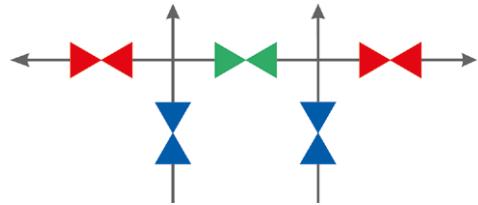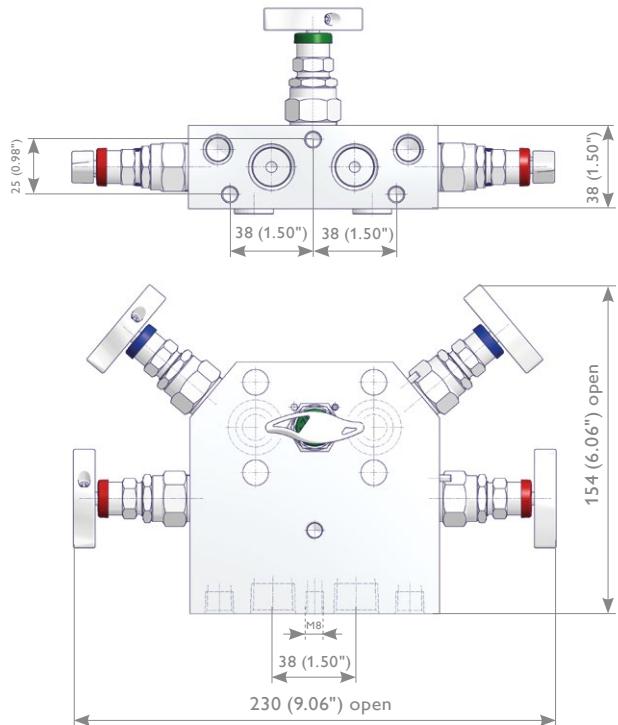


E5UA Type

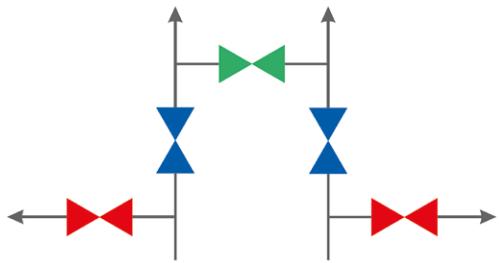


Enclosure Systems

AS-Schneider Enclosure Systems have been developed to provide a weatherproof barrier for every type of installation. Modern process measurement instrumentation needs protection not only from the effects of sun, rain, frost, aggressive atmosphere or dirt but also from accidental damage or unauthorized access.

The Enclosure Manifolds allow direct mounting to a baseplate or a back plate of the enclosures. A lot of accessories such as electrical heating systems, thermostats, junction boxes, grommets and pipestands are available. Designed and fitted out to customer's specifications AS-Schneider is supplying the complete solution - enclosure, manifolds and all accessories needed – for an easy on-site installation. For more details please contact the factory.

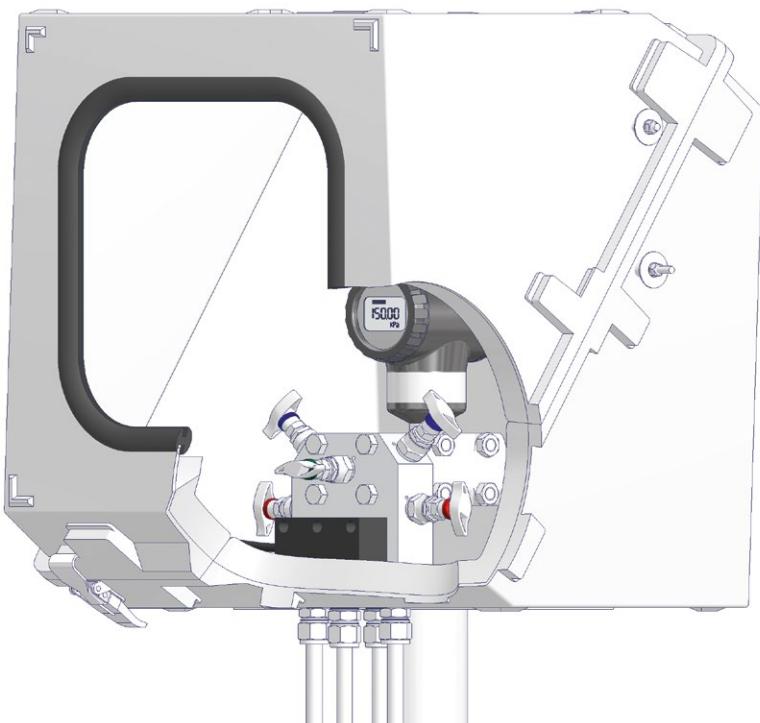

Manifold Mounting Options

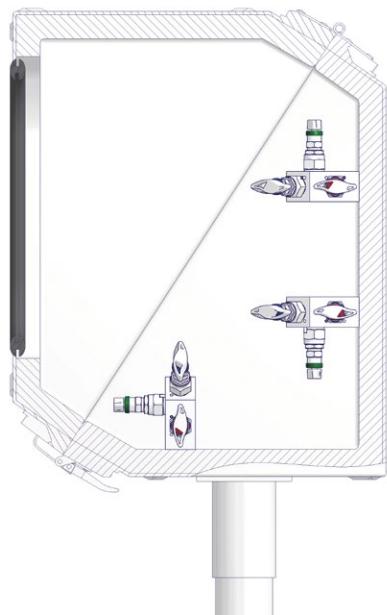

Enclosure Manifolds EDM Series

Ordering Information

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16																								
E	5	A	A	S	A	-	N	4	T	D	-	R																											
E Enclosure Manifolds EDM Series																																							
Quantity Bonnets – 2-5																																							
Manifold Specifics																																							
A	Standard - 2 Valve / 5 Valve Manifold with Vent Ports 1/4 NPT Female, 3 Valve Manifold without Vent Port																																						
C	Vent 1/4 NPT with Tube Fitting 12 mm																																						
U	Upstream Vent Type (5 Valve Manifold only)																																						
Inlet x Outlet Configuration																																							
A	Female x Flanged	D	1/2 NPT with Tube Fitting x Female																																				
B	1/2 NPT with Tube Fitting x Flanged	E	Female x Swivel Nut																																				
C	Female x Female	F	1/2 NPT with Tube Fitting x Swivel Nut																																				
Material																																							
S	1.4401 / 1.4404 / 316 / 316L	F	Duplex UNS S31803	B	6Mo UNS S31254																																		
M	Alloy 400 UNS N04400	D	Super Duplex UNS S32750	T	Titanium Grade 2																																		
H	Alloy C-276 UNS N10276	V	Alloy 625 UNS N06625																																				
Bonnet																																							
A	PTFE	K	O-Ring FKM (FPM by ISO)																																				
B	Graphite	W	Carbon filled PTFE – TA-Luft																																				
D	ISO FE Series Type 1	2	Bellows sealed PN 100																																				
E	ISO FE Series Type 3	4	Bellows sealed PN 250																																				
Inlet																																							
Thread Type			Fitting Type																																				
N	NPT	C	Single Ferrule Tube Fitting																																				
		K	Twin Ferrule Tube Fitting																																				
Thread Size			Tube Fitting Sizes																																				
2	1/4	4	12 resp. 12S																																				
4	1/2	5	14 resp. 14S																																				
		9	1/2"																																				
Outlet																																							
Thread Size - 2 Valve Manifolds only			Transmitter Interface																																				
N4	1/2 NPT Female	TD	DIN EN 61518-A																																				
G4	G 1/2 Swivel Nut	TE	DIN EN 61518-B																																				
M4	M 20 x 1.5 Swivel Nut	TF	Rosemount 2051/3051 Coplanar™ Pressure Transmitter																																				
Options - Specify in alphabetical order (digits first, then letters)																																							
B	Cleaned and Lubricated for Oxygen Service – For PTFE Packing only																																						
F	PTFE Soft Tip																																						
G	POM Soft Tip																																						
S	Stellite Valve Tip																																						
A	Vent Ports Plugged																																						
P	Power Piping ASME B31.1 – For Graphite Packing only																																						
K	Arctic Operations (-55°C (-67°F)) – For PTFE Packing only																																						
M	Wetted Parts with 3.1 certificate																																						
Operation Options																																							
J	Stainless Steel Handwheel with Locking Plate Design																																						
T	Anti-Tamper Bonnet (Key to be ordered separately)																																						
R	Anti-Tamper Bonnet (1 Key supplied per Valve/Manifold)																																						
Q	AT-Key Lock Bonnet Design																																						
U	Padlock for Anti-Tamper Bonnet / AT-Key Lock Bonnet Design																																						
W	Stainless Steel Handwheel																																						
Standard Accessory Kits for Manifold to Transmitter mounting according to DIN EN 61518 / IEC 61518																																							
1	Hex Cap Screw 7/16-20 UNF, Bolt Length 2", C.S., PTFE Seal Rings																																						
2	Hex Cap Screw 7/16-20 UNF, Bolt Length 2", S.S., PTFE Seal Rings*																																						
3	Hex Cap Screw 7/16-20 UNF, Bolt Length 2", C.S., Graphite Seal Rings																																						
4	Hex Cap Screw 7/16-20 UNF, Bolt Length 2", S.S., Graphite Seal Rings*																																						

* Bolt Material S.S. = 316 Stainless Steel | ASTM A193 B8M Class 2

Wetted Parts according to a.m. material list are supplied according to NACE MR0175/MR0103 and ISO 15156 (latest issue) - except Titanium Grade 2.
Note: Not every configuration which can be created in the ordering information is feasible / available.

3 and 5 Valve Manifolds for Differential Pressure Gauges




Differential Pressure Gauge Manifolds

AS-Schneider Manifolds for Differential Pressure Gauges are available with a center to center distance of 37 mm or 54 mm as standard. The instrument connections are supplied with a Swivel Nut or a Swivel Male Connection. The standard vent connection is 1/4 NPT female. Pipe plugs are not installed as standard. For plugged vent ports (factory installed) and other options see Page 47 – Ordering Information Differential Pressure Gauge Manifolds. Accessories like Swivel Gauge Adaptors, Vent Valves etc. see Pages 48-53.

The dimensions shown apply only to the illustrated valves (G 3/8 Threaded) – if you need the dimensions for your individual type or should you still not find your options at all please contact the factory.





3 Valve Manifolds for Differential Pressure Gauges

D3 Type

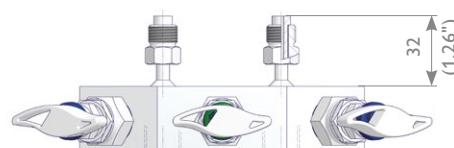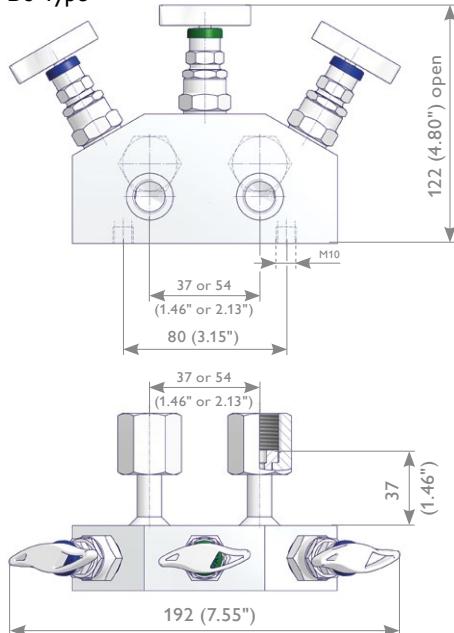

5 Valve Manifolds for Differential Pressure Gauges

D5 Type

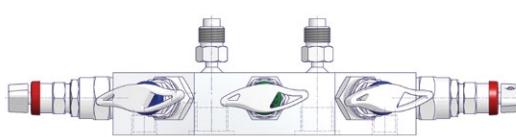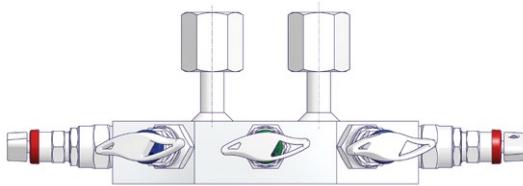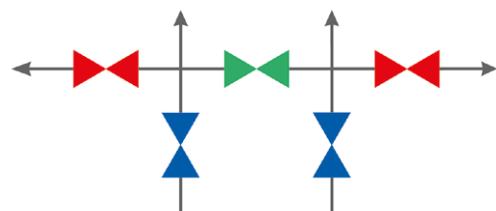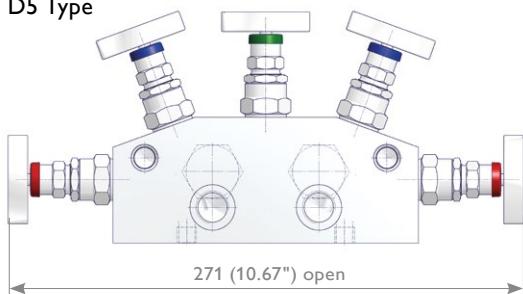

Inlet Configurations

Female Thread



G3/8




1/2 NPT

Male Connector



G1/2

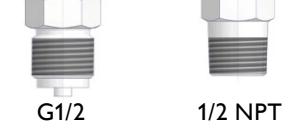

1/2 NPT

Tube Fitting



Mounting Bracket
AKM-D Type

See also Page 48.



3 and 5 Valve Manifolds for Differential Pressure Gauges

Ordering Information

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
D	3	B	B	S	A	-	H	3	G	2	-	8	M		
D Differential Pressure Gauge Manifolds															
Quantity Bonnets ~ 3 or 5															
Manifold Specifics															
Thread Size Inlet x Distance from Center to Center for Differential Pressure Gauge															
A	G 3/8 x 37 mm	C	1/2 NPT x 37 mm												
B	G 3/8 x 54 mm	D	1/2 NPT x 54 mm												
Inlet x Outlet Configuration															
A	Female x Swivel Nut	D	Tube Fitting x Swivel Male												
B	Female x Swivel Male	E	Male Connector x Swivel Nut												
C	Tube Fitting x Swivel Nut	F	Male Connector x Swivel Male												
Material															
S	1.4401 / 1.4404 / 316 / 316L	F	Duplex UNS S31803	B	6Mo UNS S31254										
M	Alloy 400 UNS N04400	D	Super Duplex UNS S32750	T	Titanium Grade 2										
H	Alloy C-276 UNS N10276	V	Alloy 625 UNS N06625												
Bonnet															
A	PTFE	K	O-Ring FKM (FPM by ISO)												
B	Graphite	W	Carbon filled PTFE – TA-Luft												
D	ISO FE Series Type 1	2	Bellows sealed PN 100												
E	ISO FE Series Type 3	4	Bellows sealed PN 250												
Inlet															
Thread Type		Fitting Type		Tube Fitting Sizes											
N4	1/2 NPT	C	Single Ferrule Tube Fitting	4	12 resp. 12S										
H3	G 3/8 – DIN 3852 (Female only)	K	Twin Ferrule Tube Fitting	5	14 resp. 14S										
G4	G 1/2 – EN 837-1 (Male only)			9	1/2"										
Outlet															
Thread Type															
G2	G 1/4 Swivel Male														
G4	G 1/2 Swivel Nut or Swivel Male														
M4	M 20 x 1.5 Swivel Nut														
Options - Specify in alphabetical order (digits first, then letters)															
B	Cleaned and Lubricated for Oxygen Service – For PTFE Packing only														
F	PCTFE Soft Tip														
G	POM Soft Tip														
S	Stellite Valve Tip														
A	Vent Ports Plugged														
H	10,000 psi (689 bar) for PTFE Packing I 7,252 psi (500 bar) for Graphite Packing														
P	Power Piping ASME B31.1 – For Graphite Packing only														
K	Arctic Operations (-55°C (-67°F)) – For PTFE Packing only														
M	Wetted Parts with 3.1 certificate														
Operation Options															
J	Stainless Steel Handwheel with Locking Plate Design														
T	Anti-Tamper Bonnet (Key to be ordered separately)														
R	Anti-Tamper Bonnet (1 Key supplied per Valve/Manifold)														
Q	AT-Key Lock Bonnet Design														
U	Padlock for Anti-Tamper Bonnet / AT-Key Lock Bonnet Design														
W	Stainless Steel Handwheel														
Accessory Kits															
7	CST Mounting Bracket AKM-D Type for 2" Pipe Mounting supplied separately – For Vertical Impulse Piping Installations														
8	SST Mounting Bracket AKM-D Type for 2" Pipe Mounting supplied separately – For Vertical Impulse Piping Installations														

Wetted Parts according to a.m. material list are supplied according to NACE MR0175/MR0103 and ISO 15156 (latest issue) - except Titanium Grade 2.




Note: Not every configuration which can be created in the ordering information is feasible / available.

Accessories – Mounting Bracket Kits

Mounting Bracket Kits for Vertical Impulse Piping Installations




AKM-S Type

For Valves and Manifolds with
1 1/4" Square Valve Body
(Type H, G, M and S)

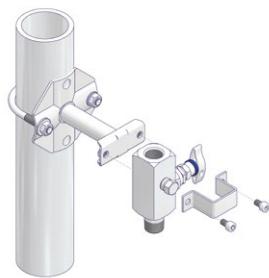


AKM-R Type

For Manifolds with 1 1/4" Flat Body
(Type P and R)

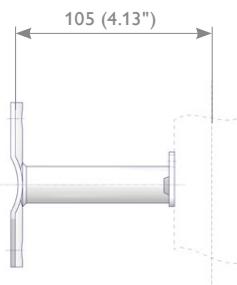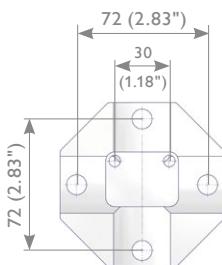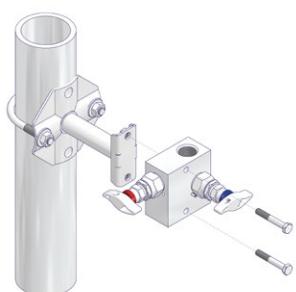


AKM-G Type

For Double Block & Bleed Manifolds
(Type C)

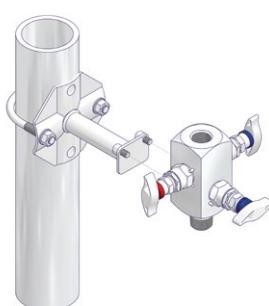



AKM-D Type and AKM-C Type

For Manifolds Type D, W and 5

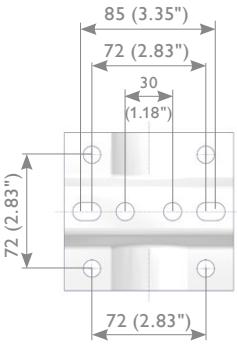

AKM-B Type

For Wafer Style Manifolds with
Bottom Inlet Design

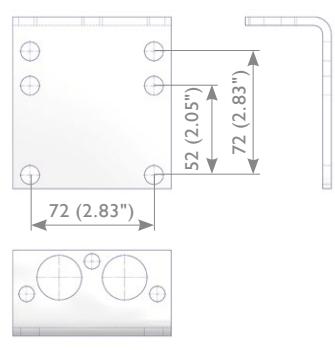
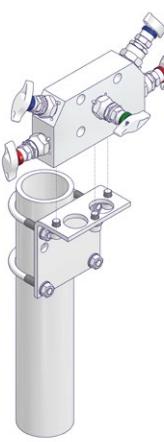


Accessories – Mounting Bracket Kits

Mounting Bracket Kits for Horizontal Impulse Piping Installations

AKM-T Type


For Integral Manifolds – Traditional Style

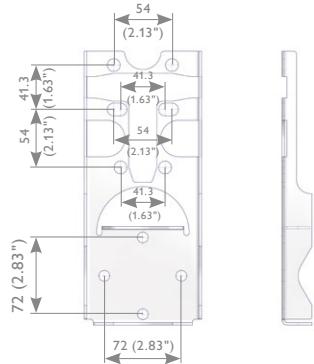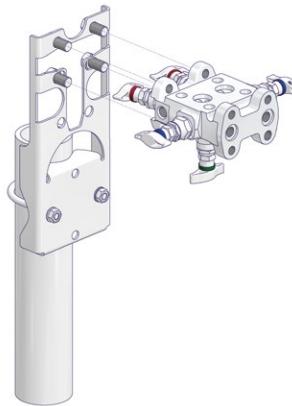

Mounting Bracket Kits for Horizontal and Vertical Impulse Piping Installations

AKM-U Type

For Manifolds Type H, W and T

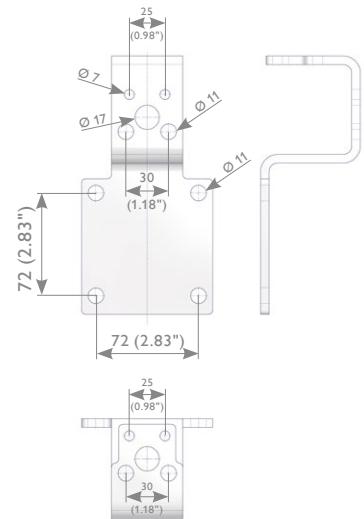

Ordering Information

	1	2	3	4	5	6	7	8	9
A	K	M	-	S	P	S	-		
AKM Mounting Bracket Kits									
Mounting Bracket incl. screws for mounting the bracket to the manifold (if applicable)									
S	Valves and Manifolds with 1 1/4" Square Valve Body (Type H, G, M and S)								
R	Manifolds with 1 1/4" Flat Body (Type P and R)								
G	Manifolds Type C								
D	Manifolds Type D, W and 5								
B	Wafer Style Manifolds with Bottom Inlet Design								
U	Manifolds Type H (not for Integral Manifolds for Rosemount 2051/3051 Coplanar™ Pressure Transmitters)								
	Manifolds Type W (except Bottom Inlet Design)								
	Manifolds Type T								
C	Integral Manifolds - Coplanar™ Style								
T	Integral Manifolds - Traditional Style								
Mounting Method									
P	2" Pipe Mounting – incl. 'U' Bolt, Nuts and Washers								
Material									
C	Carbon Steel zinc plated (only available Mounting Bracket Kit AKM-D and AKM-C)								
S	316 Stainless Steel								
H	Mandatory for Manifolds Type H and U-Type Bracket (incl. Spacer)								

Mounting Bracket Kit


Mounting Bracket Kits on Page 48 and 49 are containing:

- Mounting Bracket
- 'U' Bolts*
- Washers – 8.4*
- Hexagon Nuts M18*
- Screws and Washers for Mounting the Manifold to the Bracket – if applicable

* Amount depending on bracket type.
See illustrations.

Accessories – Manifold to Transmitter Mounting acc. to DIN EN 61518

Accessory Kits for Manifold to Transmitter Mounting according to DIN EN 61518 / IEC 61518

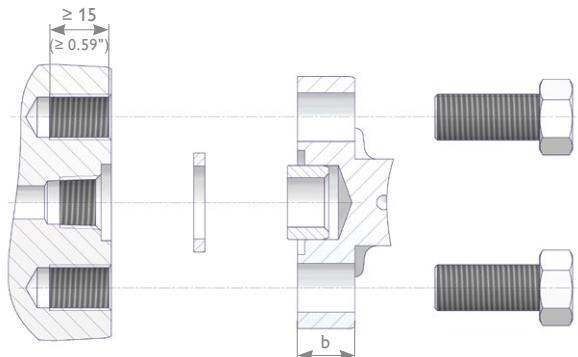

b = Depending on manifold thickness

Ordering Information

			1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16																						
			A	K	S	-	H	U	4	C	-	P	A	F	4	4																								
AKS Transmitter Mounting Kit																																								
Type of Screw																																								
H Hex Cap Screw																																								
S Socket Head Cap Screw																																								
Thread Size																																								
U 7/16-20 UNF – For Traditional Style Manifolds (see page 34-37) please use Option Code W – Incl. washer																																								
M M10 – Max. allowable (Working) Pressure (PS): 160 bar (2,320 psi) – Screws supplied with Washer																																								
W 7/16-20 UNF – Screws supplied with Washers																																								
Number of Screws and Seal Rings																																								
2	2 Screws and 1 Seal Ring	I	For 2 Valve Manifolds and Oval Flanges																																					
4	4 Screws and 2 Seal rings	I	For Differential Pressure Manifolds																																					
5	4 Screws and 1 Seal Ring	I	For 2 Valve Manifolds Type H2A - For Gauge/Absolute Pressure Transmitters																																					
8	4 Screws and 4 Seal Rings	I	For Wafer Style Manifolds together with Oval Flanges - Screw Length 2 3/4"																																					
Material*																																								
C	Carbon Steel	I	UNF Thread: Hex Cap Screw ASTM A449 - Type 1 Socket Head Cap Screw ASTM A574 Metric Thread: ISO 898-1 Class 8.8																																					
S	316 Stainless Steel	I	UNF Thread: ASTM A193 B8M Class 2 Metric Thread: ISO 3506 A4-70																																					
F	316 Stainless Steel	I	UNF Thread: ASTM F593 GP2 CW																																					
Seal Ring																																								
DIN EN 61518 Type A									DIN EN 61518 Type B																															
PA	PTFE	PB	PTFE																																					
GA	Graphite	GB	Graphite																																					
FA	O-Ring FPM (FKM by ASTM)																																							
Screw Length																																								
UNF Thread									Metric Thread																															
F25	1"	M25	25 mm																																					
F38	1 1/2"	M40	40 mm																																					
F44	1 3/4"	M45	45 mm																																					
F51	2"	M50	50 mm																																					
F70	2 3/4" (For Wafer Style Manifold c/w Oval Flange)																																							
F76	3" (For Rosemount 2051/3051 Coplanar™ Pressure Transmitter)																																							
Option																																								
B	Cleaned for Oxygen Service (only for PTFE Seal Ring → Carbon filled PTFE)																																							

! * IEC 61518 calls for the mentioned mechanical properties (for example B8 Class 2) because the flange connection is designed for high pressure service (up to 6,000 psi) and high temperature service. The usage of screws without the defined mechanical properties is critical and may lead to a sudden component failure which could cause a fatal accident!

Accessories – Pipe Plugs, Vent Valves, Adaptors

Vent Valves, Pipe Plugs and Pipe Fittings

Vent Valve
VS Type





Accessories – Swivel Gauge Adaptors


Swivel Gauge Adaptors

The Swivel Gauge Adaptors enable the easy positioning of the pressure instrument in any direction through 360°. The dimensions shown apply only to the illustrated components – if you need the dimensions for your individual type please contact the factory.

GS Type

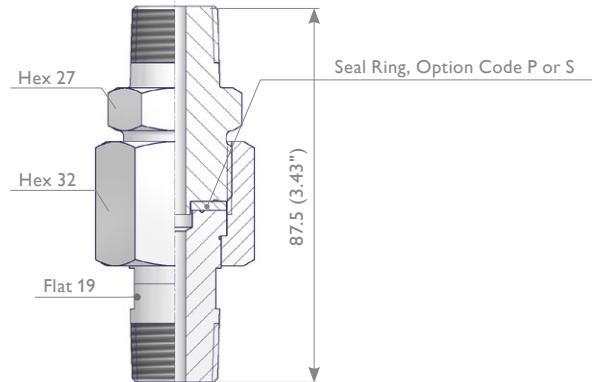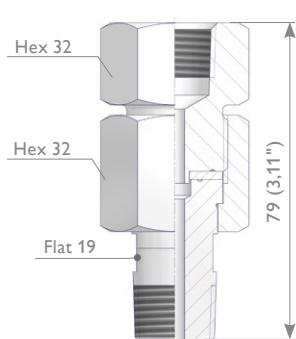

GD Type

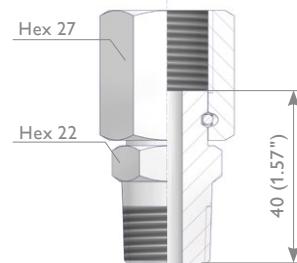

Ordering Information - Swivel Gauge Adaptors

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
G	S	-	M	M	S	P	-	N	4	N	4	-	B		
GS* Swivel Gauge Adaptors – Screwed Design (10,000 psi / 689 bar)															
GD Swivel Gauge Adaptors – Wire Design (6,092 psi / 420 bar)															
Inlet															
M	Male		F	Female											
Outlet															
M	Male		S	Swivel Nut (GD Type – G 1/2, Option Code G4 only)											
F	Female														
Material															
S	1.4401 / 1.4404 / 316 / 316L		F	Duplex UNS S31803		B	6Mo UNS S31254								
M	Alloy 400 UNS N04400		D	Super Duplex UNS S32750		T	Titanium Grade 2								
H	Alloy C-276 UNS N10276		V	Alloy 625 UNS N06625											
Seal Ring															
P	PTFE (GS Type only)														
S	Same Material as threaded components (GS Type only)														
A	No Seal Ring required (GD Type only)														
Inlet															
Thread Type		Thread Size													
N	NPT	2	1/4												
G	BSP Parallel (G) – EN 837-1	4	1/2												
H	BSP Parallel (G) – DIN 3852 (GD Type only)														
Outlet															
Thread Type		Thread Size													
N	NPT	2	1/4												
G	BSP Parallel (G) – EN 837-1	4	1/2												
Options - Specify in alphabetical order (digits first, then letters)															
B	Cleaned for Oxygen Service														
M	Wetted Parts with 3.1 certificate														



* GS Type only: NPT Threaded Options as standard.

Wetted Parts according to a.m. material list are supplied according to NACE MR0175/MR0103 and ISO 15156 (latest issue) - except Titanium Grade 2.



Accessories – Oval Flanges, Anti-Tamper Key

Oval Flanges KF Type

Transmitter Interface EN 61518-A Code TD

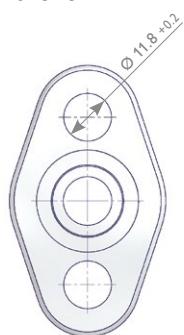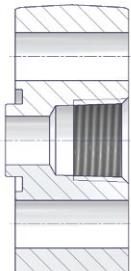

Transmitter Interface EN 61518 Code T4

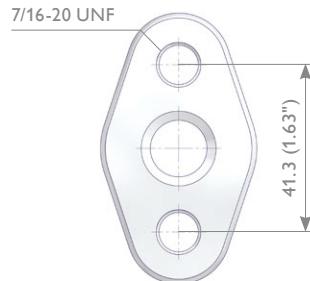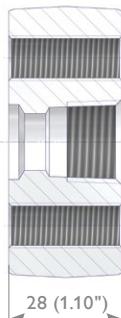

Ordering Information - Oval Flange (Kidney Flange, Futbol)

1	2	3	4	5	6	7	8	9	10	11	12
K	F	F	S	-	N	4	T	D	-	1	

KF Oval Flange

Inlet

F Female

Material

S	1.4401 / 1.4404 / 316 / 316L	F	Duplex UNS S31803	B	6Mo UNS S31254
M	Alloy 400 UNS N04400	D	Super Duplex UNS S32750	T	Titanium Grade 2
H	Alloy C-276 UNS N10276	V	Alloy 625 UNS N06625		

Material Option S as forging, all other materials made from flat bar

Inlet

Thread Type	Thread Size
N	NPT
H	BSP Parallel (G) – DIN 3852

Outlet (Flange Connection)

TD	Transmitter Interface DIN EN 61518-A
T4	Transmitter Interface DIN EN 61518

Options - Specify in alphabetical order (digits first, then letters)

B Cleaned for Oxygen Service (if ordered with Transmitter Mounting Kit – Only with PTFE Seal Ring available)

Accessory Kits for Oval Flange to Manifold/Transmitter mounting according to DIN EN 61518 – only applicable for Outlet Option TD and TE

1	2 Hex Cap Screws 7/16-20 UNF, Carbon Steel ASTM A449 - Type 1, 1 PTFE Seal Ring
2	2 Hex Cap Screws 7/16-20 UNF, Stainless Steel ASTM A193 B8M Cl.2, 1 PTFE Seal Ring
3	2 Hex Cap Screws 7/16-20 UNF, Carbon Steel ASTM A449 - Type 1, 1 Graphite Seal Ring
4	2 Hex Cap Screws 7/16-20 UNF, Stainless Steel ASTM A193 B8M Cl.2, 1 Graphite Seal Ring

Wetted Parts according to a.m. material list are supplied according to NACE MR0175/MR0103 and ISO 15156 (latest issue) - except Titanium Grade 2.

Anti-Tamper Key ATK Type

ATK-ES Type




Check Valves

Check Valves CV Type

AS-Schneider Check Valves (Non-Return Valves) are designed for a cold (Working) Pressure rating of 10,000 psi (689 bar). The Check Valve allows flow in one direction only, closing when flow reverses. Should you still not find your option please contact the factory.

Features

- Soft Seated – O-Rings use-d are RGD (Rapid Gas Decompression) resistant
- Cracking Pressure: < 11 psi (0.75 bar)
- Re-Seal Pressure: < 20 psi (1.38 bar)
- Temperature Rating: -50°C up to +200°C (-58°F up to +392°F), depending on seal materials used
- 100% Pressure Tested – hydrostatically at 1.5 times the max. allowable (Working) Pressure (PS)
- Cv-Value: 0.3

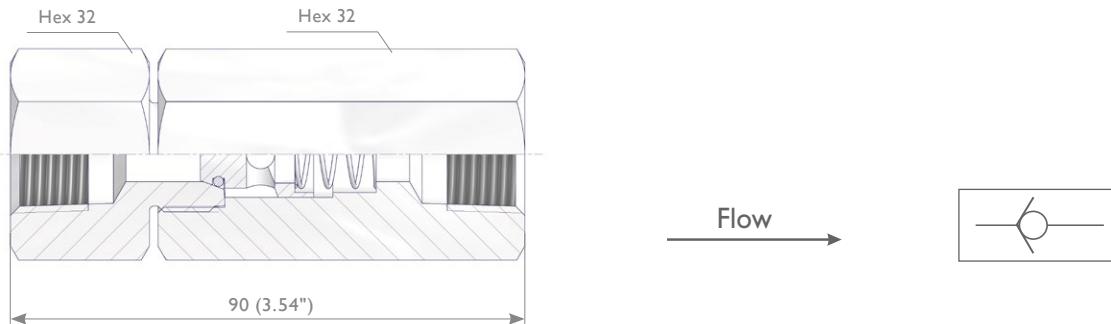

Ordering Information - Check Valves

1	2	3	4	5	6	7	8	9	10	11	12	13	14		
C	V	F	F	S	K	-	N	4	N	4	-	M			
CV Check Valve															
Inlet															
M	Male	F	Female												
Outlet															
F	Female														
Material															
S	1.4401 / 1.4404 / 316 / 316L	F	Duplex UNS S31803	B	6Mo UNS S31254										
M	Alloy 400 UNS N04400	D	Super Duplex UNS S32750	T	Titanium Grade 2										
H	Alloy C-276 UNS N10276	V	Alloy 625 UNS N06625												
Seal Ring															
K	FKM – Fluorocarbon Rubber														
N	HNBR – Hydrogenated Nitrile Butadiene Rubber														
P	FFKM – Perfluorinated Rubber														
Inlet															
N2	1/4 NPT														
N4	1/2 NPT														
Outlet															
N2	1/4 NPT														
N4	1/2 NPT														
Options - Specify in alphabetical order (digits first, then letters)															
M	Wetted Parts with 3.1 certificate														


Wetted Parts according to a.m. material list are supplied according to NACE MR0175/MR0103 and ISO 15156 (latest issue) - except Titanium Grade 2.
Note: Check Valves which are not actuated for a period of time may initially crack at a higher pressure than above stated.

Complementary Products

Complementary Products

In this catalogue the following products are not described in detail because they are covered in catalogue AS-0201:


Gauge Protectors

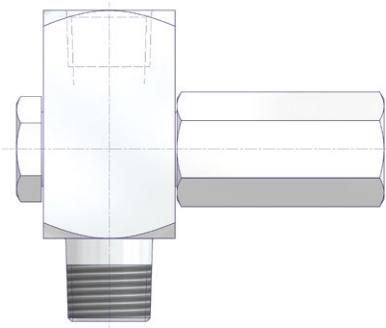


Gauge Snubbers




Compact Syphons

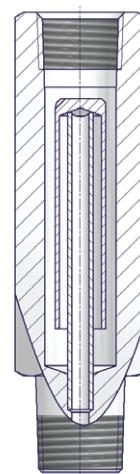

Coil Type Syphons / Pigtail Syphons

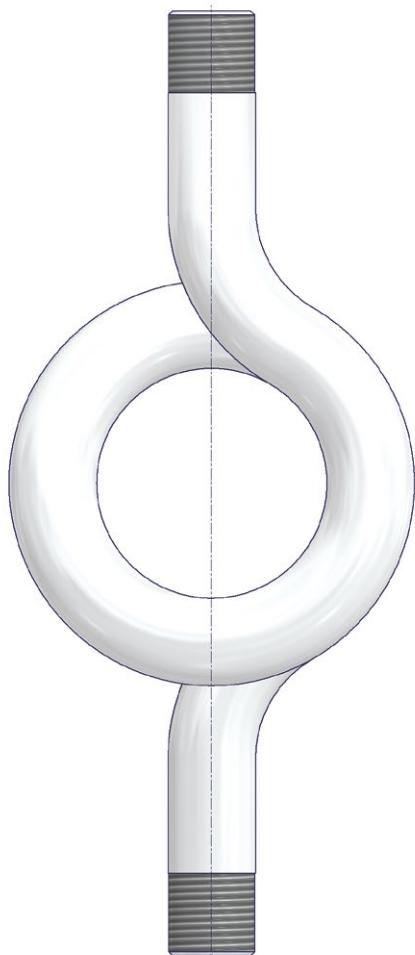

Elbows

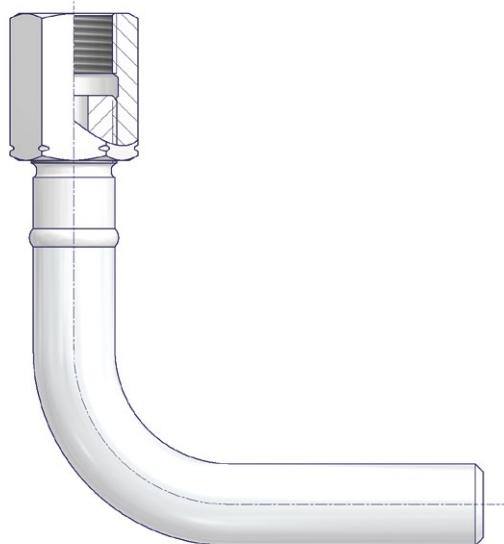

Technical Service Portal - Digital Valve Plate

Digital Valve Plate for Valves and Manifolds

The E Series Valves and Manifolds manufactured by the AS-Schneider Group are now marked with an unique QR-code. That QR-code provides easy access to static product information like material properties, certificates and physical dimensions via CAD drawings. It also includes operating and installation instructions or spare parts or replacement information.

Product Details



Operating Instructions



Individual Drawings



Spare Part Service




Technical Support



How it works

If you have an AS-Schneider valve or manifold with QR-code in your hand or installed in your plant, you can now access the product information very easy. The access is straightforward:

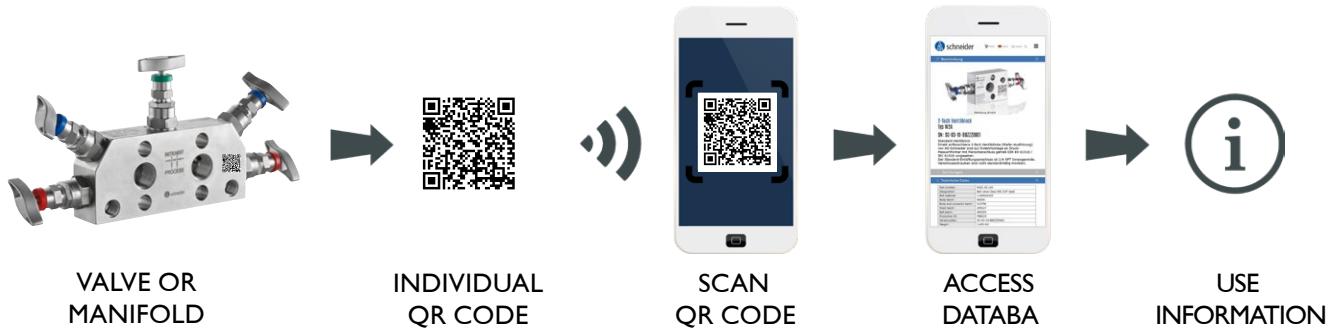

Maintenance Benefits

All technically relevant information on the product can always be retrieved directly.

Clear planning

More straightforward planning and installation via the mechanical properties of the product.

Error-free assembly

Automated error free equipment identification at the incoming good inspection and during the field installation.

Easy and fast maintenance

Easier and faster maintenance and repair cycles. This is possible due to direct access to spare parts or replacement units.

Link to asset management tool

Operators link this information into their respective asset and operation management system.

Environmental friendly

The environmentally responsible disassembly and disposal.

Check the DVP of your valves and manifolds:
www.qr4v.de

