

Isolation Amplifier IS 2400

Isolation and Conversion of Process Signals

in Standard Applications

The Isolation Amplifier IS 2400 is used for isolation and conversion of 0 \dots 20 mA, 4 \dots 20 mA and 0 \dots 10 V standard signals.


Its high level of reliability and cost optimized design make the **IS** 2400 the first choice in its class!

Unique in its price class, the **IS** 2400 provides application flexibility thanks to the calibrated range selection and the new universal power pack.

The desired input and output range can be easily set by using DIP switch and due to the calibrated range selection no further adjustment is necessary.

The slim housing with 12.5 mm width saves space in the switch cabinet and facilitates by the practical plug-in screw terminal blocks the assembly. For range selection a simple housing unblocking is installed which makes it possible to reach easily all control elements on the mounting rail.

In cause of the new universal power pack for 20 ... 253 V AC/DC the Isolation Amplifier **IS** 2400 is applicable world-wide for all common supply voltages.



- Cost optimized design Economical separation for standard applications
- Calibrated signal setting Input and output range can be set by using DIP switch - without any further adjustment
- Universal power pack for 20 ... 253 V AC/DC Applicable world-wide for all common supply voltages
- 3-port isolation


Protection against erroneous measurements due to parasitic voltages or ground loops

- Ultra-small-sized housing 12.5 mm housing with plug-in screw terminal blocks
- Maximum reliability No maintenance costs
- 5 Years Warranty

Defects occurring within 5 years from delivery date shall be remedied free of charge at our plant (carriage and insurance paid by sender)



Block diagram

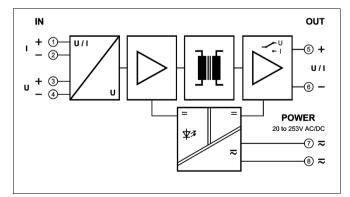




Technical Data

| Input | | |
|--|--|--|
| Input signal | 0 20 mA 4 20 mA | 0 10 V |
| (calibrated switchable) | | |
| Input resistance | Current input | 22 Ω |
| | Voltage input | 1 ΜΩ |
| Overload | Current input | ≤ 200 mA |
| | Voltage input | Voltage limitation via 30 V Z-Diode, max. continuous current 30 mA |
| Output | | |
| Output signal | 0 20 mA 4 20 mA | 0 10 V |
| (calibrated switchable) | | |
| Load | Current output | \leq 10 V (500 Ω at 20 mA) |
| | Voltage output | \leq 10 mA (1 k Ω at 10 V) |
| Residual ripple | $< 20 \text{ mV}_{rms}$ | |
| General Data | | |
| Transmission error | < 0.3 % full scale | |
| Temperature coefficient ¹⁾ | < 150 ppm/K | |
| Cut-off frequency -3 dB | 1 kHz | |
| Response time T ₉₉ | 0.7 ms | |
| Test voltage | 2.5 kV AC, 50 Hz, 1 min. | Input against output against power supply |
| Working voltage ²⁾ (Basic Insulation) | 600 V AC/DC for overvoltage category II and pollution degree 2 acc. to EN 61010-1 | |
| Ambient temperature | Operation | - 10 to + 60 °C (+ 14 to + 140 °F) |
| | Transport and storage | - 20 to + 80 °C (- 4 to + 176 °F) |
| Power supply | 20 253 V AC/DC | AC 48 62 Hz, approx. 3 VA |
| | | DC approx. 1.5 W |
| EMC ³⁾ | EN 61326-1 | |
| Construction | 12.5 mm (0.49") housing, protection class IP 20, mounting on 35 mm DIN rail acc. to EN 60715 | |
| Weight | Approx. 100 g | |

1) Average TC related to full scale value in specified operating temperature range, reference temperature 23 °C
2) For applications with high working voltages, ensure there is sufficient spacing or isolation from neighboring devices and protection against electric shocks.
3) Minor deviations possible during interference

Dimensions

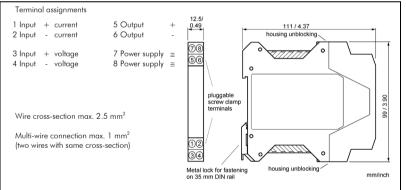

Subject to change!

Product line

| Device | Order No. |
|---|------------|
| Isolation Amplifier, calibrated range selection | IS 2400 AG |